
MIL-C-83723/75A
13 NOV 1975
SUPERSEDING
MIL-C-83723/75(USAF)
9 September 1971


MILITARY SPECIFICATION SHEET


CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), PLUG, (BAYONET COUPLING, CRIMP SOCKET CONTACT), (SERIES III, CLASSES A, G, AND R)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-83723.

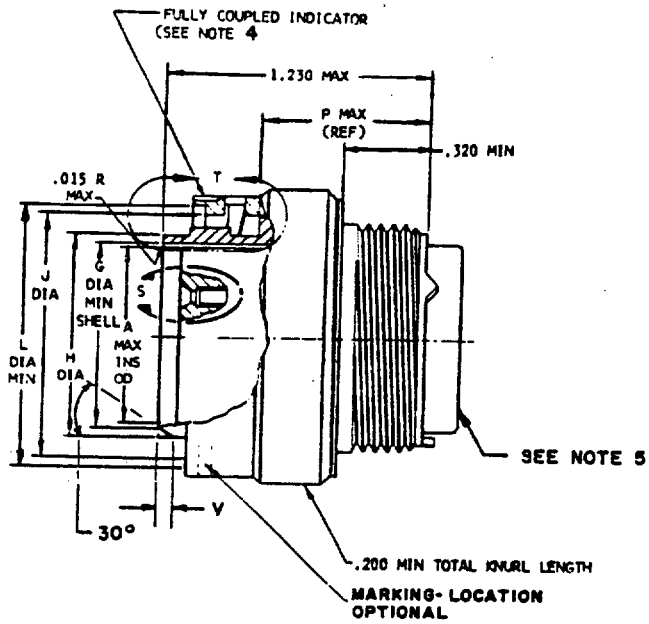


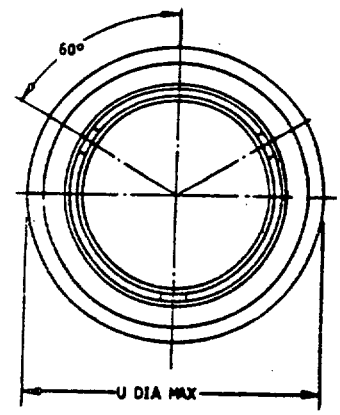



DETAIL T

COUPLING RING REMOVED FOR CLARITY

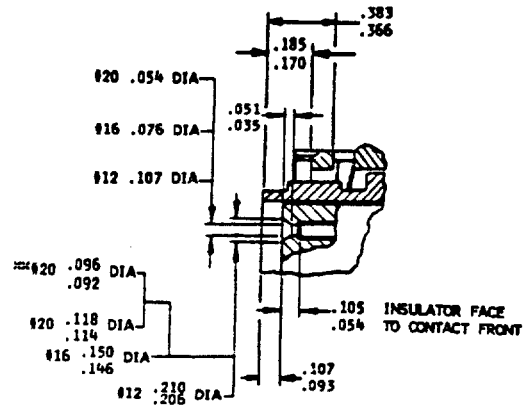


DETAIL S

****SEE TABLE II FOR CONTACT CAVITIES REQUIRING THIS DIMENSION

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

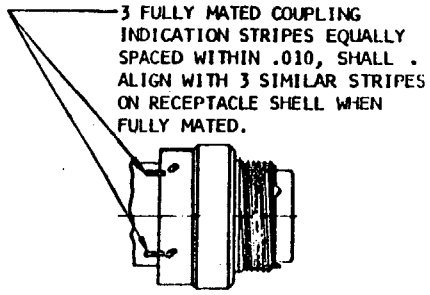

COUPLED POSITION

TABLE I. Connector dimensions.

SIZE	A	G	H	J	K	L	M	N	P	U	V	R
8	.312	.352	.424 .419	.540 .545	.552	.632	.234 .231	.632	.678	.776	.025	.087 .081
10	.388	.428	.526 .521	.662 .667	.552	.760	.285 .282	.760	.678	.906	.031	.087 .081
12	.558	.598	.696 .691	.832 .837	.552	.930	.370 .367	.930	.678	1.078	.031	.087 .081
14	.627	.667	.765 .760	.901 .906	.552	.999	.405 .402	.999	.678	1.141	.031	.087 .081
16	.772	.794	.892 .887	1.028 1.033	.552	1.126	.468 .465	1.126	.678	1.266	.031	.118 .112
18	.860	.900	.998 .993	1.134 1.139	.552	1.232	.521 .518	1.232	.678	1.375	.031	.118 .112
20	.985	1.025	1.123 1.118	1.261 1.266	.552	1.357	.583 .580	1.357	.678	1.510	.031	.118 .112
22	1.110	1.150	1.248 1.243	1.384 1.389	.552	1.482	.646 .643	1.482	.678	1.625	.031	.118 .112
24	1.235	1.275	1.373 1.368	1.511 1.516	.552	1.607	.708 .705	1.607	.678	1.760	.031	.118 .112

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.010	.25	.285	7.24	.646	16.41	1.010	25.65	1.375	34.93
.015	.38	.312	7.92	.662	16.81	1.025	26.04	1.384	35.15
.035	.89	.320	8.13	.667	16.94	1.028	26.11	1.389	35.28
.051	1.30	.352	8.94	.678	17.22	1.033	26.24	1.482	37.64
.054	1.37	.366	9.30	.691	17.55	1.070	27.18	1.507	38.28
.076	1.93	.367	9.32	.696	17.68	1.078	27.38	1.510	38.35
.081	2.06	.370	9.40	.705	17.91	1.110	28.19	1.511	38.38
.087	2.21	.383	9.73	.708	17,98	1.118	28.40	1.516	38.51
.092	2.34	.388	9.86	.760	19.30	1.123	28.52	1.607	40.82
.093	2.36	.402	10.21	.765	19.43	1.126	28.60	1.625	41.28
.096	2.44	.405	10.29	.766	19.46	1.130	28.70	1.760	44.70
.105	2.67	.419	10.64	.772	19.61	1.134	28.80	1.857	47.17
.107	2.72	.424	10.77	.794	20.17	1.139	28.93	2.092	53.14
.112	2.84	.428	10.87	.830	21.08	1.141	28.98	2.130	54.10
.114	2.90	.465	11.81	.832	21.13	1.150	29.21	2.134	54.20
.118	3.00	.468	11.89	.837	21.26	1.190	30.23	2.234	56.74
.125	3.18	.518	13.16	.860	21.84	1.230	31.24	2.265	57.53
.146	3.71	.521	13.23	.880	22.35	1.232	31.29	2.355	59.82
.150	3.81	.526	13.36	.887	22.53	1.235	31.37	2.364	60.05
.170	4.32	.540	13.72	.892	22.66	1.243	31.57	2.490	63.25
.177	4.50	.545	13.84	.900	22.86	1.248	31.70	2.589	65.76
.182	4.62	.552	14.02	.901	22.89	1.260	32.00	2.594	65.89
.185	4.70	.558	14.17	.906	23.01	1.261	32.03	2.722	69.14
.200	5.08	.580	14.73	.930	23.62	1.266	32.16	2.824	71.73
.206	5.23	.583	14.81	.950	24.13	1.275	32.39	2.845	72.26
.210	5.33	.598	15.19	.985	25.02	1.320	33:53	2.967	75.36
.231	5.87	.627	15.93	.993	25.22	1.357	34.47	3.064	77.83
.234	5.94	.632	16.05	.998	25.35	1.368	34.75	3.250	82.55
.282	7.16	.643	16.33	.999	25.37	1.373	34.87	4.784	121.51

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

TABLE II. Insert arrangements requiring reduced diameters for lead-in chamfer on contact cavities as indicated.

Shell size	Insert arrangements	Contact cavities
8	-3	1, 2, and 3
10	-6	1, 2, 3, 4, 5, 6

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are .005 (.13 mm) for three place decimals and .01 (.25 mm) for two place decimals. Angles ±1°.
4. Fully mated coupling indication stripes and polarization stripes shall be color coded blue. Stripes shall be .025 ±.010 wide.
5. Rear accessory interchangeability dimensions shall be in accordance with MIL-C-83723.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.


REQUIREMENTS:

Dimensions and configuration: See figure.

This connector mates with MIL-C-83723/72, 74, 79, 80, 81, 93, and 94.

For insert arrangements see MIL-STD-1554.

Part number example:

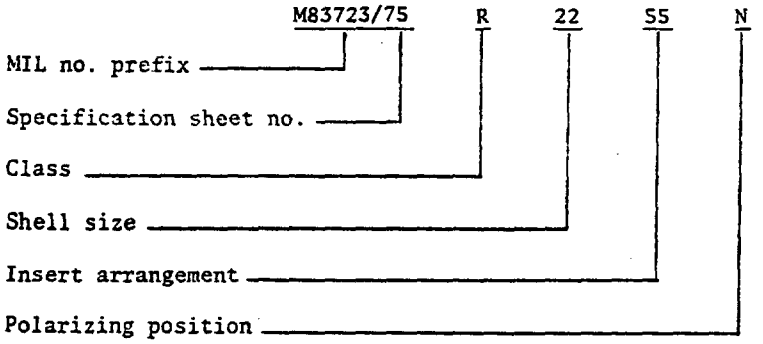

Custodians:
Army - EL
Navy - AS
Air Force - 85

Review activities:
Army - MI, MU
Navy - EC
Air Force - 11, 15, 17, 80
DSA - ES

User activities:
Army -
Navy -
Air Force -

Preparing activity:
Air Force - 85

(Project 5935-1948-5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-C-83723/75A Connectors, Electrical, (Circular, Environment Resisting

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER FSC 5935

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

C16061

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

FOLD

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE AIR FORCE
DoD-318

U.S.MAIL

AFLC/MMGE/Standardization
Wright-Patterson AFB OH 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.