INCH-POUND

MIL-C-83723/81D

27 December 1991

SUPERSEDING
MIL-C-83723/81C
31 Dec 1986

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE, (SINGLE HOLE MOUNT, BAYONET COUPLING, SOLDER PIN CONTACT), (SERIES III, CLASSES H AND Y)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

(D) The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of specifications and Standards (DODISS) specified in the solicitation: MIL-C-83723.

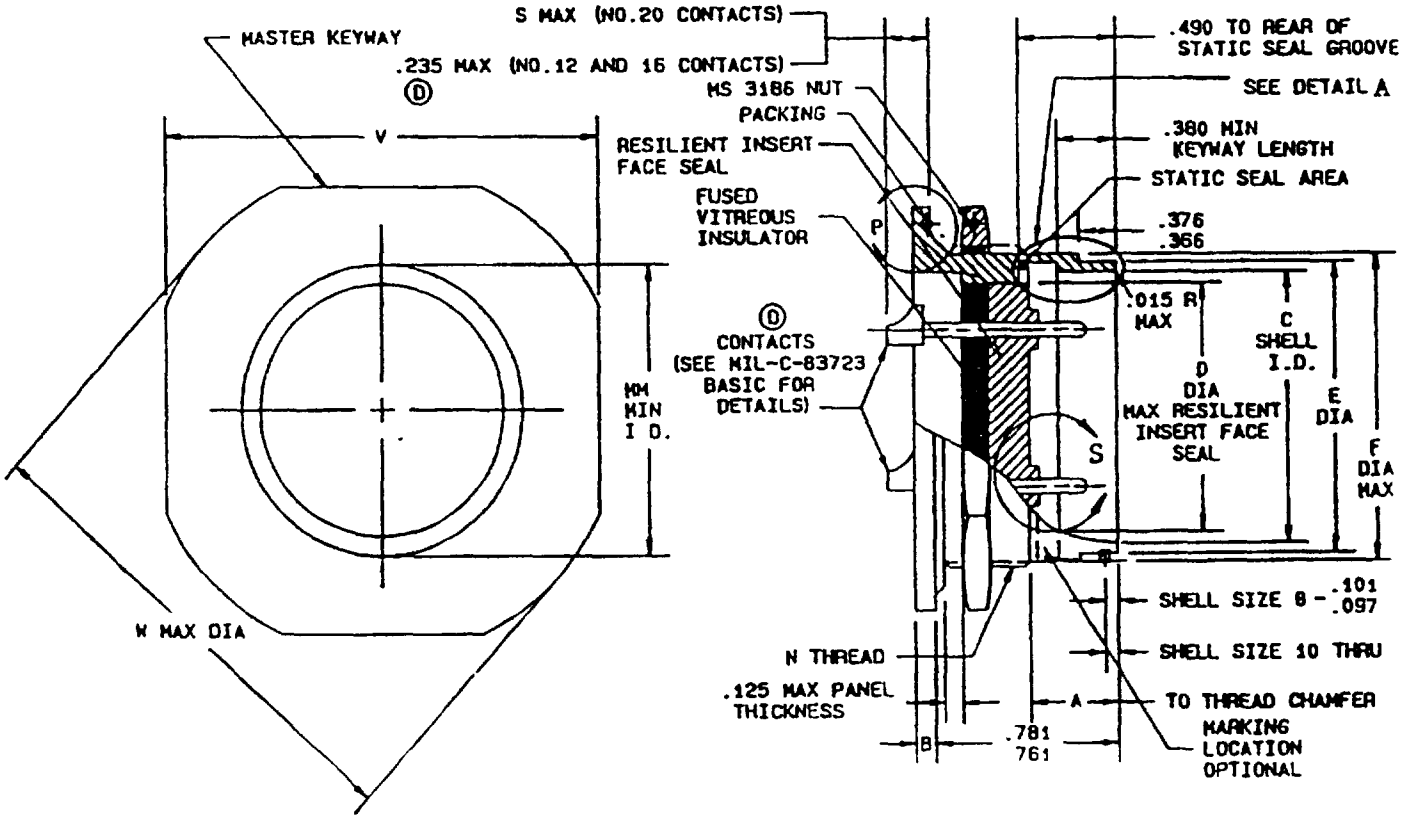


Figure 1. Dimensions and configuration.

D denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

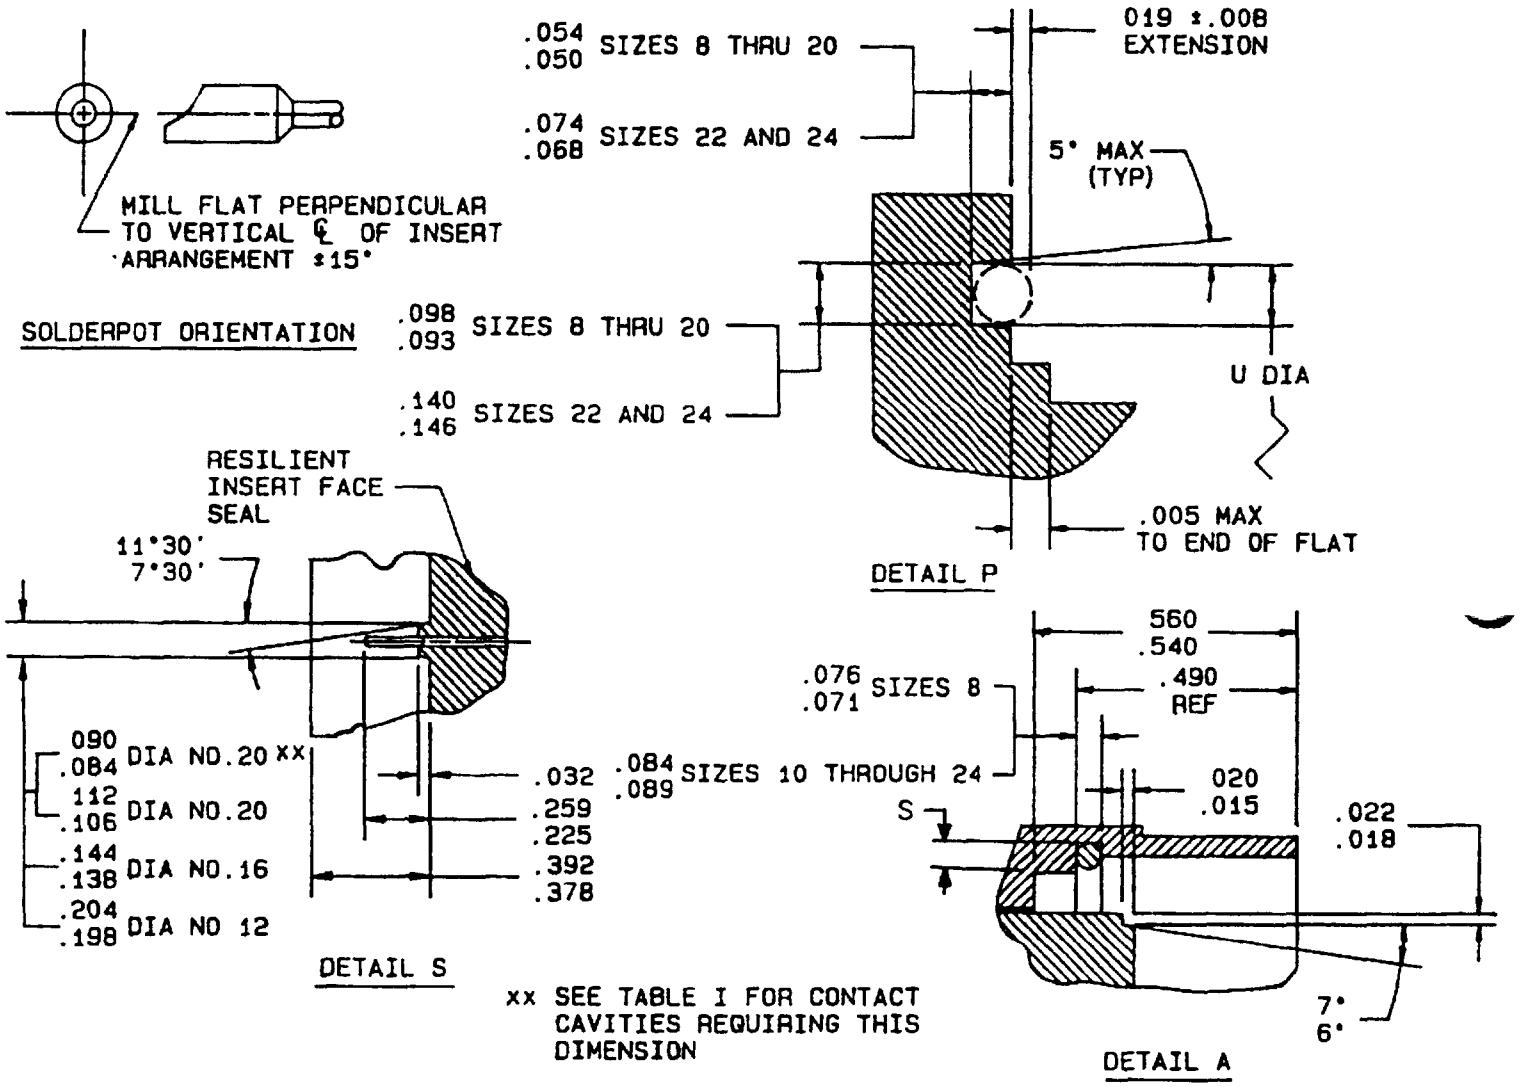


FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

(D)

Shell size	A	B	C	D	E	F	N thread
8	.481 .461	.137 .097	.428 .433	.312	.536 .531	.561	.625-20 UN-2A
10	.481 .461	.137 .097	.530 .535	.388	.659 .654	.696	.750-20 UNEF-2A
12	.481 .461	.137 .097	.700 .705	.558	.829 .824	.875	.9375-20 UNEF-2A
14	.481 .461	.137 .097	.769 .774	.627	.898 .893	.935	1.000-20 UNEF-2A
16	.481 .461	.137 .097	.896 .901	.772	1.025 1.020	1.062	1.125-20 UN-2A
18	.481 .461	.137 .097	1.002 1.007	.860	1.131 1.126	1.187	1.250-18UN-2A
20	.481 .461	.137 .097	1.127 1.132	.985	1.256 1.251	1.312	1.375-18 UNEF-2A
22	.481 .461	.168 .128	1.252 1.257	1.110	1.381 1.376	1.437	1.500-18 UNEF-2A
24	.481 .461	.168 .128	1.377 1.382	1.235	1.506 1.501	1.562	1.625-18 UNEF-2A

FIGURE 1. Dimensions and configuration - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

D

Shell size	U	V	W	EE	FF	MM	JJ
8	.670	.984 .974	1.068	.605	.635	.493	.596 .590
10	.777	1.109 1.099	1.192	.730	.760	.555	.721 .715
12	.965	1.296 1.286	1.192	.917	.947	.743	.908 .902
14	1.090	1.396 1.386	1.380	.980	1.010	.805	.971 .965
16	1.215	1.521 1.511	1.630	1.105	1.135	.931	1.096 1.090
18	1.340	1.646 1.636	1.756	1.229	1.260	1.055	1.220 1.214
20	1.465	1.771	1.860	1.354	1.385	1.243	1.345 1.339
22	1.574	1.959 1.949	2.068	1.479	1.510	1.305	1.470 1.464
24	1.699	2.084 2.074	2.160	1.604	1.635	1.493	1.595 1.589

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

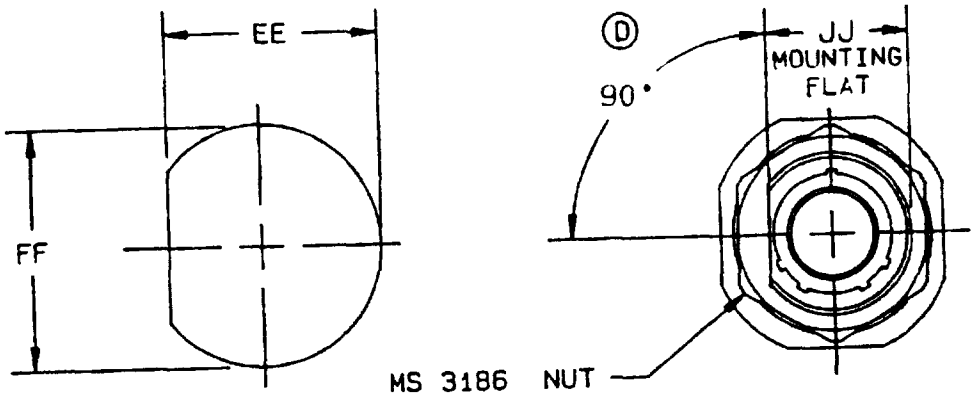

PANEL CUTOUT

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	0.08	.094	2.39	.312	7.92	.560	14.22	.761	19.33
.004	0.10	.097	2.46	.366	9.30	.561	14.25	.769	19.53
.005	0.13	.098	2.49	.376	9.55	.590	14.99	.772	19.61
.008	0.20	.101	2.57	.378	9.60	.596	15.14	.774	19.66
.015	0.38	.106	2.69	.380	9.65	.605	15.37	.777	19.74
.018	0.46	.112	2.84	.388	9.86	.625	15.88	.781	19.84
.019	0.48	.125	3.19	.392	9.96	.627	15.93	.805	20.45
.020	0.51	.128	3.25	.428	10.87	.635	16.13	.824	20.93
.022	0.56	.137	3.48	.433	11.00	.654	16.61	.826	20.98
.032	0.81	.138	3.51	.461	11.71	.659	16.74	.829	21.06
.050	1.27	.140	3.58	.481	12.22	.670	17.02	.860	21.84
.054	1.37	.144	3.66	.490	12.45	.696	17.68	.875	22.23
.071	1.80	.146	3.71	.493	12.52	.700	17.78	.893	22.68
.068	1.73	.165	4.19	.530	13.46	.705	17.91	.896	22.76
.074	1.88	.168	4.27	.531	13.49	.715	18.16	.898	22.81
.076	1.93	.198	5.03	.535	13.59	.721	18.31	.901	22.89
.084	2.13	.204	5.18	.536	13.61	.730	18.54	.902	22.91
.089	2.26	.225	5.72	.540	13.72	.743	18.87	.908	23.06
.090	2.29	.235	5.97	.555	14.10	.750	19.05	.917	23.29
.093	2.36	.259	6.58	.558	14.17	.760	19.30	.931	23.65

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.935	23.75	1.099	27.91	1.251	31.78	1.386	35.20	1.630	41.40
.9357	23.77	1.105	28.07	1.252	31.80	1.396	35.46	1.635	41.53
.942	23.93	1.109	28.17	1.256	31.90	1.437	36.50	1.636	41.55
.947	24.05	1.110	28.19	1.257	31.93	1.464	37.19	1.646	41.81
.965	24.51	1.125	28.58	1.260	32.00	1.465	37.21	1.699	43.15
.971	24.66	1.126	28.60	1.286	32.66	1.470	37.34	1.756	44.60
.974	24.74	1.127	28.63	1.296	32.92	1.479	37.57	1.771	44.98
.980	24.89	1.131	28.73	1.305	33.15	1.493	37.92	1.860	47.24
.984	24.99	1.132	28.75	1.312	33.32	1.500	38.10	1.949	49.50
.985	25.02	1.135	28.82	1.339	34.01	1.501	38.13	1.959	49.76
1.000	25.40	1.182	30.02	1.340	34.03	1.506	38.25	2.068	52.53
1.002	25.45	1.187	30.15	1.345	34.16	1.510	38.35	2.074	52.68
1.010	25.65	1.192	30.28	1.354	34.39	1.511	38.38	2.084	52.93
1.020	25.91	1.214	30.84	1.375	34.93	1.521	38.63	2.160	54.86
1.025	26.04	1.215	30.86	1.376	34.95	1.562	39.67		
1.055	26.80	1.220	30.99	1.377	34.98	1.574	39.98		
1.062	26.97	1.229	31.22	1.380	35.05	1.589	40.36		
1.068	27.13	1.235	31.37	1.381	35.08	1.595	40.51		
1.090	27.69	1.243	31.57	1.382	35.10	1.604	40.74		
1.096	27.84	1.250	31.75	1.385	35.18	1.625	41.28		

(D) NOTES:

1. Metric equivalents are given for general information.
2. Dimensions are inches. Dimensions apply after plating.
3. Unless otherwise specified, tolerances are .005 (0.13 mm) for three place decimals and .01 (0.25 mm) for two place decimals. Angles ±1º.
4. Notes 5 through 11 applicable to contact only.
5. Dimensions apply after plating.
6. 63 all over in accordance with ANSI B46. 1-62 unless otherwise specified.
7. Remove all burrs and sharp edges .003 to .005 R.
8. Diameters to be concentric within .004 TIR.
9. Diameter in the same cross-sectional plane to be concentric with each other within .003 TIR.
10. The centerline of indicated projection must be located on vertical centerline within 2 degrees.
11. Contact finish: Gold plate .000050 inch min. In accordance with MIL-G-45204. A suitable underplating shall be used. Silver shall not be used. Finish is applied after sealing.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.


This connector mates with MIL-C-83723/75 and /77.

(D) For insert arrangements, see MIL-STD-1554 and table I.

TABLE I. Insert arrangements requiring reduced diameters for raised seal barriers on contact cavities as indicated.

Shell size	Insert arrangement	Contact cavities
8	(D) 03	1, 2, and 3
10	(D) 06	1, 2, 3, 4, 5, 6

(D) Part or Identifying number (PIN) example:

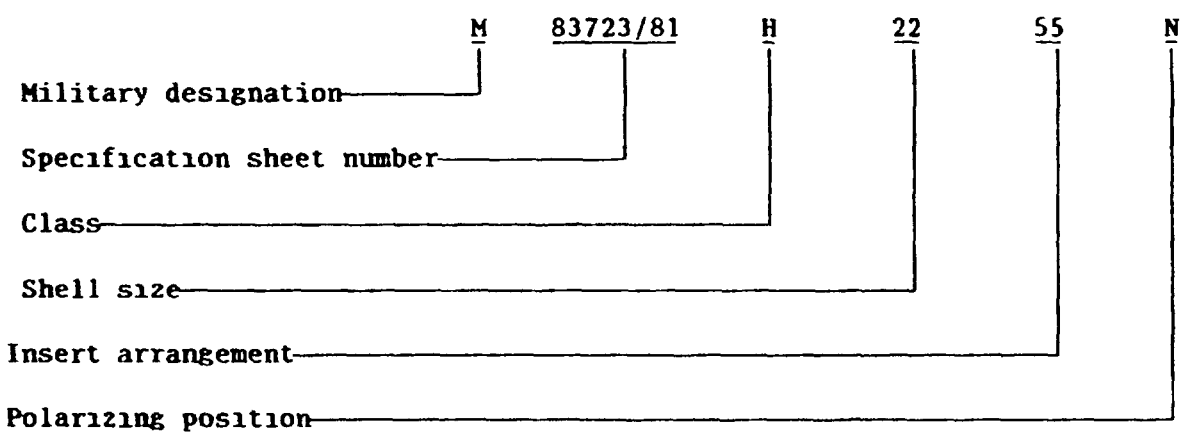

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, AV, MI
Navy - EC
Air Force - 11, 15, 99
DLA - ES

Preparing activity
Air Force - 85

Agent:
DLA - ES

Project 5935-3728-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.