INCH-POUND

MIL-C-83723/82D

30 June 1992

SUPERSEDING
MIL-C-83723/82C
6 July 1983

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE, (FLANGE MOUNT, THREADED COUPLING, CRIMP SOCKET CONTACT), (SERIES III, CLASSES A, G, K, N, R, S, AND W)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

(D) The complete requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-83723.

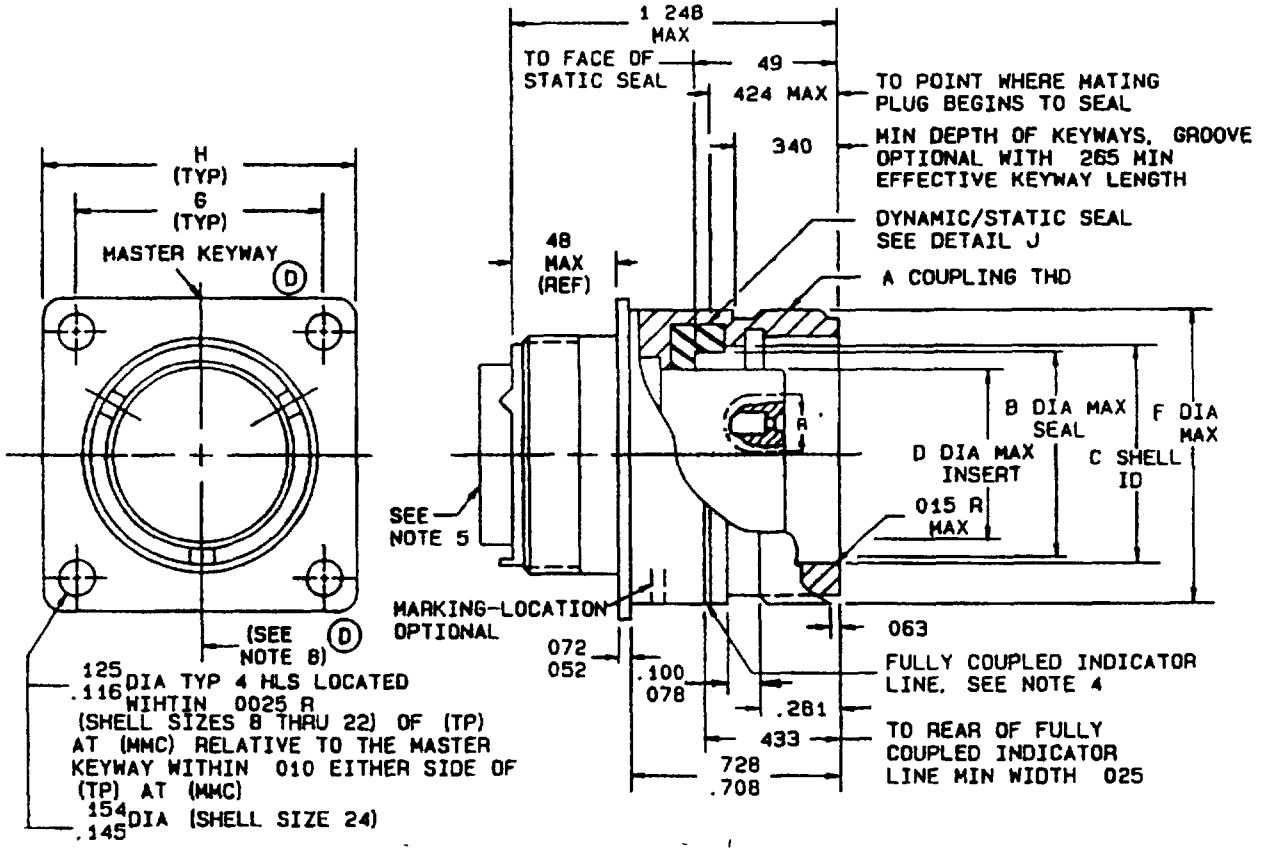
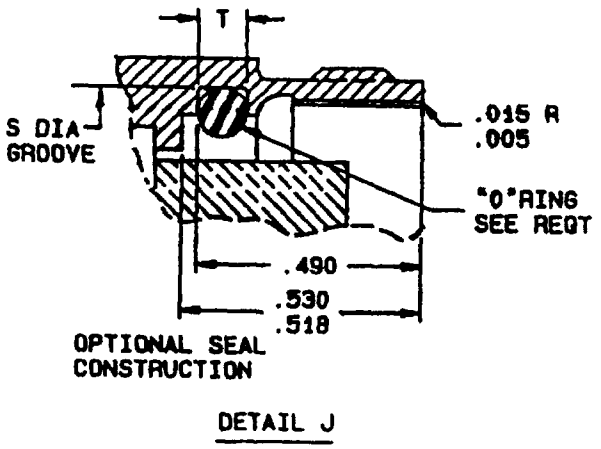


FIGURE 1. Classes A, G, K, R, and W.

(D) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.



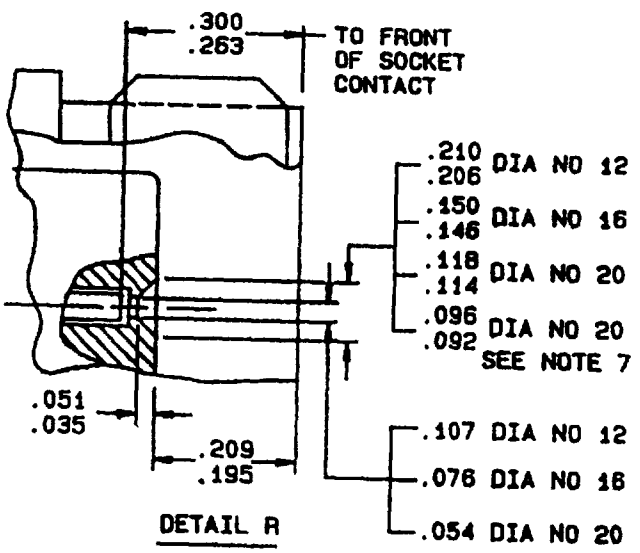


FIGURE 1. Classes A, G, K, R, and W - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.


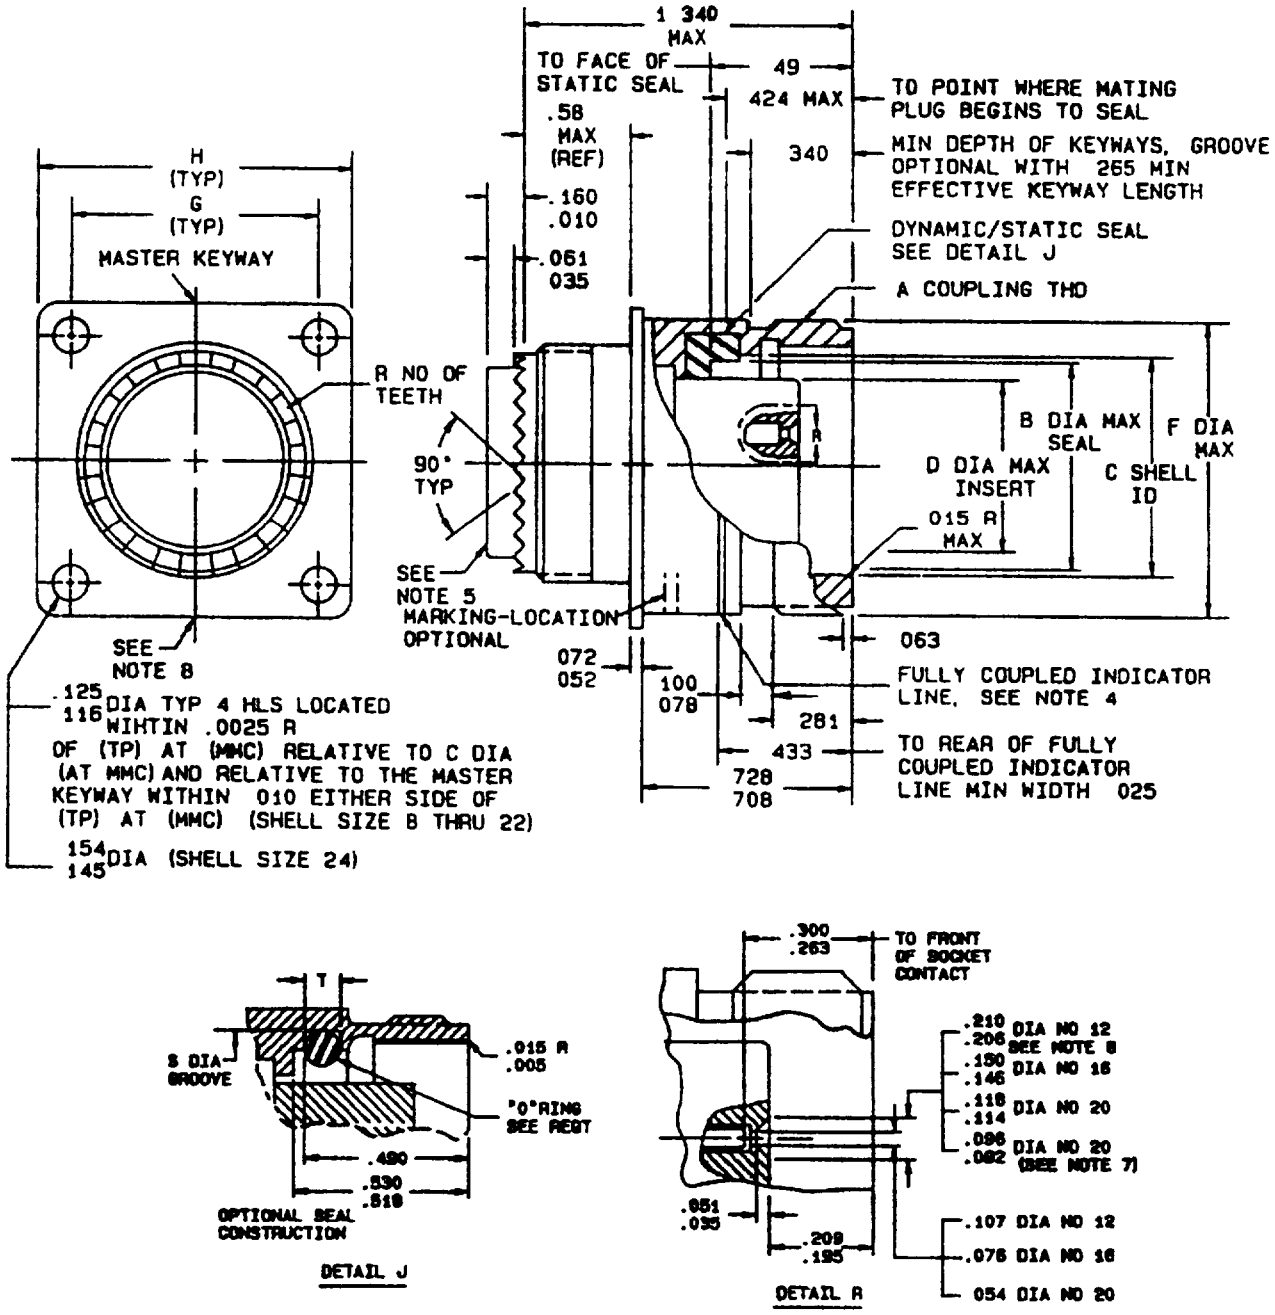


FIGURE 2. Classes N and S.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

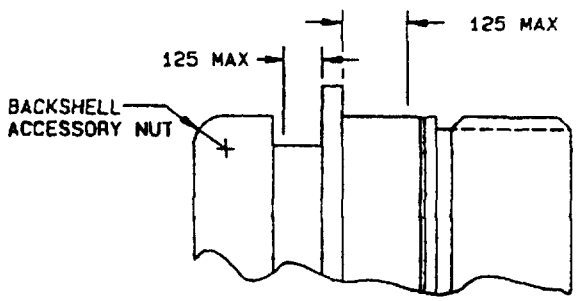

116 MIN CLEARANCE BETWEEN .125 PANEL AND COUPLING RING WITH MOUNTING FLANGE IS IN BACK OF THE PANEL

Connector dimensions.

Shell size	A thread	B	C	D	F	G	H	R
8	.562-24 UNEF-2A	.394	.418 .413	.290	.562	.594	.812	12
10	.688-24 UNEF-2A	.515	.535 .530	.388	.696	.719	.937	15
12	.875-20 UNEF-2A	.685	.705 .700	.558	.875	.812	1.031	21
14	.938-20 UNEF-2A	.754	.774 .769	.627	.936	.906	1.125	24
16	1.062-18 UNEF-2A	.881	.901 .896	.772	1.062	.969	1.250	30
18	1.188-18 UNEF-2A	.987	1.007 1.002	.860	1.187	1.062	1.343	33
20	1.312-18 UNEF-2A	1.112	1.132 1.127	.985	1.312	1.156	1.437	36
22	1.438-18 UNEF-2A	1.237	1.257 1.252	1.110	1.437	1.250	1.562	39
24	1.562-18 UNEF-2A	1.362	1.382 1.377	1.235	1.562	1.375	1.703	42

FIGURE 3. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

Connector dimension - Continued.

Shell size	S +.005 -.000	T
8	.490	.076 .071
10	.636	.089 .084
12	.806	.089 .084
14	.875	.089 .084
16	1.002	.089 .084
18	1.108	.089 .084
20	1.233	.089 .084
22	1.358	.089 .084
24	1.483	.089 .084

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.0025	0.063	.084	2.13	.195	4.95	.433	11.00	.700	17.78
.005	0.08	.089	2.26	.206	5.22	.480	12.19	.705	17.91
.010	0.25	.092	2.34	.209	5.31	.490	12.45	.708	17.98
.015	0.38	.096	2.44	.210	5.33	.515	13.08	.719	18.26
.025	0.64	.100	2.54	.263	6.68	.518	13.16	.728	18.49
.035	0.89	.107	2.72	.265	6.73	.519	13.18	.754	19.15
.051	1.30	.114	2.90	.281	7.14	.530	13.46	.769	19.53
.052	1.32	.116	2.95	.290	7.37	.535	13.59	.772	19.61
.054	1.37	.118	3.00	.300	7.62	.558	14.17	.774	19.66
.061	1.55	.125	3.18	.340	8.64	.562	14.27	.806	20.47
.063	1.60	.145	3.68	.388	9.86	.580	14.70	.812	20.62
.071	1.80	.146	3.71	.394	10.01	.594	15.09	.860	21.84
.072	1.83	.150	3.81	.413	10.49	.627	15.93	.875	22.22
.076	1.93	.154	3.91	.418	10.62	.685	17.40	.881	22.37
.078	1.98	.160	4.06	.424	10.77	.696	17.68	.896	22.76

FIGURE 3. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.901	22.89	1.007	25.58	1.132	28.75	1.252	31.80	1.375	34.92
.906	23.01	1.031	26.19	1.156	29.63	1.257	31.93	1.377	34.98
.936	23.77	1.062	26.97	1.187	30.15	1.312	33.32	1.382	35.10
.937	23.80	1.108	28.14	1.233	31.32	1.320	33.53	1.437	36.50
.969	24.61	1.110	28.19	1.235	31.37	1.340	34.04	1.483	37.67
.985	25.02	1.112	28.24	1.237	31.42	1.343	34.11	1.562	39.67
.987	25.07	1.125	28.58	1.240	31.50	1.358	34.49	1.703	43.26
1.002	25.58	1.127	28.63	1.250	31.75	1.362	34.59		

NOTES:
1. Dimensions are inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are .005 (0.13 mm) for three place decimals and .01 (0.25 mm) for two place decimals. Angles ±1º.
(D) 4. Coupling indicator line shall be color coded red.
5. Rear accessory interchangeability dimensions shall be in accordance with MIL-C-83723.
6. Shell size 8 will not mate with MIL-C-26500 connectors.
7. See table I for contact cavities requiring this dimension.
(D) 8. The centerline of indicated projection must be located on vertical centerline within 2º.

FIGURE 3. Dimensions and configurations - Continued.

REQUIREMENTS:

Dimensions and configuration: See figures 1 and 3 for classes A, G, K, R, and W. See figures 2 and 3 for classes N and S.

This connector mates with MIL-C-83723/87, 92, 96, and 98.

Insert arrangements and polarizing positions: See MIL-STD-1554 and table I.

(D) TABLE I. Insert arrangements requiring reduced diameters for lead-in chamfer on outer row of contact cavities as indicated.


Shell size	Insert arrangements	Contact cavities
8	(D) 03	1, 2, and 3
10	(D) 06	1, 2, 3, 4, 5, 6

"O" ring: See MIL-C-83723.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

D

Part or Identifying Number (PIN) example:

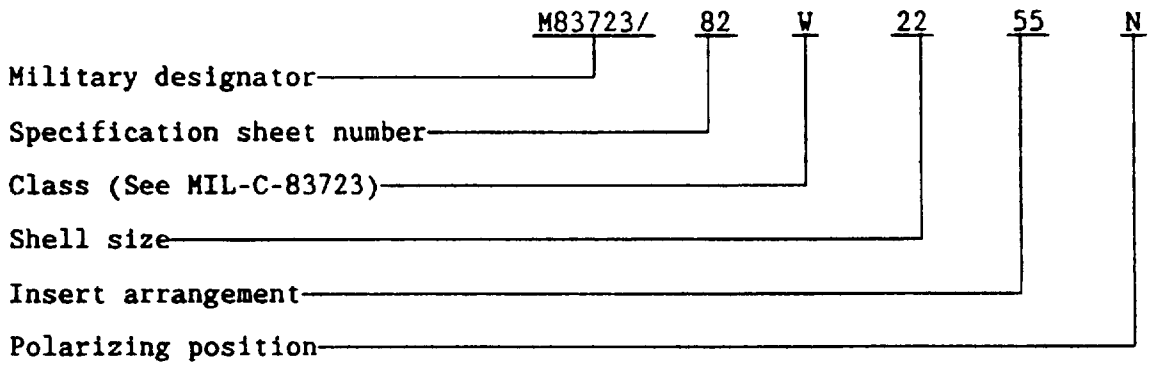

CONCLUDED MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC
Air Force - 11, 15, 17, 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3728-15)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.