INCH-POUND

MIL-I-82929(OS)
18 August 1994

MILITARY SPECIFICATION

INITIATOR, EXPLOSIVE ACTUATED, JAU-24/A

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. Scope.

1.1 **Scope.** This specification covers the requirements for the manufacture and acceptance of the JAU-24/A Explosive Actuated Initiator, referred to herein as "initiator".

2. Applicable Documents.

2.1 **Government documents.**

2.1.1 **Specifications and standards.** The following specifications and standards form part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (6.2).

SPECIFICATIONS

FEDERAL

PPP-B-601	Boxes, Wood, Cleated-Plywood
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Indian Head Division, Naval Surface Warfare Center, Standardization Branch (Code 8420), 101 Strauss Avenue, Indian Head, MD 20640-5035, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by sending a letter.

AMSC N/A

FSC 1377

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

5.1.1 Level A preservation, packing (see 5.4.2), and marking shall be in accordance with

MILITARY

MIL-C-5501/1	Caps and Plugs, Protective, Dust and Moisture Seal
MIL-C-5604	Compass; Magnetic, Pilot's Standby
MIL-C-10464	Cans, Hermetic, Sealing, Metal, Light Gage, Tear Strip Type
MIL-P-20444	Primer, Percussion, M42 Parts for and Loading, Assembling and Packing
MIL-D-21625	Design and Evaluation of Cartridges for Cartridge Actuated Devices

STANDARDS

MILITARY

MIL-STD-129	Marking for Shipment and Storage- Ammunition and Explosives
MIL-STD-453	Inspection, Radiographic
MIL-STD-810	Environmental Test Methods and Engineering Guidelines
MIL-STD-1168	Ammunition Lot Numbering

(Unless otherwise indicated, copies of Federal and Military specifications and standards are available from: Standardization Documents Order desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 **Other Government documents, drawings, and publications.** The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation (see 6.2).

SPECIFICATIONS

Naval Sea Systems Command (CAGE Code 53711)

WS 21535	Ignition Device, (Percussion), PVU-1/A

(Application for copies should be addressed to the Commanding Officer, Naval Surface Warfare Center, Attn: Code 802, Louisville, KY 40214-5001.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

DRAWINGS

Naval Air Systems Command (CAGE Code 30003)

DL 850AS133	Initiator, Explosive Actuated, JAU-24/A
850AS821	Test Fixture Initiators, Explosive Actuated, JAU-23/A and JAU-24/A
850AS825	Vibration Fixture, Initiators, Explosive Actuated, JAU-23/A and JAU-24/A
851AS110	Ignition Device (Percussion), PVU-1/A

PUBLICATIONS

NAVSUPINST 4030.28	Logistics, Packaging of Material

(Application for copies should be addressed to the Commanding Officer, Naval Aviation Supply Office, Cog I Support Branch (Code 03441), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

CODE OF FEDERAL REGULATIONS (CFR)

49 CFR 100-199	Transportation

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

2.2 **Non-Government publications.** The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM E 545	Standard Method for Determining Image Quality in Direct Thermal Neutron Radiographic Examination

(Application for copies of ASTMs should be addressed to the American Society for Testing and Materials, 1916 Race street, Philadelphia, PA 19103-1187.)

(Non-Government standards and other publications are normally available from organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:42Z
Check the source to verify that this is the current version before use.

2.3 **Order of precedence.** In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 **First article.** When specified in the contract or purchase order (see 6.2), a sample shall be subjected to the first article inspection (see 4.4 and 6.3).

3.2 **Primary components.** Only one lot of primary components shall be used in each lot of initiators, although, a primary component lot may be used in more than one initiator lot. The initiator lot shall contain only one delay cartridge assembly lot manufactured within 12 months of completed initiator lot assemblies.

3.2.1. **SCOT P/N 6078100.** The primary components for the initiator, SCOT P/N 6078100, are the PVU-1/A ignition device, the ignition powder, the delay mix, the propellant charge, the lead azide and the hexanitrostilbene (HNS) contained in the initiator cartridge P/N 6078150.

3.2.1.1 **PVU-1/A ignition device.** The PVU-1/A ignition device used in the initiator, SCOT P/N 6078100, shall be furnished from lots manufactured within the past 24 months or have been recertified within the past 12 months. The ignition device shall be manufactured in accordance with Drawing 851AS110 and shall be from lots which are accepted in accordance with product specification WS 21535. The PVU-1/A ignition device shall be free of the following defects when examined by x-ray: missing or abnormally thin charge; charge broken, cracked or porous, cracked or off-center anvil or other misplaced or deformed inert parts; anvil abnormally close to cup dome; and any other observable defects in assembly.

3.2.2 **Teledyne P/N 818307-105.** The primary components for the initiator TELEDYNE P/N 818307-105 are the M42C2-793 percussion primer, the explosive mix, the delay fuse, the delay mix and the booster charge.

3.2.2.1 **M42C2-793 percussion primer.** The M42C2-793 percussion primer used in the TELEDYNE P/N 818307-105, shall be manufactured and tested in accordance with MIL-P-20444. The primers shall be loaded into the initiators within 24 months of new primer acceptance testing or 12 months of primer recertification testing.

3.3 **Initiator production.** The initiators shall be manufactured in accordance with DL 850AS133 and the documents listed thereon. Each production delay cartridge assembly and initiator shall meet the requirements of 3.3.1 through 3.3.1.3 and 3.3.2 through 3.3.2.3, respectively. Failure of any delay cartridge or initiator to meet the applicable requirements of 3.3 shall result in rejection of that unit.

3.3.1 **Delay cartridge assembly (SCOT P/N 6078150 or Teledyne P/N 818570-5) inspection.**

3.3.1.1 **Visual inspection.** All delay cartridge assemblies manufactured under contract shall be visually inspected and screened for defects as outlined in 4.3.1.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

3.3.1.2 **Leakage.** Delay cartridge assemblies shall not exhibit a leak rate in excess of 1 X 10^{-5} standard cubic centimeters per second of air when tested in accordance with 4.3.2.

3.3.1.3 **Radiographic inspection.** The delay cartridge assemblies shall show proper assembly, presence of parts, sealing, presence of delay and explosive mixes, non-metal parts, and the proper assembly of pyrotechnic/non-metallic materials when examined radiographically in accordance with 4.3.3.1.

3.3.2 **Initiator inspection.**

3.3.2.1 **Visual inspection.** All initiators manufactured under contract shall be visually inspected and screened for defects as outlined in 4.3.1.1.

3.3.2.2 **Radiographic inspection.** Initiators shall show proper assembly, presence of parts, sealing, and presence of delay cartridge assembly when examined radiographically in accordance with 4.3.3.2.

3.3.2.3 **Demagnetization.** Initiators shall not deflect an approved Pilot's standby compass more than three degrees in either direction when passed in front of the compass. The initiators shall be tested in accordance with 4.3.4.

3.4 **Initiator performance.** Initiators shall be capable of meeting all requirements of 3.4.1 through 3.4.4.

3.4.1 **Vibration.** There shall be no evidence of deformation or derangement of components. The initiator shall not autoignite, shall be safe to handle, and shall meet the requirements of 3.3.2.2 and 3.4.4 following vibration testing of 4.3.5.

3.4.2 **Temperature and humidity (T & H) cycling.** The initiators shall meet the requirments of 3.3.2.2 and 3.4.4 after being exposed to the T & H cycle in accordance with 4.3.6.

3.4.3 **Shock.** The initiators shall meet the requirements of 3.3.2.2 and 3.4.4 following shock testing of 4.3.7.

3.4.4 **Ballistic requirements.** Initiator(s) shall meet the requirements of 3.4.4.1 through 3.4.4.3 when tested in accordance with 4.3.8.

3.4.4.1 **Ignition delay.** The upper (U) and lower (L) limits for ignition delay shall be U= 351 milliseconds and L= 249 milliseconds when evaluated in accordance with 4.3.8.1.

3.4.4.2 **High order detonation.** The minimum plate dent for high order detonation of the output SMDC test tip on the aluminum witness plate shall be 0.001 inch when evaluated in accordance with 4.3.8.2.

3.4.4.3 **Misfire.** There shall be no misfires.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:42Z
Check the source to verify that this is the currentversion before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 **Responsibility for inspection.** Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements (see 6.2).

4.1.1 **Responsibility for compliance.** All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements; however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.2 **Classification of inspections.** The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2.1)
b. Production inspection (see 4.2.2)
c. Lot acceptance inspection (see 4.2.3)

4.2.1 **First article inspection.** Before entering into quantity production, an acceptable first article sample of 38 initiators shall be prepared using the same procedures and methods proposed for the production lot. A first article sample acceptable for functional and environmental testing shall be defined as a sample which has met the applicable requirements of 3.2 through 3.3 of this specification. Thirty-six of these initiators shall be expended in the tests listed in table I and two shall be retained for investigative purposes. The contractor shall deliver the initiators to the activity designated by the contracting agency for tests. Any damage inflicted by the environmental treatments, which would adversely affect the performance of the item in service application shall cause rejection of the first article sample. Any further production prior to notification by the contracting agency of first article sample acceptability shall be at the contractor's risk. Failure of any initiator to comply with the requirements of section 3 shall be cause for rejection of the first article represented.

4.2.2 **Production inspection.** All production delay cartridge assemblies and initiators manufactured under contract shall be inspected and screened to requirements specified in 3.2 through 3.3. Any unit failing to meet the requirements listed in 3.2 through 3.3 shall be rejected and removed from the lot.

4.2.3 **Lot acceptance inspection.** Lot acceptance inspection shall consist of the examinations and tests specified in table II. Failure of any sample initiator to comply with the requirements listed in table II shall be cause for rejection of the lot represented.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

TABLE I. First article test plan.

Test Sequence	Test Paragraph	Sample Group				
		I	II	III	IV	V
Visual	4.3.1	6	12	6	12	2
Radiographic	4.3.3	6	12	6	12	2
Vibration	4.3.5	6				
T & H Cycling	4.3.6		12			
Shock	4.3.7			6		
Radiographic	4.3.3	6	12	6		
Ballistic test −65 ± 5°F 70 ± 5°F 200 ± 5°F	4.3.8	 2 2 2	 4 4 4	 2 2 2	 4 4 4	

TABLE II. Lot acceptance inspections and tests.

Inspection/Test	Test Paragraph	Quantity
Visual	4.3.1	Test and retain sample
Radiographic	4.3.3.2	Test and retain sample
Ballistic test −65 ± 5°F 70 ± 5°F 200 ± 5°F	4.3.8	 1/3 test sample 1/3 test sample 1/3 test sample

4.2.3.1 **Sample size.** A random sample from each production lot, including the retained sample for investigative purposes, shall be selected in accordance with table III for lot acceptance inspection. Test sample initiators and initiators retained for investigative purposes shall not be applied as part of the quantity specified for delivery by the contract or purchase order.

TABLE III. Lot acceptance sampling.

Lot Size	Test Sample Size	Retained Sample Size
Up to 50	12	2
51 to 200	18	3
201 to 500	24	4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

4.3 **Inspections and tests.**

4.3.1 **Visual inspections.**

4.3.1.1 **Initiator and delay cartridge assembly visual inspection.** Each delay cartridge assembly and all assembled initiators shall be visually examined. Reject those with inadequate or illegible descriptive markings or serial numbers, dents, deep scratches, or other defects which may prevent proper installation or function.

4.3.1.2 **Packaging inspection.** The condition of the packaging (inner containers), packing (outer container), and markings shall be determined by comparison to the requirements of section 5.

4.3.2 **Delay cartridge assembly leak test.** Each delay cartridge assembly produced under contract shall be leak tested in a dry gas leak tester to determine conformance with 3.3.1.2. Units which exhibit a leak rate in excess of 1×10^{-5} standard cc/sec of air at a pressure differential of 1.0 ± 0.1 atmosphere shall be rejected.

4.3.3. **Radiographic examination.**

4.3.3.1 **Delay cartridge assembly examination.** Radiographic examination of delay cartridge assemblies shall include x-ray in accordance with MIL-STD-453 and n-ray in accordance with ASTM E 545. All delay cartridge assemblies shall be identified with serial numbers beginning with 001 prior to examination. The delay cartridge assemblies shall be arranged on trays or boards in consecutive numerical order with any missing serial numbers identified on the radiographic plate. The delay cartridge assemblies shall be positioned for the most revealing exposure with the long axis perpendicular to the radiographic beam. Each radiograph shall carry a permanent identification of the items displayed thereon in a 4 x 6 inch region maximum. The radiographic identification shall include the drawing number, the complete lot number, the contract number, the DODIC, and the span of serial numbers displayed. Radiographs of the entire production lot shall accompany the ballistic sample to the activity conducting the tests (see 6.2). Any observable imperfections as outlined in 3.3.1.3 shall be cause for rejection of the delay cartridge assemblies. Defective delay cartridge assemblies found during radiographic review are to be marked on the radiographic plate and removed from the production lot.

4.3.3.2 **Initiator examination.** Radiographic examination of initiators shall include x-ray in accordance with MIL-STD-453. All initiators shall be identified with serial numbers beginning with 001 prior to examination. The initiators shall be arranged on trays or boards in consecutive numerical order with any missing serial numbers identified on the radiographic plate. The initiators shall be positioned for the most revealing exposure with the long axis perpendicular to the radiographic beam. Each radiograph shall carry a permanent identification of the items displayed thereon in a 4 x 6 inch region maximum. The radiographic identification shall include the drawing number, the complete lot number in accordance with MIL-STD-1168, the contract number, the DODIC, and the span of serial numbers displayed. Radiographs of the entire production lot shall accompany the ballistic sample to the activity conducting the tests (see 6.2). In addition, a marriage log indicating which delay cartridge serial number is installed in which initiator serial number shall be provided with radiographs. Any observable imperfections as outlined in 3.3.2.2 shall be cause for rejection of the delay cartridge assemblies. Defective delay cartridge assemblies found during radiographic review are to be marked on the radiographic plate and removed from the production lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

4.3.4 **Demagnetization.** Each initiator shall be moved past a pilot's standby compass face (in accordance with MIL-C-5604) by placing the initiator six inches from the compass set in an east-west heading. The initiator and the compass shall be placed at the same height from the floor. The initiators shall be moved past the compass face in a longitudinal direction for its entire length, rotated 90 degrees in the horizontal position about it's longitudinal axis, and moved back past the compass face. This procedure shall be repeated for each 90 degrees rotation of the initiator. The initiator shall be acceptable if the requirements of 3.3.2.3 are met.

4.3.5 **Vibration test.**

4.3.5.1 **Non-gunfire vibration.** The test shall be conducted in accordance with MIL-STD-810B, Table 514.1-I Curve "AT" except that for each cycling period the time shall be divided equally for vibration at −65, 70 and 200°F. The initiators shall be mounted in the vibration test fixture Drawing 850AS825 for the JAU-24/A initiator. The non-gunfire vibration test shall be performed on all six initiators. The six initiators shall be mounted on the test fixture at the same time and one shall be monitored for response during the test.

4.3.5.2 **Gunfire vibration.** The gunfire vibration test shall be performed on all six initiators, on each of the three orthogonal axes, and shall be conducted at 70°F test temperature only. The six initiators shall be mounted on the test fixture at the same time and one shall be monitored for response during the test.

4.3.5.2.1 **Resonance search.** A resonance survey shall be conducted on each of the six initiators at 70°F in each of the three orthogonal axes. The frequency sweep shall be made from 50 Hz to 500 Hz and back to 50 Hz in approximately 7.50 minutes to the vibration test levels shown in table IV. The resonance points shall be noted. A resonance point is defined as a frequency which has a transmissibility (output/input) of two or greater. If more than three resonant points are noted from the resonance survey, only the three more severe will be used for resonance dwell vibration.

TABLE IV. Vibration test levels.

Frequency (Hz)	Acceleration or Amplitude
50 to 54	0.036 inch D.A.
55 to 210	± 5 G's
211 to 300	0.00222 inch D.A.
301 to 500	± 10 G's

4.3.5.2.2 **Resonance dwell.** The six initiators shall be vibrated in each of thee orthogonal axes at 70°F for 7.50 minutes at each resonant point (to a maximum of three) obtained during the resonance survey in 4.3.5.2.1 herein. The gunfire vibration test levels are shown in table IV depending upon the number of resonance frequencies determined in the resonance survey per 4.3.5.2. The remainder of the sweep time in accordance with table V shall be used for vibration cycling per 4.3.5.2.3 herein.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:42Z
Check the source to verify that this is the currentversion before use.

TABLE V. Gunfire sinusoidal vibration test schedule.

Fixed Dwell (fd) at the following center frequencies	Number of Resonances			
	0	1	2	3
	Sweep Time			
	30	22.5	15.0	7.50
	Resonance Dwell Time			
	–	7.5	15.0	22.50
67 Hz	7.50	7.50	7.50	7.50
100 Hz	7.50	7.50	7.50	7.50
135 Hz	7.50	7.50	7.50	7.50
200 Hz	15.00	15.00	15.00	15.00
267 Hz	7.50	7.50	7.50	7.50
300 Hz	7.50	7.50	7.50	7.50
335 Hz	7.50	7.50	7.50	7.50
400 Hz	15.00	15.00	15.00	15.00
467 Hz	7.50	7.50	7.50	7.50
500 Hz	7.50	7.50	7.50	7.50
Total Time Each Axis	120.0	120.0	120.0	120.0

Note: When an equipment resonance occurs within 5% of a fixed dwell frequency, the fixed dwell period shall be omitted and only the resonance dwell performed. The omitted fixed dwell time shall then be added to the sweep time.

4.3.5.2.3 **Vibration cycling.** All six initiators shall be subjected to sinusoidal vibration cycling at 70°F for a period of time as specified in 4.3.5.2.2 on each of the three orthogonal axes with the frequency varying logarithmically from 50 Hz to 500 Hz and back to 50 Hz in approximately 7.50 minutes. The gunfire vibration test levels shall be shown in table IV.

4.3.5.2.4 **Fixed dwell.** After sinusoidal vibration cycling, the six initiators shall be subjected to a series of fixed dwells as shown in table V. The fixed narrow band dwells shall be performed by sweeping the frequency of ± 5 percent of the specified center frequency (e.g., the 100 Hz dwell should be performed from 95 to 105 Hz at the logarithmic sweep rate specified in 4.3.5.2.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

4.3.5.2.5 **Sinusoidal sweep.** After completion of the fixed dwell testing, the six initiators shall be subjected to seven (7) sinusoidal vibration sweeps in each of the three orthogonal axes. The frequency shall vary logarithmically from 500 Hz to 2000 Hz and back to 500 Hz. The sweep cycling rate shall be as specified in 4.3.5.2.3 herein, with an applied input of ± 10 G's.

4.3.6 **Temperature and humidity cycling.** The temperature and humidity cycling test shall be conducted in accordance with MIL-D-21625F. Failure of any cartridge to comply with the requirements of 3.4.2 shall be cause for rejection of the lot or first article.

4.3.7 **Shock test.** The shock test shall be conducted in accordance with MIL-D-21625F. Failure of any initiator to comply with the requirements of 3.4.3 shall be cause for rejection of the lot or first article.

4.3.8 **Ballistic test.** Sample initiators shall be conditioned for a period not less than 4 hours nor more than 24 hours at the specified temperatures. The initiators shall be removed from the conditioning chamber and test fired within 3 minutes. If any initiator is not fired within 3 minutes after removal, it shall be reconditioned at the specified temperature for an additional 4 hours and then tested. The initiators shall be fired in the test fixture, Drawing 850AS821, as shown in figure 1. Instrumentation shall be provided to measure and record the initiator ignition delay and the high order detonation of the output shielded mild detonating cord (SMDC) test tip on the aluminum witness plate. The initiators shall meet the requirements specified in 3.4.4.

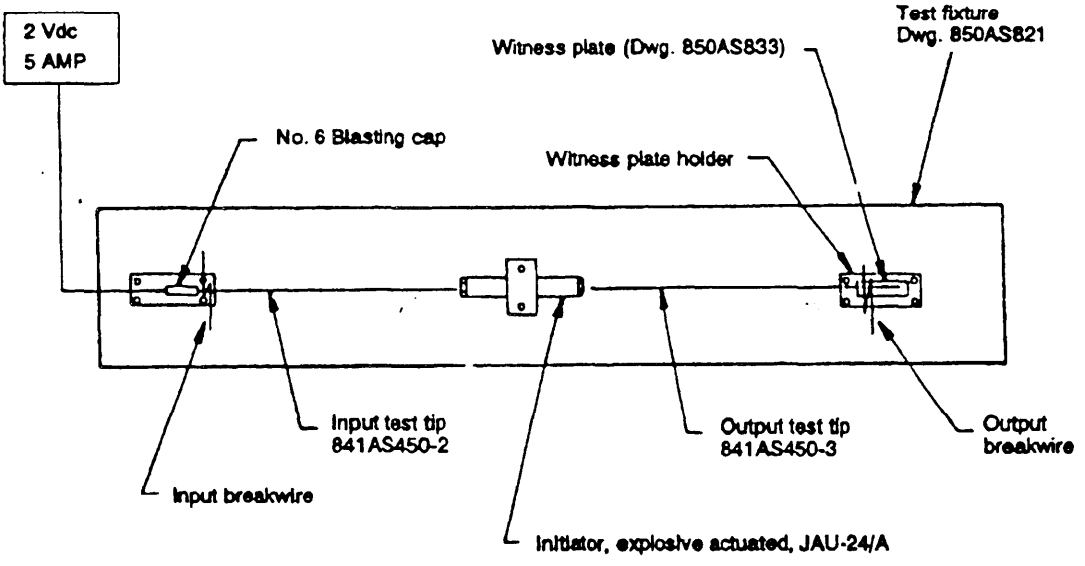


FIGURE 1. Test setup.

4.3.8.1 **Ignition delay.** The ignition delay shall be measured from the initiation of the inlet SMDC test tip to the detonation of the outlet SMDC test tip. Each initiator shall meet the requirements of 3.4.4.1.

4.3.8.2 **High order detonation.** High order detonation of the output SMDC test tip shall be demonstrated in a 6061-T6 Aluminum witness plate. Each initiator shall meet the requirements of 3.4.4.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

4.3.8.3 **Misfire.** An initiator that does not fire under the conditions specified in 4.3.8 shall be considered defective, and the lot shall be considered unacceptable, unless the misfire is clearly attributable to faulty test equipment or procedure. Each initiator shall meet the requirements of 3.4.4.3.

4.3.8.4 **Test failure.** If test failure is attributable to an assignable cause, excluding the test initiator, the original test results shall be discarded and that test reconducted.

5. PACKAGING

5.1 **Preservation, packaging, and packing.** Preservation, packaging, and packing shall be Level A and shall be in accordance with 49 CFR 100-199 and NAVSUPINST 4030.28. The contractor shall also comply with all applicable transportation regulations.

5.1.1 **Level A packaging.** Level A preservation and packing (see 6.4), as specified in 5.1.1.1 through 5.1.1.2 shall be used for packaging of all production lot for service use. Unless otherwise specified in the contract or purchase order (see 6.2), the number of inner containers per pack is optional.

5.1.1.1 **Inner container.** One (1) initiator shall be packed in a rigid hermetically sealed metal container which meets the requirements of MIL-C-10464, Type 1. Protective plugs in accordance with MIL-C-5501/1 shall be installed in the inlet and outlet ports on the initiator to afford protection. Adequate dunnage shall be placed in the can to provide a tight pack and the can hermetically sealed.

5.1.1.2 **Outer pack.** Initiators packaged in accordance with 5.1.1.1 shall be packaged in a nailed wood box conforming to PPP-B-621, Class 2, Style 4 or 4 1/2 or in a cleated plywood box conforming to PPP-B-601, Overseas Type, Style A or B. Adequate dunnage shall be provided to assure a tight pack.

5.2 **Marking.**

5.2.1 **Special marking.** Marking of outer containers shall be in accordance with Code of Federal Regulations 49 CFR 100-199.

5.2.2 **Normal marking.** Unless otherwise specified in the contract or purchase order (see 6.2), the marking on the inner, intermediate, and outer containers shall be as specified below. The specified markings shall be applied to the containers in accordance with the applicable provisions of MIL-STD-129.

a. Inner Container Marking

(1) NSN 1377-01-116-3148 and DODIC XW55
(2) Drawing 850AS133
(3) Initiator, Explosive Actuated, JAU-24/A
(4) Quantity
(5) Lot number in accordance with MIL-STD-1168

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

b. Outer pack Marking

(1) NSN 1377-01-116-3148 and DODIC XW55
(2) Drawing 850AS133
(3) Initiator, Explosive Actuated, JAU-24/A
(4) Quantity
(5) Gross weight and cube
(6) Lot number in accordance with MIL-STD-1168
(7) Contract/purchase order number
(8) WARNING: CARTRIDGES, POWER DEVICES
(9) DOT Explosive Class
(10) UN Number
(11) Proper UN name
(12) Performance oriented packaging identification

5.3 **Explanation of terms.** For the purpose of this specification NAVSUPINST 4030.28, 1-4, 2-2, and 2-3, and Appendix A, when applicable, shall be used to clarify packaging terms.

6. **NOTES**

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

6.1 **Intended use.** The initiator, explosive actuated provides a nominal 0.3 second delay in the inter seat sequencing system of the FA-18B/D/F, T-45A and TAV-8B aircraft.

6.2 **Acquisition requirements.** Acquisition documents must specify the following:

a. Title, number, and date of this specification.

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1 and 2.2).

c. Production test activity and lot size (see 4.1).

d. Whether first article inspection is required and, if so, specify the test activity (see 3.1 and 4.2.1).

e. Directions for shipping radiographs of entire production lot and marriage log (report indicating cartridge serial number to initiator serial number), along with the ballistic sample to the activity conducting the production lot acceptance tests (see 4.3.3.1 and 4.3.3.2).

f. Marking if other than as specified (see 5.2.2).

g. That the safety requirements of the "Contractor's Safety Manual for Ammunition, Explosives and Related Dangerous Material" (DOD 4145.26M) are applicable (see 6.3).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:42Z
Check the source to verify that this is the currentversion before use.

6.3 **Safety precautions.** The safety precaution requirements of the contractor's Safety Manual for Ammunition and Explosives" (DOD 4145.26M), are applicable and should be specified in the contract as required by the Federal Acquisition Regulation (FAR) 23.3.

6.4 **First article.** When a first article inspection is required, the contracting officer should provide specific guidance to offerors whether the items should be a first article sample or a sample selected from the first production items (see 3.1), and the number of items to be tested as specified in 4.2.1. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for examination, approval of first article test results, and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.5 **Definition.**

6.5.1 **Level A packaging.** The degree of preservation and packaging which will afford adequate protection against corrosion, deterioration, and physical damage during shipment, handling, indeterminate storage, and world-wide redistribution.

6.6 **Subject term (key word) index.**

Percussion
Powder
Primer
Propellant

Preparing Activity
Navy - OS
(Project 1377-NE71)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:42Z
Check the source to verify that this is the currentversion before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-I-82929(OS)	940818

3. DOCUMENT TITLE
INITIATOR, EXPLOSIVE ACTUATED, JAU-24/A

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
COMMANDER, INDIAN HEAD DIVISION VAL SURFACE WARFARE CENTER (CODE 8420)	(1) Commercial 301-743-4358/4510	(2) AUTOVON 354-4358/4510
c. ADDRESS (Include Zip Code) 101 STRAUSS AVE INDIAN HEAD, MD 20640-5035	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 Previous editions are obsolete. 19.290

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:42Z
Check the source to verify that this is the current version before use.