MIL-E-83304B(USAF)
28 January 1975
SUPERSEDING
MIL-E-83304A(USAF)
21 July 1972

MILITARY SPECIFICATION

EXTINGUISHER UNIT, FIRE, BROMOCHLORODIFLUOROMETHANE, FEU-4/S32P; 500-POUND CAPACITY, TRUCK MOUNTING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers a 500-pound capacity bromochlorodifluoromethane (Halon 1211) fire extinguisher unit suited for mounting in the body of a pickup truck and designated FEU-4/S32P.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Military

MIL-P-116	Preservation-Packaging, Methods of
MIL-B-26195	Box, Wood, Cleated, Skidded, Load Bearing Base
MIL-B-38741	Bromochlorodifluoromethane, Technical

STANDARDS

Federal

FED-STD-595	Colors

Military

MIL-STD-100	Engineering Drawing Practices
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of US Military Property
MIL-STD-143	Standards and Specifications, Order of Precedence for the Selection of
MIL-STD-808	Finishes, Protective, and Codes, for Finishing Schemes for Ground and Ground Support Equipment
MIL-STD-831	Test Reports, Preparation of
MIL-STD-889	Dissimilar Metals
MIL-STD-1186	Cushioning, Anchoring, Bracing, Blocking and Waterproofing; with Appropriate Test Methods

FSC 4210

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

Drawings

AVCO Corporation

6060006 Assembly, Skid Unit, No. 606 Fire Truck

The Ansul Company

26603 Halon Unit Assembly

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publication. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on the date of invitation for bids or request for proposal shall apply.

American Society of Mechanical Engineers

Boiler and Pressure Vessel Code
Section VIII Unfired Pressure Vessels

(Application for copies should be addressed to the American Society of Mechanical Engineers, United Engineering Center, 345 East 47th Street, New York, New York 10017.)

3. REQUIREMENTS

3.1 Preproduction. This specification makes provisions for preproduction testing.

3.2 General requirements and components. The requirements of Drawing 606006, as updated by Drawing 26603, apply as requirements of this specification with the exceptions and additions specified herein (see 6.2). The extinguisher unit shall consist of the following major components:

Item Name	See Requirements
Agent tank	3.7
Hose reel assembly	3.8.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:43Z
Check the source to verify that this is the current version before use.

3.3 Selection of standards and specifications. Standards and specifications for necessary commodities and services not specified herein shall be selected in accordance with MIL-STD-143.

3.4 Materials. Materials shall be as specified herein. Materials not specifically covered by this or applicable specifications shall be suitable in every respect and of good quality for this type of equipment. Wood shall not be used in construction.

3.4.1 Metals. Unless otherwise specified herein, parts and components of the extinguisher unit which come in contact with the bromochlorodifluoromethane agent specified herein shall be fabricated of copper, brass, or bronze.

3.4.1.1 Dissimilar metals. Unless protected against electrolytic corrosion, dissimilar metals shall not be used in intimate contact with each other. Dissimilar metals are defined in MIL-STD-889.

3.4.2 Elastomers. Elastomeric materials shall be compatible with the bromochlorodifluoromethane agent specified herein.

3.4.3 Fungusproof materials. Materials that are nonnutrient for fungi shall be used to the greatest possible extent. Where materials that are nutrients for fungi must be used, such materials shall be treated with a fungicidal agent acceptable to the procuring activity.

3.4.4 Protective treatment. When materials are used that are subject to deterioration when exposed to environmental conditions likely to occur during service usage, they shall be protected against such deterioration in a manner that will in no way prevent compliance with the performance requirements of this specification. Protective coatings that will chip, crack, or scale with age or extremes of climatic conditions shall not be used.

3.5 Design and construction. The extinguisher unit shall be so designed and constructed that parts will not work loose in service. It shall be inherently capable of withstanding the stresses, jars, vibrations, and other conditions incident to shipping, storage, and usage, and shall provide maximum ease and safety of operation.

3.5.1 Functional design. The extinguisher unit shall be designed to operate efficiently when installed in the bed of a pickup truck. It shall provide quick response for fire protection at flight line and other airfield facilities.

3.5.2 Reliability. The reliability of the extinguisher unit to satisfy its intended use will be demonstrated by successful completion of the tests specified herein.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:43Z
Check the source to verify that this is the current version before use.

3.5.3 Maintainability. The extinguisher unit shall be designed and constructed to provide:

a. A minimum number of parts consistent with performances required herein

b. Parts and components that are located or positioned for ease of inspection and recognition of excessive wear or potential failure

c. Ease of adjusting, servicing, and replacing parts and components

d. Use of readily available standard tools and equipments for maintenance

e. Maintenance with a minimum number of tools.

3.5.3.1 Fastening devices. All screws, pins, bolts, and similar parts shall be installed with adequate means for preventing loss of proper tightness and adjustment. When subject to removal, replacement, or adjustment, attaching hardware for any component shall be easily removable and shall not be swaged, peened, staked, nor otherwise permanently deformed.

3.6 Performance. Performance requirements of the extinguisher unit shall be based on operation at sea level.

3.6.1 Agent discharge. The extinguisher unit shall exhibit the following performance characteristics when discharging bromochlorodifluoromethane conforming to MIL-B-38741 at normal operating pressure through 100 feet of 1-inch handline with nozzle installed on the hose reel:

a. Discharge rate of between 5-to 5-1/2-pps (pounds per second)

b. Extinguish a JP-4 fuel fire from a distance of 20 feet without assist from downwind conditions

c. Effective discharge of not less than 95 percent of the agent capacity without pressure pulsations or interruptions to flow.

3.6.2 Roadability. The fully charged extinguisher unit shall not be damaged or lose pressure when installed in the body of a pickup truck and subjected to operation over improved and unimproved roads as follows:

a. Paved roads for a distance of 100 miles at an average speed of 45 mph

b. Graded gravel roads for a distance of 100 miles at an average speed of 25 mph.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

3.7 Agent tank. The tank shall be constructed in accordance with section VIII of the ASME Boiler and Pressure Vessel Code, except it shall withstand a hydrostatic pressure of not less than 400 psi and operate at pressures between 200- and 225-psi. The tank and accessory components shall not exhibit agent leakage rates exceeding the following:

a. Welded seams on the tank and soldered seams in the piping - 0.6 ounces per year each seam

b. Threaded connections - 5 ounces per year each connection

c. Valves and gages - 50 ounces per year each valve and gage.

3.7.1 Pressure system. The spring-loaded relief valve shall operate to relieve the internal tank pressure at 275 ±10 psi and shall close at a pressure not less than 190 psi. The relief valve shall incorporate features that will preclude tampering with the pressure relief setting. All hose assemblies shall have a burst pressure rating of not less than four times the maximum working pressure.

3.8 Hose reel assembly. The hose reel assembly shall withstand operating and test pressures specified under 3.7. The hose reel shall provide for ease in withdrawing and rewinding the handline. An adjustable friction device, to prevent overtravel during handline withdrawal operations, shall be located on the right-hand side as the operator is facing the reel.

3.8.1 Nozzle. The handline shall be equipped with a nozzle incorporating an on-off control that will provide for discharging bromochlorodifluoromethane in a visible conical pattern (with an eliptical cross section) at a discharge rate of between 5-to-5-1/2-pps over a horizontal discharge range of not less than 20 feet. The nozzle valve assembly shall incorporate a recess having a depth of 2.515 ±0.005 inches into which a bayonet applicator joint conforming to figure 1 can be inserted and secured for agent discharge through the applicator. A 360° swivel connection shall be provided between the nozzle and handline.

3.9 Part numbering of interchangeable parts. All parts having the same manufacturer's part number shall be functionally and dimensionally interchangeable. The item identification and part numbering requirements of MIL-STD-100 shall govern the manufacturer's part numbers and changes thereto.

3.10 Dimensions. The overall dimensions of the extinguisher unit shall be in accordance with the drawing.

3.11 Weight. The weight of the extinguisher unit including the mounted agent tank and hose reel assembly, when fully equipped and filled to capacity with agent, shall not exceed 1,200 pounds.

Source: https://assist.dla.mil -- Downloaded: 20261O-26T04:43Z
Check the source to verify that this is the currentversion before use.

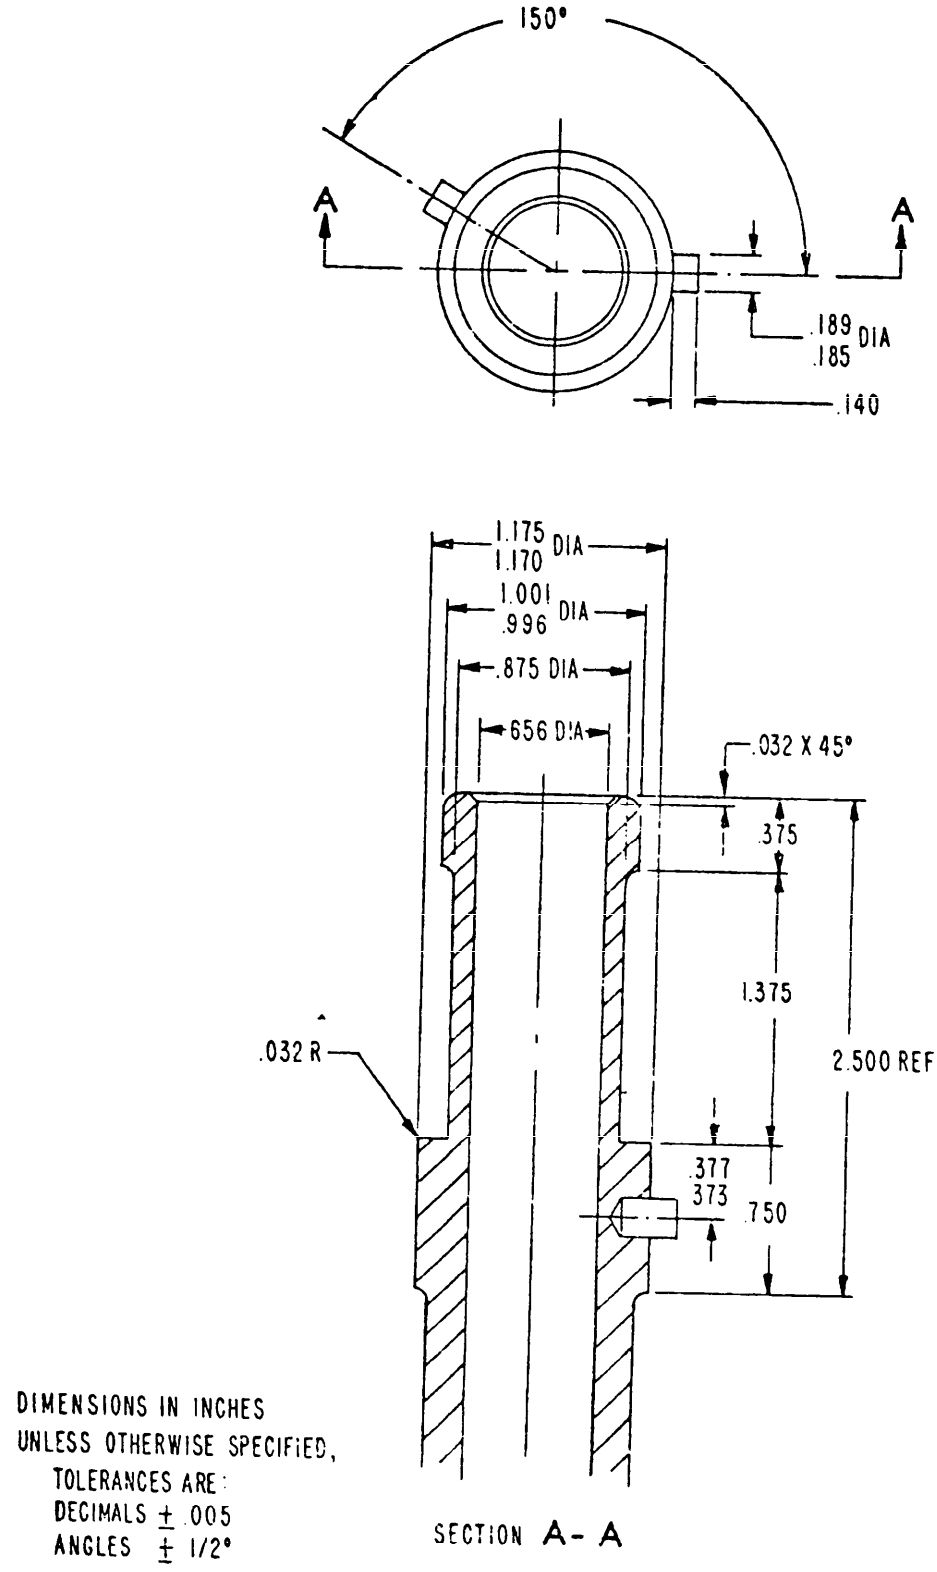


FIGURE 1. Bayonet Applicator Joint

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

3.12 Finishes and protective coatings. The extinguisher unit shall be cleaned, treated, and painted in accordance with MIL-STD-808. The exterior surfaces shall be painted gloss red, color 11136 of FED-STD-595. Copper, brass, and bronze fittings and tubing may be painted provided that such painting is in compliance with these Standards.

3.13 Markings

3.13.1 Identification of product. Equipment, assemblies, and parts shall be marked for identification in accordance with MIL-STD-130.

3.13.2 Data plates. Nameplates, identification of controls, and operating instructions shall be in accordance with the drawing.

3.14 Workmanship. The extinguisher unit, including all parts and accessories shall be fabricated and finished in a thoroughly workmanlike manner. Particular attention shall be given to freedom from blemishes, defects, burrs and sharp edges; marking of parts and assemblies; thoroughness of soldering, welding, brazing, riveting, and painting; alignment of parts; and tightness of assembly screws, bolts, et cetera.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of tests. The inspection and testing of the extinguisher unit shall be classified as follows:

a. Preproduction testing . . . . . See 4.4

b. Quality conformance tests . . . . . See 4.5.

4.3 Test conditions

4.3.1 Preparation for test. All extinguisher units submitted for test shall contain all specified components and shall be completely assembled and properly adjusted and serviced for immediate operation.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:43Z
Check the source to verify that this is the current version before use.

4.3.2 Test agent. Except for the hydrostatic pressure test, and the leakage test which shall be performed using dichlorodifluoromethane (CCl_2F_2), the test agent shall be bromochlorodifluoromethane conforming to MIL-B-38741.

4.3.3 Test data. During the tests specified herein, at least the following data, as applicable, shall be recorded at time intervals dictated by the test objective:

a. Time started

b. Time completed

c. Ambient temperature

d. Ambient atmospheric pressure

e. Ambient wind conditions

f. Quantity of agent in the agent tank

g. Pressure in the agent tank

h. Pressure in the nitrogen bottle.

4.5.4 Test observations. Throughout all tests specified herein, the extinguisher unit shall be closely observed for the following conditions which shall be considered cause for rejection:

a. Failure to conform to design and performance requirements specified herein

b. Spillage or leakage of agent

c. Undue loss of pressure in the agent tank and nitrogen bottle

d. Erratic agent discharge as determined by flow rate, interruptions to flow, discharge range and pattern

e. Misalignment of parts and components.

4.4 Preproduction testing (see 6.2)

4.4.1 Test sample. One extinguisher unit shall be subjected to the tests specified in 4.4.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

4.4.2 Test report. After completion of the preproduction tests, a test report shall be prepared in accordance with MIL-STD-831. The report shall cover each test required under a separate section or paragraph which in turn shall list individual test purposes or objectives; describe procedures followed in each individual test; and compare by means of a checklist and table (as applicable) test results with the respective performance or design requirement for which the test is intended to demonstrate compliance.

4.4.2.1 Reliability and maintainability information. The following information shall be included as an appendix to the test report:

a. All failures, servicing, adjustments, maintenance, and irregular functioning shall be identified by accumulated operating time, cycles, miles, or position in the test procedure, as appropriate. Test conditions at the time of the events identified shall be recorded

b. Test operator and maintenance technician actions, test equipment and test facility failures, and other events that might serve as grounds for a request that an equipment failure not be counted as a reliability failure. Detailed descriptions of the events and the analysis to substantiate any such requests shall be included and shall be clearly cross-referenced to each applicable failure

c. A summary of the engineering analysis and of any tests conducted to determine assignable causes for any failure or irregular functioning

d. A summary of the engineering analysis leading to any corrections made to design, construction, quality control, or other procedures, or leading to any corrections to be made or proposed to be made to production items. The summary shall also include in analysis of the predicted effectiveness of such corrections. Failures that have been corrected by design changes or by other means shall be counted as reliability failures until the corrections have been both analyzed and verified by test sufficiently to substantiate the effectiveness of the correction to the satisfaction of the procuring activity

e. Clock time and man-hours required for each maintenance and servicing action taken during the tests. Only the time needed for actually preparing for and performing the tasks shall be measured and recorded. A brief description of the experience and qualifications of the personnel taking such actions.

4.4.3 Preproduction tests. The preproduction tests shall consist of all tests specified under 4.6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

4.5 Quality conformance tests. The quality conformance tests shall consist of the following:

a. Individual tests . . . . . See 4.5.1

b. Sampling plan and tests . . . . . See 4.5.2.

4.5.1 Individual tests. Each extinguisher unit shall be subjected to the following tests as described under 4.6:

a. Examination of product . . . . . See 4.6.1

b. Mechanical inspection . . . . . See 4.6.2

c. Hydrostatic pressure . . . . . See 4.6.3

d. Leakage . . . . . See 4.6.4

e. Relief valve . . . . . See 4.6.5.

4.5.2 Sampling plan and tests. One extinguisher unit shall be selected at random from each fifty, or fraction thereof produced, and subjected to the following tests as described under 4.6:

a. Roadability . . . . . See 4.6.6

b. Agent discharge . . . . . See 4.6.7.

4.5.2.1 Rejection and retest. When an item selected from a production run fails to meet the specification, items still on hand or later produced shall not be accepted until the extent and cause of failure have been determined and appropriately corrected. The contractor shall explain to the Government representative the cause of failure and the action taken to preclude recurrence. After correction, all tests shall be repeated.

4.5.2.2 Individual tests may continue. For production reasons, individual tests may be continued pending the investigation of a test failure. Final acceptance of the items on hand or produced later shall not be made until it is determined that all items meet all the requirements of the specification.

4.5.3 Defects in items already accepted. The investigation of a test failure could indicate that defects may exist in items already accepted. If so, the contractor shall fully advise the procuring activity of all defects likely to be found and methods of correcting them.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:43Z
Check the source to verify that this is the currentversion before use.

4.6 Test methods

4.6.1 Examination of product. The extinguisher unit shall be inspected to determine compliance with requirements of this specification with respect to dimensions, materials, finishes, markings, workmanship, and installation of components.

4.6.2 Mechanical inspection. A critical inspection shall be made of the extinguisher unit and all components including fastening devices, data plates, valves, gages, piping, hose, operating controls, et cetera, and data recorded as to their condition, defects in manufacture, damage in transit, and damage through use prior to test.

4.6.3 Hydrostatic pressure. With pressure relief devices removed and openings plugged, the agent tank and all connected and associated components and accessories that operate under pressure shall be pressure tested in accordance with section VIII of the ASME Boiler and Pressure Code for Unfired Pressure Vessels. In addition, each hose assembly shall be hydrostatically pressure tested at not less than two times the maximum working pressure for not less than 5 minutes. The initial and final pressures, and evidence of leakage or impending failures, shall be recorded. At the completion of this test, the test fluid shall be completely drained and the components thoroughly dried.

4.6.4 Leakage. With the agent tank charged with 50 pounds of dichlorodifluoromethane (CCl_2F_2), the extinguisher unit shall be subjected to an ambient temperature of not less than 70°F for a period of not less than 24 hours. At the end of the 24-hour period, a Halogen Leak Detector, such as the GE Type H-25, shall be used to determine the leakage rate at all seams, threaded connections, valves, and gages.

4.6.5 Relief valve. Prior to installation on the extinguisher unit, the spring-loaded relief valve shall be subjected to a gradually increasing pressure of clean, dry, oil-free air or nitrogen at its inlet until it starts to discharge. The pressure then shall be reduced until the valve completely reseals. This procedure shall be repeated not less than two times. Following this test, the valve shall be checked for leakage by application of a soap film (film across the outlet and over all outside surfaces) with not less than the maximum working pressure of the component which the valve will be used to protect being applied at the valve inlet. Failure to open or reseal within the specific limits or an indication of leakage during the soap film test shall be recorded.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

4.6.6 Roadability. With the extinguisher unit secured in the bed of a pick-up truck, the agent tank filled to capacity with 500 pounds of bromochlorodifluoromethane, and the nitrogen bottle fully charged with nitrogen or dry air and the agent tank pressurizing valve closed, the unit shall be subjected to operation over improved and unimproved roads as follows. Upon completion of each run, the unit shall be inspected for looseness of and damage to components, agent leakage, and loss of pressure as a result of vibrations, jarring, and other conditions incident to the road test.

a. Paved roads for a distance of 100 miles at an average speed of 45 mph

b. Graded gravel roads for a distance of 100 miles at an average speed of 25 mph.

4.6.7 Agent discharge. Upon successful completion of the roadability test, the agent tank shall be pressurized to 200 psi from the nitrogen bottle, and bromochlorodifluoromethane shall be discharged from the handline nozzle without assist from downwind conditions. During this discharge, the nozzle shall be held horizontal with and 4 feet above ground level, and a steady discharge rate shall be maintained until pressure pulsations or interruptions to flow occur. The discharge rate, range, pattern, and percentage of agent discharged prior to pressure pulsations or interruption to flow shall be observed for compliance with operational requirements. The percentage of agent discharged may be measured by weighing the agent tank when empty, then when full, and again after test. The following observations shall also be made:

a. That the handline can be easily withdrawn with intermittent starts and stops without hose reel overtravel, and that the handline can be easily rewound back onto the reel

b. That a bayonet applicator, with joint conforming to figure 1, can be inserted and secured in the nozzle valve assembly and agent discharge through the installed applicator.

4.6.8 Fire test. A 3-foot diameter pan, containing approximately 6 inches of water and a top 2-inch layer of JP-4 fuel, shall be ignited and allowed to burn for at least 30 seconds. It shall then be demonstrated that the extinguisher unit can extinguish the fire without assist from downwind conditions and with the nozzle held at a distance of not less than 20 feet from the fire.

4.6.9 Determination of weight. The empty and full weights of the fully assembled extinguisher unit shall be determined.

4.7 Inspection of preparation for delivery. Preservation, packaging, packing, and marking for shipment and storage shall be inspected to determine conformance to the requirements of section 5.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:43Z
Check the source to verify that this is the currentversion before use.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or C as specified (see 6.2.1).

5.1.1 Level A. The extinguisher unit shall be prepared Method III, MIL-P-116. Components of the tank unit and the reel unit, not disassembled, shall be adequately secured to prevent movement and damage in accordance with MIL-STD-1186. Accessories and disassembled parts shall be wrapped, cushioned and packaged in a wood or cleated plywood container(s). The disassembled parts marked as to identity and proper location on the assembled item. Exposed gages, controls, and similar items shall be wrapped with a waterproof barrier and taped with waterproof tape. All openings shall be closed with plugs, caps or waterproof barrier and tape.

5.1.2 Level C. Level C shall be the same as level A except the accessory container(s) may be fiberboard of sufficient strength and the barrier material and tape need not be waterproof.

5.2 Packing. Packing shall be level A or C as specified (see 6.2.1). Should level B be specified, level A shall apply.

5.2.1 Level A. Each complete extinguisher unit shall be packed within a container conforming to Type II, Style A, Class 1, plywood superstructure MIL-B-26195. The tank unit, reel unit and accessory container(s) shall be secured to the container base in accordance with MIL-STD-1186.

5.2.2 Level C. Level C shall be the same as level A except the container shall be Type I and the container superstructure may be attached by nailing in lieu of lag bolts.

5.3 Markings. Marking for shipment and storage shall be in accordance with MIL-STD-129. Additional markings shall be as specified (see 6.2.1).

6. NOTES

6.1 Intended use. The FEU-4/S32P extinguisher unit is intended for installation in the bed of the pickup truck and subsequent use for fire protection at flight line and other airfield facilities.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification

b. In the event it becomes necessary to change the drawings (see 3.2) in order to achieve the performance requirements of the specification, the contractor

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:43Z
Check the source to verify that this is the current version before use.

will immediately notify the contracting officer with recommendations for drawing changes to obtain the required performance. To the extent approved, such changes will be processed in accordance with the provisions of the changes clause of this contract

c. Location and conditions for preproduction testing (see 4.4)

d. Level of preservation and packaging required (see 5.1)

e. Level of packing required (see 5.2)

f. Additional markings if required (see 5.3).

6.3 Identification of changes. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodian:
Air Force - 11

Reviewer:
Air Force - 84

Preparing activity:
Air Force - 11

Project No. 4210-F116

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

C16061

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:43Z
Check the source to verify that this is the current version before use.

FOLD

ASD/ENYESS
Wright-Patterson AFB, O 45433

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE AIR FORCE
DoD-318

U.S. MAIL

ASD/ENYESS
Wright-Patterson AFB, Ohio 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.