MIL-P-82491(OS)
26 July 1967

Superseding
NOTS XS 508 Rev. K
12 May 1967

MILITARY SPECIFICATION

POWER SUPPLY

MARK 112 MOD 1

This specification has been approved by the Naval Ordnance Systems Command, Department of the Navy

1. SCOPE

1.1 This specification establishes the requirements of one type of Power Supply, Mark 112 Mod 1. (See 6.1 for intended use and description.)

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on the date of invitation for bids, form a part of this specification to the extent specified herein except as noted.

SPECIFICATION

MILITARY

MIL-E-5272	Environmental Testing, Aeronautical and Associated Equipment, General Specification for

STANDARDS

FEDERAL

FED-STD-102	Preservation, Packaging, and Packing Levels

MILITARY

MIL-STD-105 D	Sampling Procedures and Tables for Inspection by Attributes

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:41Z
Check the source to verify that this is the current version before use.

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-167	Mechanical Vibration of Shipboard Equipment

DRAWINGS

BUREAU OF NAVAL WEAPONS

LD 497822	Power Supply, Mark 112 Mod 1 and all drawings listed thereon
LD 540617	Shipping (Packing) Condition for one Power Supply, Mark 112 Mod 1, and all drawings listed thereon
LD 540618	Preserved (Packaging) Condition for Power Supply, Mark 112 Mod 1, and all drawings listed thereon
LD 541492	Test Set, Electrical Load Sequencer and all drawings listed thereon

PUBLICATIONS

BUREAU OF NAVAL WEAPONS

OD 13002	Operation and Maintenance Instructions for Electrical Load Sequencer Test Set

(Copies of specifications, standards, drawings, and publications requested by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 General requirements. Unless otherwise specified in the contract or order, all materials and treatments of materials and parts used in the manufacture of the power supply shall be in accordance with the requirements specified herein and with the applicable documents listed in BuWeps LD 497822.

3.2 Preproduction samples. Unless otherwise specified in the contract or order, preproduction samples of the power supply shall be manufactured using the methods and procedures proposed for production. The sample shall be tested as specified in Section 4 herein and is for the purpose of determing that, prior to starting production, the contractor's production methods are capable of yielding items that comply with the technical requirements of the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:41Z
Check the source to verify that this is the current version before use.

3.3 Performance and product characteristics. The power supply shall meet the following performance and product characteristics.

3.3.1 Insulation resistance. After being conditioned at a temperature of 75 plus or minus 5 degrees Fahrenheit (F) and a relative humidity of 75 plus or minus 5 percent for a period of not less than twenty-four hours, the insulation resistance shall not be less than 100 megohms. When the insulation resistance is measured during or subsequent to the environmental tests as specified in 4.5, there shall be no temperature or humidity conditioning other than that required by the individual environmental test and the insulation resistance shall then be 20 megohms minimum. The test potential shall be 500 plus or minus 50 volts DC. The insulation resistance shall be measured between the following mutually insulated points:

a. Frame

b. Monitor circuits shorted together

c. Igniter circuits shorted together

d. Battery circuits shorted together

3.3.2 Electrical continuity and circuit resistance. The following circuits shall be continuous and shall have a circuit resistance as shown:

Circuits	Resistance (ohms)
Monitor	0.10 maximum
Battery Common Ground	0.05 maximum
Igniter Common Ground	0.05 maximum
Igniters	0.325 plus or minus 0.040

3.3.3 Polarity. The power supply shall produce sufficient voltage across the positive and negative terminals to provide a means of determining polarity.

3.3.4 Functioning. The power supply when activated shall supply direct electrical current to each of the two power output channels. The voltage shall meet the minimum requirements as specified in Table I.

Table I. Functioning Voltage

Time(sec)	Action	Load (at 28 volts DC nominal)	Voltage DC (across load)
0	Activate battery	None	None
1	None	None	18 - 32 volts

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:41Z
Check the source to verify that this is the current version before use.

Table I. Functioning Voltage (Continued)

Time (sec)	Action	Load (at 28 volts DC nominal)	Voltage DC (across load)
20 ±1	Apply load	4 amps, decaying exponentially to 0.5 amp in 0.5 second	50 milliseconds after application of load, the voltage shall be 24 - 32 volts
20.5 Nominal	None	0.5 amp	24 - 32 volts
60 ±1.5	Change load	10 amps total including existing 0.5 amp decaying exponentially to 1.0 amp in 2 seconds	The minimum voltage at 10 amps shall never be below 21 volts; 100 milliseconds after application of load the voltage shall be 24 - 32 volts
62 Nominal	None	1.0 amp	24 - 32 volts
75 ±1.5	Change load	5 ohms non-inductive additional load	5 milliseconds after application of load the voltage shall be 22 - 32 volts
75.075 Nominal	None	1.0 amp	No voltage reading required

3.3.5 Monitor circuit, actuated. The monitor circuit, after the power supply has been subjected to the tests of 4.6.2.4, shall have a resistance of not less than 1 megohm under an applied potential of 100 plus or minus 10 volts DC.

3.4 Environmental requirements. Unless otherwise specified, the power supply shall be capable of conforming to the performance and product characteristics of this specification after being exposed to the environments and all conditions specified herein.

3.4.1 Temperature.

3.4.1.1 Operating condition. The power supply shall meet the performance and product characteristics while at temperatures from 35 to 120 degrees F.

3.4.1.2 Storage condition. The power supply shall withstand temperatures from minus 65 to plus 160 degrees F.

3.4.2 Humidity. The power supply shall withstand relative humidity up to 95 percent as specified in MIL-E-5272 Procedure I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:41Z
Check the source to verify that this is the current version before use.

3.4.3 Salt spray. The power supply shall withstand salt spray conditions as specified in MIL-E-5272 Procedure I on the exposed surface as shown in Figure 1.

3.4.4 Acceleration. The power supply shall withstand an acceleration of 25g (g = unit of gravitational acceleration) for 4 seconds applied in the direction shown in Figure 2.

3.4.5 Vibration.

3.4.5.1 Standby condition. The power supply shall withstand vibration as specified for Type I equipment in MIL-STD-167 up to 25 cycles per second (cps).

3.4.5.2 Operating condition. The power supply shall withstand vibration through a frequency range of 20 to 2000 cps at 0.10-inch double amplitude or 10g, whichever is less, and thereafter shall meet the performance and product characteristics of this specification, except the requirement for electrical continuity and circuit resistance of the monitor circuit, 3.3.2.

3.4.6 Shock.

3.4.6.1 Standby condition. The power supply shall withstand shocks of 40g peak magnitude. The shock shall have a pulse shape approximating a one-half sine wave having a duration of 5 milliseconds.

3.4.6.2. Operating condition.

3.4.6.2.1 Major. The power supply shall withstand a shock of 2400g peak magnitude in the direction shown in Figure 2. The shock shall have a pulse shape approximating a one-half sine wave having a duration of 1 millisecond. Thereafter, the power supply shall meet the performance and product characteristics of this specification, except the requirement for electrical continuity and resistance of the monitor circuit, 3.3.2.

3.4.6.2.2 Minor. The power supply shall withstand two shocks of 1200g peak magnitude, 90 degrees apart and perpendicular to the major shock axis. The shock shall have a pulse shape approximating a one-half sine wave having a duration of 1 millisecond. Thereafter, the power supply shall meet the performance and product characteristics of this specification, except the requirement for electrical continuity and resistance of the monitor circuit, 3.3.2.

3.5 Workmanship. The workmanship and finish shall be of sufficiently high grade to assure satisfactory operation consistent with the requirements of this specification. All parts used in the assembly shall be thoroughly clean and free of excess materials, chips, and loose or splattered foreign materials. The standards of workmanship exhibited in any approved preproduction sample, subject to any qualification stated in the Government's notice of approval, shall be

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:41Z
Check the source to verify that this is the currentversion before use.

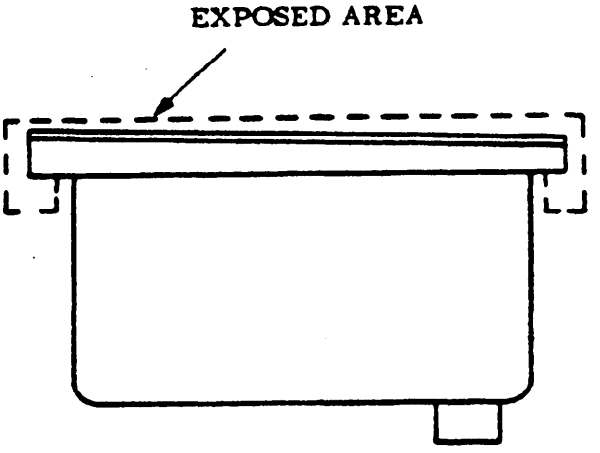


Figure 1. Environmental Test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:41Z
Check the source to verify that this is the current version before use.

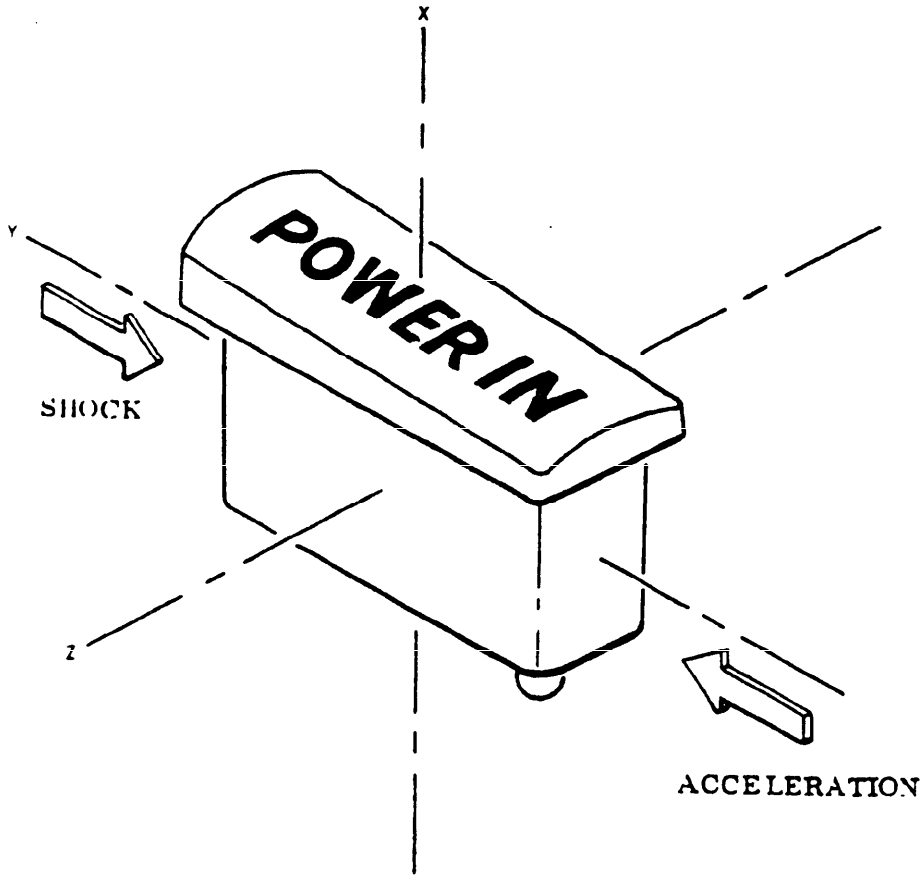


Figure 2. Vibration, Acceleration and Shock Axes

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:41Z
Check the source to verify that this is the current version before use.

determinative of the requirements of the contract relative to workmanship insofar as not specifically covered by applicable specifications.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. Inspection of the power supply shall be classified as follows:

a. Preproduction and periodic production inspection. (See 4.5.)

b. Quality conformance inspection. (See 4.6.)

4.3 Sampling. (See 6.2.1.)

4.3.1 Lot size. The term "lot" shall mean "inspection lot", that is a collection of product submitted by a supplier for inspection. Unless otherwise specified in the contract or order the number of product in each lot shall be three hundred (300).

4.3.2 Preproduction sample. A preproduction sample of ten (10) power supplies, manufactured in accordance with 3.2, shall be subjected to the preproduction tests detailed in 4.5. Acceptance of the preproduction sample shall be based on no defects in the sample. Further production of the power supply by the supplier, prior to approval of the preproduction sample, shall be at the supplier' s risk.

4.3.3 Periodic production sample. From each succeeding lot of three hundred (300) or less, a random sample of six (6) power supplies shall be selected. These sample units shall be subjected to the tests of 4.5. The power supplies shall be considered satisfactory if they meet all specification and pertinent drawing requirements and withstand the tests specified in 4.5. (See Table II). When a defective unit is found in any lot, acceptance of all units in the lot shall be withheld and the contractor shall:

a. Determine the cause of the defect.

b. Take the necessary action, with the concurrence of the procuring activity, to correct or eliminate the defect from all units in the lot and, if so directed by the procuring activity, from those units previously shipped.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:41Z
Check the source to verify that this is the current version before use.

c. Submit to the procuring activity for approval, the proposed corrective action to prevent recurrence of the defect.

4.3.4 Quality conformance inspection sampling. Samples shall be selected as specified in 4.6 and shall be used to determine the acceptability of the power supply inspected as specified in 4.6.

Table II. Preproduction and Periodic Production Test Sequence

Test	Paragraph Number	Test Quantities Preproduction	Periodic
Quality Conformance Inspection	4.6*	10	6
Temperature, Storage Condition	4.5.1.2	10	6
Quality Conformance Inspection	4.6**	10	6
Humidity	4.5.1.3	10	-
Quality Conformance Inspection	4.6**	10	6
Salt Spray	4.5.1.4	10	6
Quality Conformance Inspection	4.6**	10	6
Vibration, Standby Condition	4.5.1.6	10	6
Shock, Standby Condition	4.5.1.8	10	6
Quality Conformance Inspection	4.6**	10	6
Function Test and Monitor Circuit Test	4.6.2.4 4.6.2.5	3***	1***
Acceleration	4.5.1.5	7	5
Quality Conformance Inspection	4.6**	7	5
Vibration, Operating Condition	4.5.1.7	7	5
Quality Conformance Inspection	4.6**	7	5
Shock, Operating Condition	4.5.1.9		
Major	4.5.1.9.1	3	2
Minor	4.5.1.9.2	4	3

*Except for Function and Monitor Circuit test, 4.6.2.4 and 4.6.2.5
**Except for Polarity, Function, and Monitor Circuit Tests, 4.6.2.3, 4.6.2.4 and 4.6.2.5
***Samples are expended during functioning.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:41Z
Check the source to verify that this is the current version before use.

Table II. Preproduction and Periodic Production Test Sequence (Continued)

Test	Paragraph Number	Test Quantities Preproduction	Periodic
Quality Conformance Inspection	4.6**		
Temperature, Operating Condition	4.5.1.1		
Low Extreme	4.5.1.1.1	3	2
Quality Conformance Inspection	4.6**		
Functioning Test and	4.6.2.4	3***	2***
Monitor Circuit Test	4.6.2.5		
High Extreme	4.5.1.1.2	4	3
Quality Conformance Inspection	4.6**		
Functioning Test and	4.6.2.4	4***	3***
Monitor Circuit Test	4.6.2.5		

*Except for Function and Monitor Circuit Tests, 4.6.2.4 and 4.6.2.5
**Except for Polarity, Function, and Monitor Circuit Tests, 4.6.2.3, 4.6.2.4 and 4.6.2.5
***Samples are expended during functioning.

4.4 Test Equipment.

4.4.1 Quality conformance inspection equipment. The following items of test equipment are required to perform the quality conformance inspection tests:

Equipment	Capability
a. Electrometer	Input resistance 10^{12} ohms; determine polarity at 0.01 volt minimum.
b. Temperature chamber	Maintain temperature at plus 160, plus 0 minus 5 degrees F.
c. Ohmmeter, current limited	0.00 to 0.50 ohm; accuracy plus or minus 3 percent; maximum current of 10 ma.
d. Low resistance measuring device	0.00 to 0.10 ohm; accuracy 5 percent.
e. Megohmmeter	0 to 100 megohms; accuracy 10 percent at 20 and 100 megohms with 500 plus or


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:41Z
Check the source to verify that this is the current version before use.

Equipment	Capability
	minus 50 volts DC potential, and plus or minus 10 percent at 1 megohm with 100 plus or minus 10 volts DC potential.
f. Conditioning chamber	Maintain temperature at plus 75 plus or minus 5 degrees F and a relative humidity of 75 plus or minus 5 percent.
g. Electrical load sequencer test set	BuWeps LD 541492. Operate in accordance with OD 13002.

4.4.2 Preproduction and periodic production test equipment. The following items of test equipment, in addition to selected items of quality conformance inspection equipment and pieces of equipment recommended by applicable specifications or standards referenced within test procedure paragraphs, are required to perform the preproduction and periodic production test:

Equipment	Capability
a. Temperature chamber	Minus 65 plus 5 minus 0 degrees F Plus 35 plus 5 minus 0 degrees F Plus 120 plus 0 minus 5 degrees F Plus 160 plus 0 minus 5 degrees F
b. Centrifuge	0.00 to 27.5g; maintain acceleration at 25 plus 2.5 minus 0g. Test item, excluding test fixture Figure 3, weighs approximately ten pounds.
c. Vibration testing machine	Control frequency from 20 cps to 2000 cps while subjecting a test item weighing approximately ten pounds, excluding test fixture, to 0.10-inch double amplitude or 10g acceleration, vibration along specified axes.
d. Shock equipment, standby	Apply shocks of 40 plus or minus 4g; a one-half sine wave pulse shape of 5 plus 3 minus 0 milliseconds time duration; maintain direction along specified axes.
e. Shock equipment, operating	Apply shocks of up to 2400g plus or minus 10 percent; a one-half sine wave pulse shape of 1 plus or minus 0.25 millisecond time duration; maintain direction along specified axes.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:41Z
Check the source to verify that this is the current version before use.

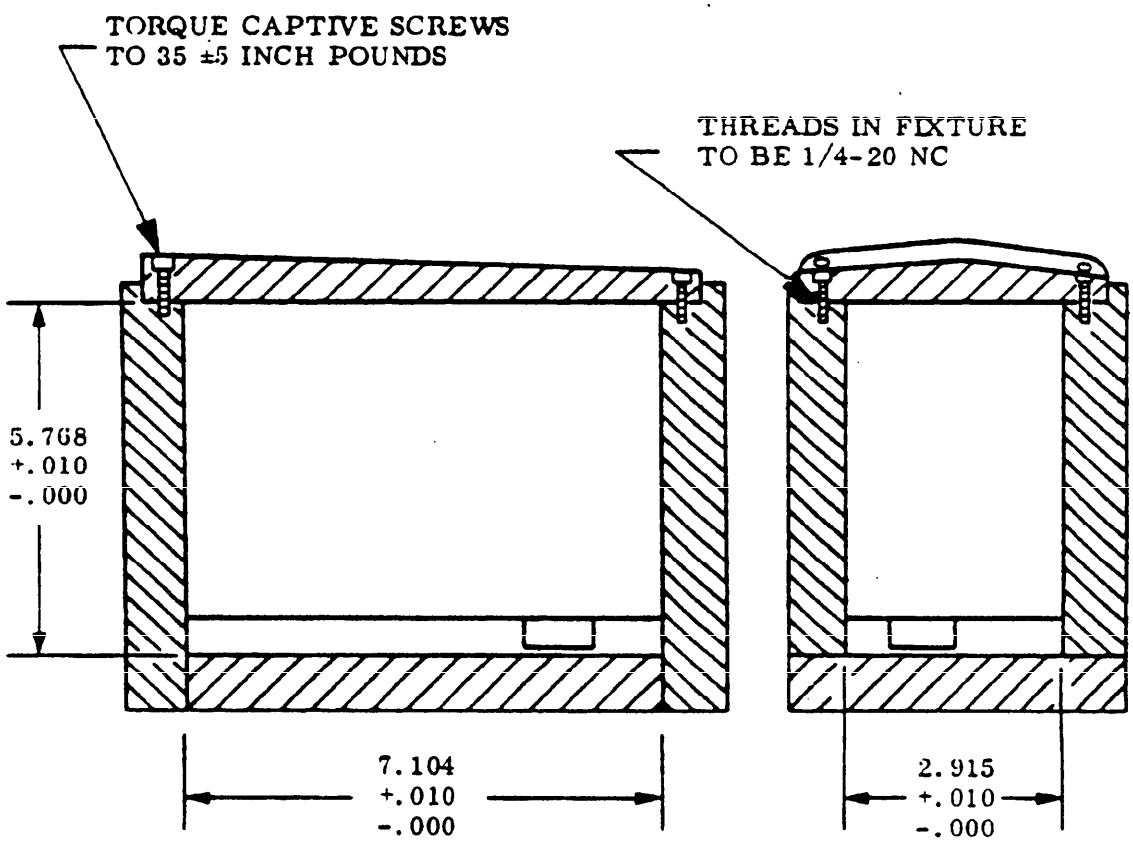

NOTE: INSIDE DIMENSIONS OF CAVITY TO BE AS SHOWN. POWER SUPPLY TO BE SECURED TO FIXTURE BY 6 CAPTIVE SCREWS.

Figure 3. Vibration, Acceleration and Shock Test Fixture

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:41Z
Check the source to verify that this is the current version before use.

4.5 Preproduction and periodic production inspections. The preproduction and periodic production samples shall be subjected to the tests specified in 4.5.1 after satisfactorily passing the quality conformance inspections of 4.6.2.1, 4.6.2.2, 4.6.2.3 and 4.6.2.6.

4.5.1 Test procedure. Subject the power supply to the test sequence listed in Table II. Unless otherwise specified in the individual test paragraph, the quality conformance inspection as specified in Table II, shall be performed subsequent to environmental tests under test conditions specified in 4.6.1. Failure of the power supply to pass any one of these tests shall constitute a defective unit.

4.5.1.1 Temperature, operating condition.

4.5.1.1.1 Low extreme. The power supply selected from the sample units as indicated in Table II shall be subjected to a temperature of 35 plus 5 minus 0 degrees F for not less than 2 hours and while at that temperature shall pass the quality conformance tests except for the polarity test, 4.6.2.3.

4.5.1.1.2 High extreme. The power supply selected from the sample units as indicated in Table II shall be subjected to a temperature of 120 plus 0 minus 5 degrees F for not less than 2 hours and while at that temperature shall pass the quality conformance tests except for the polarity test, 4.6.2.3.

4.5.1.2 Temperature, storage condition. The power supply shall be subjected to a temperature of minus 65 plus 5 minus 0 degrees F for not less than 48 hours. The temperature shall be raised to plus 160 plus 0 minus 5 degrees F in not less than 2 hours and maintained at this temperature for not less than 48 hours. The unit shall then be subjected to room temperature for not less than 4 hours prior to performing subsequent tests.

4.5.1.3 Humidity. Unless otherwise specified in the contract or order, this test shall be performed on preproduction sample units only. The power supply shall be subjected to Humidity Test, Procedure I as specified in Mil-E-5272.

4.5.1.4 Salt spray. The exposed area of the power supply, shown in Figure 1, shall be subjected to Salt Spray Tests as specified in MIL-E-5272, Procedure 1.

4.5.1.5 Acceleration. The power supply, mounted as shown in Figure 3, shall be subjected to acceleration of 25 plus 2.5 minus 0g in the direction shown in Figure 2 for not less than 4 seconds.

4.5.1.6 Vibration, standby condition. The power supply rigidly mounted as shown in Figure 3, shall be subjected to the vibration tests for Type I equipment as specified in MIL-STD-167 up to 25 cps in each of the three axes shown in Figure 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:41Z
Check the source to verify that this is the current version before use.

4.5.1.7 Vibration, operating condition. The power supply, rigidly mounted as shown in Figure 3, shall be subjected to vibration from 20 to 2000 cps at 0.10-inch double amplitude or 10g, whichever is less, along each of three mutually perpendicular axes. The frequency shall be increased uniformly from 20 to 2000 cps. The frequency shall be traversed in not less than 2.5 minutes, once in each axis. Thereafter, the power supply shall pass the quality conformance inspection tests except the test of electrical continuity and resistance of the monitor circuit, 4.6.2.2.

NOTE: Instrumentation used for the shock test shall not employ a filter with a cut-off frequency below 10 kc.

4.5.1.8 Shock, standby condition. Subject the power supply to shocks of 40 plus or minus 4g peak magnitude with a pulse shape approximating a one-half sine wave, and a duration of 5 plus 3 minus 0 milliseconds. Shocks shall be applied three times in each direction along each of three mutually perpendicular axes as shown in Figure 2. Mount the power supply in a manner similar to that shown in Figure 3.

4.5.1.9 Shock, operating condition. The power supply shall be mounted as shown in Figure 3, and subjected to the following tests:

4.5.1.9.1 Major. Subject the power supply to a shock of 2400 plus or minus 240g peak magnitude. The shock shall have a pulse shape approximating a one-half sine wave having a duration of 1 plus or minus 0.25 millisecond. Apply the shock in the direction shown in Figure 2. Thereafter, the power supply shall pass the quality conformance inspection tests except the test of electrical continuity and resistance of the monitor circuit, 4.6.2.2.

4.5.1.9.2 Minor. Subject the power supply to two shocks of 1200 plus or minus 120g peak magnitude. The shocks shall have a pulse shape approximating a one-half sine wave having a duration of 1 plus or minus 0.25 millisecond. Apply the shocks in two directions 90 degrees apart and perpendicular to the major shock axis. Thereafter, the power supply shall pass the quality conformance inspection tests except the test of electrical continuity and resistance of the monitor circuit, 4.6.2.2.

4.6 Quality conformance inspection. Samples selected using the plans and procedures set forth in Table III of this specification shall be subjected to the tests and examinations as described in 4.6.2.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:41Z
Check the source to verify that this is the current version before use.

Table III. Quality Conformance Tests and Examinations and AQL

Test	Sampling Plan	AQL	Test Paragraph
Insulation resistance	*	1.0	4.6.2.1
Electrical continuity and circuit resistance test	*		4.6.2.2
Monitor		2.5	
Battery common ground		1.0	
Igniters common ground		1.0	
Igniters		0.25	
Polarity test	*	0.25	4.6.2.3
Functioning test	**	**	4.6.2.4
Monitor circuit test after functioning	**	**	4.6.2.5
Visual examination	***	***	4.6.2.6
Preservation. packaging packing and marking	***	***	4.7

*MIL-STD-105D Inspection Level II
**MIL-STD-105D Special Inspection Level S-3; zero defects accepted.
***One-hundred percent inspection: defect is cause for rejection of individual unit.

4.6.1 Test conditions. Unless otherwise specified, the power supply shall be subjected to the quality conformance inspection under the following conditions:

a. Temperature - Room ambient (65 to 95 degrees F)

b. Altitude - Normal ground atmospheric pressure

c. Humidity (Relative) - Room ambient up to 95 percent

4.6.2 Test procedure. The power supply shall be subjected to the tests and examinations as outlined herein. Unless otherwise specified, inability of the power supply to pass the tests and examinations shall constitute a failure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:41Z
Check the source to verify that this is the current version before use.

WARNING

The igniter circuits must be shorted together during insulation resistance test to prevent inadvertent energizing of the power supply.

4.6.2.1 Insulation resistance. Place the power supply in a conditioning chamber and maintain the temperature at 75 plus or minus 5 degrees F and the relative humidity at 75 plus or minus 5 percent for a period of not less than twenty-four hours. Remove the power supply from the chamber within 10 minutes measure the insulation resistance between the mutually insulated points listed below. The applied potential shall be 500 plus or minus 50 volts DC. The insulation resistance shall not be less than 100 megohms. When this test is performed during or subsequent to the environmental tests specified in 4.5.1, there shall be no temperature or himidity conditioning other than that required by the individual environmental test; the insulation resistance shall then be 20 megohms minimum. The mutually insulated points are:

a. Frame

b. Igniter circuits shorted together

c. Monitor circuits shorted together

d. Battery circuits shorted together.

4.6.2.2 Electrical continuity and circuit resistance test. Using the ohmmeter specified in 4.4.1 measure the resistance of the circuits listed in Table IV.

WARNING

Only the current limited ohmmeter specified in 4.4.1 shall be used to measure the resistance of the igniter circuits, contacts 4 and 9, and 5 and 12, since a current greater than 10 ma may activate the igniters.

Table IV. Continuity and Resistance Test Values

Circuit	Contacts	Resistance (ohms)
Monitor	7 and 8	0.10 maximum
Battery common ground	6 and 11	0.05 maximum
Igniter common ground	4 and 12	0.05 maximum
Igniters	4 and 9 and 5 and 12	0.325 ± .040

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:41Z
Check the source to verify that this is the currentversion before use.

4.6.2.3 Polarity. Attach the positive and negative leads of the electrometer specified in 4.4.1, to the power supply connector as follows:

Positive	Negative
Pin 3	Pin 11
Pin 10	Pin 6

The deflection of the indicator on the electrometer shall show positive voltage. Upon failure to obtain a satisfactory indication of correct polarity, proceed to 4.6.2.3.1.

4.6.2.3.1 Alternate method. When the test of 4.6.2.3 produces no readable deflection on the electrometer, place the power supply in an oven for not less than 2 hours at a temperature of 160 plus 0 minus 5 degrees F. Perform the test specified in 4.6.2.3 with power supply at this temperature. Failure to obtain a satisfactory indication of correct polarity shall be cause for rejection of individual power supplies.

4.6.2.4 Functioning test. Using the electrical load sequencer test set specified in 4.4.1, apply loads specified in Table I. Make a continuous record of the voltages across each channel of the power supply for at least two seconds before and after each specified voltage reading point. Make a photograph of the oscilloscope trace of the voltage during the application of the 75-second load. The power supply shall meet the voltage requirements specified in Table I.

4.6.2.5 Monitor circuit test after functioning. Using the megohmmeter specified in 4.4.1, measure the resistance of the monitor circuit, contacts 7 to 8. The resistance shall be greater than 1 megohm when the applied potential is 100 plus or minus 10 volts DC and the power supply has been activated.

4.6.2.6 Visual examination. Visual examination shall be made on each power supply submitted for delivery to the procuring agency. The power supply shall be examined for conformance to the requirements of good workmanship in 3.5. Nonconformance is cause for rejection of individual unit.

4.7 Preservation, packaging, packing and marking. The power supply shall be examined for conformance to the prescribed preservation, packaging, packing, and marking requirements of Section 5.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be Level A or C as specified (See 6.2b and 6.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:41Z
Check the source to verify that this is the current version before use.

5.1.1 Level A. Cleaning, drying, preservation and packaging methods for Level A shipment shall be in accordance with the instructions contained in the applicable documents listed in BuWeps LD 540618.

5.1.2 Level C. Cleaning, drying, preservation and packaging shall be in accordance with the supplier's commercial practice, when such practices have been approved by the procuring activity.

5.2 Packing. Packing shall be Level A or C as specified (See 6.2c and 6.4).

5.2.1 Level A. Multiples of the power supply preserved and packaged in accordance with 5.1.1, shall be packed in accordance with BuWeps LD 540617.

5.2.2 Level C. The power supply, packaged as specified in 5.1.2, shall be packed to afford protection against damage during direct shipment from the supply source to the first receiving activity for immediate use. Containers shall comply with common carrier regulations applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or order. unit packages, intermediate packages, and shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

6. NOTES

6.1 Intended use and description.

6.1.1 Intended use: The power supply is intended for use as a power source for the fuzing circuit of a depth charge.

6.1.2 Description. The power supply is a device designed to produce low voltage power upon receipt of an externally applied electrical signal.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification

b. Required level of preservation and packaging

c. Required level of packing

d. Any exceptions to this specification.

6.2.1 Additional samples Additional samples required because of failure of any sample(s) to pass the prescribed inspections shall be provided and inspected at the expense of the supplier.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:41Z
Check the source to verify that this is the current version before use.

6.3 Definitions. For the purpose of this specification the following definitions have been established.

6.3.1 Unit condition.

6.3.1.1 Operating. The condition of the power supply when performing its required function.

6.3.1.2 Standby. Standby is the condition of the power supply when aboard ship and is:

a. Stored, handled or transported.

b. Assembled with the end item and installed on the launching mechanism prior to operation.

6.4 Preparation for delivery criteria. Criteria for use of the proper level of preservation, packaging, and packing shall be as specified in Federal Standard 102.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:41Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:41Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involv in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity (as indicated on reverse hereof).

SPECIFICATION
MIL-P-82491(OS) POWER SUPPLY MARK 112 MOD 1

ORGANIZATION (Of submitter)	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS (Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)

SUBMITTED BY (Printed or typed name and activity)	DATE

DD FORM 1 APR 63 1426

C-0879

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:41Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Ordnance Systems Command
Washington, D.C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

NAVAL ORDNANCE SYSTEMS COMMAND (ORD 9343)
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:41Z
Check the source to verify that this is the current version before use.