MILITARY SPECIFICATION

SURVIVAL KIT CONTAINER, CNU-111/P

This specification is approved for use by the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for one type of survival kit container, designated CNU-111/P, for use with USAF F-4 aircraft.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified (see 6.2), the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specification and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

	L-P-383	Plastic Material, Polyester Resin, Glass Fiber Base, Low Pressure Laminated
*	PPP-B-601	Boxes, Wood, Cleated Plywood
*	PPP-B-636	Box, Shipping, Fiberboard

MILITARY

MIL-P-116	Preservation, Methods of
MIL-W-4088	Webbing, Textile, Woven Nylon
MIL-S-5002	Surface Treatments and Inorganic Coatings for Metal Surfaces of Weapons Systems
MIL-C-5688	Cable Assemblies, Aircraft, Proof Testing and Prestretching of
MIL-C-6021	Casting, Classification and Inspection of
MIL-T-6117	Terminal, Cable Assemblies, Swaged Type
MIL-W-6858	Welding, Resistance, Spot and Seam

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: the Engineering Division, San Antonio Air Logistics Center, Kelly AFB TX 78241 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

MIL-R-7575	Resin, Polyester, Low-Pressure Laminating
MIL-I-8500	Interchangeability and Replaceability of Component Parts for Aircraft and Missiles
MIL-T-8504	Tubing, Steel, Corrosion-Resistant (304) Aerospace Vehicle Hydraulic Systems, Annealed, Seamless and Welded.
MIL-W-8611	Welding, Metal Arc and Gas, Steels, and Corrosion and Heat Resistant Alloys, Process for
MIL-A-8625	Anodic Coatings, for Aluminum and Aluminum Alloys
MIL-R-9300	Resin, Epoxy, Low-Pressure Laminating
MIL-P-9400	Plastic Laminate and Sandwich Construction Parts, Aircraft Structural, Process Specification Requirements
MIL-F-21840	Fastener Tape, Hook and Pile, Synthetic
MIL-T-26089	Tape, Textile, Nylon Loop
MIL-C-83124	Cartridge Actuated Devices/Propellant actuated general design specification for
MIL-W-83420	Wire, Rope, Flexible for Aircraft Control
MIL-L-83491A	Life Rafts, Inflatable, LRU-16/P and LRU-17/P
MIL-S-83862	Strap, Retention, Survival Kit
MIL-C-83864	Container, Inner, Survival Kit

STANDARDS

FEDERAL

FED-STD-H28	Screw Thread Standards for Federal Services
FED-STD-406	Plastic, Methods of Testing
FED-STD-595	Colors

MILITARY

DOD-STD-100	Engineering Drawing Practices
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of U. S. Military Property
MIL-STD-143	Standards and Specifications, Order of Precedence for the Selection of
MIL-STD-810	Environmental Test Methods and Engineering Guidelines
MIL-STD-846	Escape System Testing, Ground, Track and Flight Test
MIL-STD-889	Dissimilar Metals
MS17983	Compass - Magnetic, Pilots Standby

2.1.2 Other Government documents, drawings, and publications. The following other Government documents form a part of this specification to the extent specified herein.

DRAWINGS

Air Force

62E4336	Pattern-Life Raft Retainer
63J4296	Harness, Personnel Parachute, Back PCU-3/P
64C43333	Strap-Assembly, Adjustment
7225267	Drop Line Assembly, Survival Kit, Automatic

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:42Z
Check the source to verify that this is the current version before use.

(Copies of specifications and standards required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 3951 Standard Practice for Commercial Packaging.

(Application for copies of ASTM publications should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pennsylvania 19103.)

2.2.1 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 First article. This specification makes provisions for first article testing.

3.2 Components. The survival kit container shall consist of the basic container, hardware, and subassemblies as shown on figure 1.

3.3 Selection of specifications and standards. Specifications and standards for necessary commodities and services not specified herein shall be selected in accordance with MIL-STD-143.

3.4 Materials and processes.

3.4.1 Metals. Metals shall be of the corrosion-resistant type or suitably treated to resist corrosion due to fuels, salt spray, or atmospheric conditions likely to be met in storage or normal service.

3.4.2 Dissimilar metals. Unless suitably protected against electrolytic corrosion, dissimilar metals shall not be used in intimate contact with each other. Dissimilar metals are defined in MIL-STD-889.

3.4.3 Nonmagnetic materials. Nonmagnetic materials shall be used for all components except where magnetic materials offer definite advantages.

3.4.4 Nonmetallic materials. The use of nonmetallic materials shall require approval by the procuring activity for the specific application involved.

3.4.4.1 Fiber glass. If fiber glass material is used in the construction of the basic container, it shall be manufactured in accordance with the requirements of MIL-P-9400. The material shall meet the physical requirements of Table I and workmanship requirements of L-P-383 when tested in accordance

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

with the applicable methods of FED-STD-406. Where grass cloth is used, it shall be preimpregnated cloth. Resins shall be in accordance with MIL-R-7575 or MIL-R-9300 for polyester and epoxy resins, respectively.

3.4.5 Fungus resistant material. Materials which are not susceptible to fungus attack shall be used to the greatest extent practicable. When materials are used that are susceptible to fungus attack, they shall be treated with a fungicidal agent.

3.4.6 Protective treatment. When materials are used in the construction of the basic container which are subject to deterioration when exposed to climatic and environmental conditions likely to occur during service usage, they shall be protected against such deterioration in a manner that will in no way prevent compliance with the performance requirements of this specification. The use of any protective coating that will crack, chip, or scale with age or extreme climatic and environmental conditions shall be avoided.

TABLE I. Physical Properties of Fiber Glass

Characteristic	Cloth	Mat and Roving
Flex strength, pounds per square inch (psi), minimum	60,000	32,000
Flex modulus, minimum	3.0×10^6	1.1×10^6
Tensile strength, psi, minimum	47,000	22,000
Compressive strength, psi, minimum	45,000	22,000
Moisture absorption, percent per 24 hours, maximum	0.5	1.0
Impact strength, unnotched foot-pounds per inch, minimum.	25	20

3.4.6.1 Aluminum parts. All aluminum parts shall be anodized in accordance with MIL-A-8625. All exposed parts shall be processed after anodizing with a potassium dichromate seal and dyed sage green, color No. 34092 of FED-STD-595.

3.4.6.2 Steel parts. All steel parts shall be cadmium or zinc plated in accordance with applicable specifications unless the part is made of corrosion-resisting steel or has been otherwise protected in accordance with MIL-S-5002.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:42Z
Check the source to verify that this is the current version before use.

3.4.7 Weights of materials. The components shall be made of the lightest possible materials consistent with configuration, strength, and other requirements specified herein.

3.5 Design and construction.

3.5.1 Survival kit container. The survival kit container shall incorporate the components listed on figure 1, shall meet the configuration requirements of the envelope shown on figure 2, and shall be designed to fit into the Martin Baker Aircraft Co., Ltd, Part No. MBEU 820 H7 ejection seat in the USAF F-4 aircraft. The container shall be designed to attach to the PCU-3/P personnel harness conforming to Drawing 63J4296 and remain with the user during ejection and descent. The container shall be equipped with hardware and cables for inflation of the life raft and attachment and separation of the container and life raft from the man under different conditions.

3.5.2 Operation. The survival kit container shall be designed to allow the following operations:

a. Normal egress from the aircraft after a flight, leaving the parachute and the container in the aircraft. Disconnection of the container shall be made at the parachute accessory rings.

b. Emergency egress from the aircraft on the ground or in the water, taking the parachute but leaving the container in the aircraft seat. Pulling the seat emergency harness release handle will release the man from the seat.

c. Ejection with subsequent manual or automatic release of the container from the man followed by inflation of the life raft. The raft and survival equipment shall be secured to the man by means of a dropline. This operation shall be accomplished in the following steps:

(1) Separation of the container from the seat shall automatically connect the dropline to the portion of the container hardware remaining attached to the personnel harness accessory ring after container deployment. Separation of the container from the seat will cause actuation of the seat sensing lanyard between the automatic actuator and the seat which will initiate the automatic actuator and cause container hardware operation unless the manual mode selection prevents operation. There shall be no possible interference due to snagging or jamming of the container with any parts of the seat.

(2) Automatic actuation or a manual pull of the container operating handle shall separate the container from the man and unlock the lid. The upper end of the dropline shall be retained with the personnel harness, the raft inflation system shall be actuated by dropline deployment, and the inner container and lower container shall be retained at the bottom of the dropline.

3.5.3 Basic container. The container shall provide a maximum interior volume consistent with the requirements specified herein. The lid shall have a separating hinge mechanism on the forward edge and two locking-type latches as required on each side. Where it is necessary to provide holes in the container, there shall be no interstices greater than 1/16 inch. This also

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:42Z
Check the source to verify that this is the current version before use.

applies to lid parting lines with the container packed with equipment. All mating edges of the container and the lid shall have aluminum extrusions. The container shall be built so that the parts will not work loose in service and shall withstand the strains, jars, and other conditions incident to shipping, storage, installation, and service without failure. The bottom of the container shall have an absorbent nonskid surface of rubberized cork, 1/16 inch thick. Recesses shall be allowed in the container for mounting external hardware flush with the container envelope. For compatibility with spacer blocks in the ejection seat, the perimeter of the lower 2 inches of the container shall be devoid of recesses and shall conform to the container envelope. Where a recess is unavoidable, as for mounting the arming device, an aluminum panel of .060-inch maximum thickness may be externally attached to the container to compensate for the recess. The top surface of the lid shall be contoured in accordance with figure 3 and furnished with cushion attachment provisions to mate with the cushion specified in 3.5.3.8. The container shall have four straps as described in 3.5.3.3 to hold the container to the seat during negative g maneuvers.

3.5.3.1 Lid mechanism. The lid locking latches shall be mechanically integral with the side attachment hardware releases. The mechanism shall open automatically when the operating handle is pulled. The lid retaining mechanism shall not permit the lid to separate from the container when an internal load of 700 pounds is applied to the lid. It shall not be possible to accidently open the lid during normal in-flight usage or during bailout. Where sandwich construction is used, plywood material shall not be used. The actuator, operating handle, and side locks shall incorporate lock indicators to show lock engagement.

* 3.5.3.2 Control cables. If used, control cables shall be fabricated of cable conforming to MIL-W-83420 and tested and prestretched in accordance with MIL-C-5688. Any control cable adjustments necessary for manufacturing shall be permanently locked after rigging. Lock wire is not considered adequate for this purpose. A maximum of one service adjustment provision for control cables shall be incorporated. The cables (maximum of two) shall be properly installed and enclosed in tubing conforming to MIL-T-8504 where necessary to prevent inadvertent actuation or damage by the contents or flexure of the container. Cable attachment provisions shall be incorporated into the hardware for the possible future installation of a control cable to operate a survival kit-to-man disconnect. All cables shall be properly guarded to prevent wearing or fraying during continued use of the container. Cables shall be installed in such a manner that the cable is never bent in a smaller radius than five times the nominal cable diameter.

3.5.3.3 Container-to-seat straps. The straps shall consist of a double thickness of nylon webbing conforming to MIL-W-4088, type 1, color sage green, and shall be constructed as shown on figure 4. The length of the straps shall be such that, with the forward straps attached to the leg restraint cord lock pins (part of seat) and the aft straps attached to the lap belt harness lugs (part of seat), the vertical container movement shall be not more than .38 inch at the front and .75 inch at the aft end. The straps shall be located approximately as shown on figure 2 using threaded fasteners with self-locking features. Each strap shall be capable of supporting a 100-pound static load

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

(applied between the container and the attachment ring) without permanent deformation of the attachment ring, pulling free from the container, or elongation of the strap which would cause the vertical movement of the container to exceed allowable limits.

3.5.3.4 Inner container. The inner container shall conform to material, performance and construction requirements of MIL-C-83864 and shall be designed to contain survival equipment packed to utilize the maximum available volume inside the survival kit container. Two each anchoring tapes, 10 inches in length and conforming to MIL-T-26089, shall be incorporated inside the inner container for attachment of survival equipment.

3.5.3.5 Inner container retention straps. Two each retention straps conforming to MIL-S-83862 shall be installed diagonally in the survival kit container to retain the inner container after deployment and during parachute descent.

3.5.3.6 Raft retainer. A raft retainer conforming to Drawing 62E4336 shall be furnished with each survival kit container.

3.5.3.7 Dropline. The survival kit container shall be provided with a dropline assembly conforming to Drawing 7225267-10 that will retain the inner container (packed with 35 pounds of survival equipment) and an inflated LRU-16/P one-man life raft (per MIL-L-83491) to the individual when the survival container is deployed during parachute descent. One end (link attach point) of the dropline shall be attached to the dropline link (figure 5). The dropline shall be routed under the lid, through lid and container mating extrusions, and the distal end shall be attached to the inner surface of the aft wall of the container by suitable hardware. The main lid attach loop on the dropline shall be attached to the inner side of the lid to prevent deployment of the dropline out of the dropline retainers until the lid is opened and shall cause separation of the lid from the container during deployment. The dropline retainers shall be attached to the inside of the lid by means of four 2-inch squares of tape conforming to MIL-F-21840.

3.5.3.8 Cushion. The cushion shall be equal to and interchangeable with the Part Numbers 140263-1 filler, cushion and 140262-3 cover, H. Koch & Sons, Inc., Anaheim, California.

3.5.4 Hardware. The hardware shall consist of three main assemblies: operating handle, container hardware, and automatic actuator. Other hardware shall be as specified herein. All hardware which could come in contact with the raft and inner container during operation in accordance with 4.6.4 shall be smooth and free of sharp edges or protrusions. Decals shall be used where necessary to show operation and maintenance procedures.

3.5.4.1 Operating handle.

3.5.4.1.1 Location. The operating handle shall be located on the right side of the container in front of the container hardware. The handle shall not extend past the front of the container, and the front of the handle shall not be located more than 2 inches from the front. It shall be in an easily accessible position both during flight and while the man is suspended in the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

parachute harness. The location shall not cause uncomfortable pressure points. Provisions shall be incorporated for lock wiring the handle to the lower container.

3.5.4.1.2 Design functions. The operating handle shall be so designed and connected that a pull of not more than 4 inches on the handle shall cause the container lid to unlock and cause separation of the necessary components of the container hardware. When the handle is pulled while the container is in the seat, the dropline shall be connected to the portion of the container hardware remaining with the container. The handle shall be closed at both ends so that it shall not be possible to catch or snag parachute lines, clothing, or straps on or under the handle. The handle shall have a trigger lock on the underside. The handle shall be lusterless yellow conforming to color No. 33538 of FED-STD-595 and shall have embossed black letters on the top that read EMERGENCY RELEASE. The handle shall have a flexible closed loop grip. The handle loop shall have interior dimensions of 3-1/4 $\pm$ 1/16 inches height by 4 $\pm$ 1/16 inches maximum depth.

3.5.4.1.3 Operating force. The operating handle shall unlock with a pull of 20 $\pm$ 5 pounds. After unlocking the handle, it shall require a maximum pull of 15 pounds to free the handle from the container when the container is out of the seat and a maximum pull of 15 pounds when the container is in the seat. The loads shall be applied 2 inches from the forward end of the handle and shall move through the arc of the handle travel.

3.5.4.2 Container hardware.

3.5.4.2.1 Design. The container hardware shall be in accordance with figure 5 and shall have a quick-adjustable, spring-loaded, friction-type adjuster, located at the upper section, that will accept two thicknesses of webbing conforming to type VI of MIL-W-4088, color sage green. The top of the adjuster shall not extend more than 1 inch above the top surface of the lid. The adjuster shall operate with reasonable ease to take up all slack in the linkage to provide safe retention of the container during bailout or ejection procedures. The container hardware shall be so designed that when the operating handle is pulled, the locks will remain in the open position and the mating units at the hardware cannot be relocked until the handle is re-engaged on the container or until a secondary operation is performed. The slider part of the adjuster shall have grips to provide easier loosening of the webbing while the survival kit container is in the ejection seat. A visual indicator shall be incorporated for inspection of secure interlock engagement of the side hardware.

3.5.4.2.2 Functions. The survival kit container hardware system shall accomplish the following actions:

a. Separate the container from the man (both during parachute descent and during emergency escape on the ground).

b. Open the lid locks (during parachute descent and during escape on the ground).

c. Actuate the life raft by dropline deployment (during parachute descent only).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

d. Couple the dropline to the parachute harness attaching hardware (during parachute descent) and separate the dropline (during the escape on the ground) as required.

The system shall be designed so that certain functions occur when the operating handle is pulled or the automatic actuator operates during parachute descent, and different functions occur when the handle is pulled for emergency escape on the ground. This shall be accomplished by means of an automatic plunger-type arming device located against the side of the container so as to bear against the bottom of the ejection seat pan. While the container is in the ejection seat (unarmed condition), the plunger is depressed into its housing. After the container separates from the ejection seat (armed condition), the plunger extends. Arming of the container by this plunger action shall couple the dropline to the man's parachute harness.

3.5.4.2.3 Adjustment strap assembly. The adjustment strap assembly shall conform to Drawing 64C43333 except that sage green webbing in accordance with MIL-W-4088, type VI, condition U shall be used and the strap length shall be in accordance with figure 5. The webbing end stop may be furnished in any suitable design which will prevent pulling of the webbing end through the adjuster and snagging on the seat, but which will permit easy removal and replacement of the adjuster strap assembly. Sticker clip straps, consisting of the same material, shall be added in accordance with figure 5 to the adjustment strap assemblies for sticker clip attachment to the ejection seat. The sticker clip straps shall be looped around the adjustment strap and shall slide freely. Strap ends shall be seared to prevent fraying.

3.5.4.2.4 Dropline connecting device. The plunger-type dropline connecting device shall operate from the weight of the survival container when it is placed flat against the bottom of the ejection seat pan. The plunger, when extended, shall be capable of withstanding a force of 200 pounds in any horizontal direction without damage. The plunger, when free, shall extend 1-1/8 ($\pm$1/8) inches from the bottom of the container, and actual arming and disarming shall occur while the plunger is extended in the range of 3/4 ($\pm$1/8) inches from the bottom of the container. Alternate configurations will be considered for approval by the procuring activity provided the functional and performance requirements of this specification are met. The plunger shall be an integral part of the side release hardware so that no cable linkages required.

3.5.4.3 Automatic actuator.

3.5.4.3.1 Actuator. The actuator shall be designed as a cartridge actuated device in accordance with MIL-C-83124. There shall be no exposed moving parts or parts that will work loose in service. The actuator shall have the appropriate hardware installed on the container so that the functions of 3.5.2 can be accomplished. The entire actuator shall mount on the container exterior, but shall not exceed the outside envelope of the container. The size of the actuator in overall dimensions, including associated hardware, shall not exceed 20 cubic inches. Any interconnections or actuation functions between the container, actuator, aircrewman, parachute and/or ejection seat shall not compromise the reliability, safety or effectivity of any of these elements during normal or emergency operating conditions. The manual release handle shall remain locked in place during automatic actuator operation.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:42Z
Check the source to verify that this is the current version before use.

3.5.4.3.2 Seat separation sensor. The seat separation sensor shall release the actuator firing pin to fire the cartridge after the survival kit container has separated from the ejection seat pan by a distance of approximately 30 inches. The sensor device shall stow within the maximum envelope of the survival kit container and shall resist the effects wear or interference so that unscheduled actuation or failure shall not occur. The sensor shall operate and separate from the container with a maximum force of 10 pounds applied in any direction upon the distal end of the sensor lanyard. The sensor lanyard shall terminate with a one inch inner diameter corrosion resistant steel ring made of 0.11 $\pm$ .02 inch diameter round wire. It shall not be possible to install the sensor into the actuator if the actuator has been operated.

3.5.4.3.3 Cartridge. A 4-second (plus or minus 1-second) time delay, percussion-type expansible, closed system cartridge (a cartridge that deforms but does not rupture upon firing) shall be used to provide the power to operate the survival container hardware.

a. The cartridge firing pin shall be locked in the uncocked position to preclude unscheduled firings.

b. There shall be an external visual indicator to show cartridge installation.

c. There shall be an external visual indicator to show a fired cartridge.

d. There shall be an external visual indicator to show the setting of the firing pin.

e. The cartridge and chamber shall be designed to prevent improper installation of the cartridge.

3.5.4.3.4 Mode selector. A mode selector mechanism shall provide the crewmember with in-flight selection of either automatic or manual operation of the survival kit container for ejection or bailout. The selector shall also act as a safety device during ground handling of the container. The selector shall incorporate a lever located on the right front corner of the container in a readily accessible position to the crewmember that is compatible with the crew station and ejection seat. The selector lever shall move through a vertical plane with the upward position for automatic actuation and the downward position for manual operation. The lever shall be constructed so that the crewmember can detect the position by feel (while wearing flight gloves) and it shall be detented in either position to prevent accidental movement by acceleration, windblast, or "G" forces. A force of not less than 5 pounds nor more than 10 pounds shall be required to move the lever out of the detent. The positions of the lever shall be labeled "Auto" and "Manual" in permanent, contrasting colors with block lettering not less than 3/16 inch high to describe the settings for the aircrew member and maintenance personnel.

Source: https://assist.dla.mil -- Downloaded: 20260-26T04:42Z
Check the source to verify that this is the current version before use.

3.5.5 Reliability. The survival container operating hardware shall have a mean-cycle-between-failures (MCBF) of 100 cycles with a minimum reliability of .9997 at a 90 per cent confidence level. This reliability shall be achieved through redundancy of the automatic and manual modes of operation which shall have demonstrated reliabilities of .97 and .99, respectively. A cycle shall consist of one operation as described in 4.6.4. The performance requirements stated in 3.6.2 shall be met and the accept-reject criteria of Table III shall apply.

TABLE III. Reliability Accept-Reject Criteria

Minimum Test Cycles for Acceptance	Allowable Number of Failures
240	0
390	1
530	2
670	3

3.5.5.1 Reliability acceptance. At the option of the procuring activity, direction may be given after one failure to either continue or repeat the test.

3.5.6 Longevity. The survival kit container shall have a service operating life span of not less than 300 cycles in the manual mode before wearout failures occur or the hardware consistently fails to meet the specified MCBF index. Parts requiring removal and replacement within this cyclic test and the cycles of normal operation of removed parts shall be recorded by the contractor.

3.5.7 Maintainability. The survival kit container shall be designed and fabricated as specified herein to provide:

a. Minimum possible corrective maintenance time consistent with reliability and performance requirements.

b. Minimum number of parts consistent with performance requirements.

c. Minimum amount of training and time necessary for assembly, disassembly, location of trouble sources, and maintenance including servicing.

d. Positioning for rapid and easy access for inspection and replacement of any potential failure and excessive wear points.

e. Minimum disturbance to other equipment parts or components during adjustments, servicing, replacement of parts and components, and other allowable maintenance. In performing maintenance, if engineering reasoning or data determines that physical or visual interference between items cannot be avoided, the item predicted to require the most maintenance shall be located for best accessibility.

f. Contractor recommendations for preventive maintenance shall be made based on a minimum number of general purpose tools and equipment normally available commercially. Use of special purpose tools and equipment shall be subject to approval by the procuring activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

3.5.7.1 Maintainability acceptance. Any excessive maintenance operations or times noted during the tests of 4.6.5 which result from unsatisfactory design of components shall require a redesign of those components by the contractor.

3.5.8 Welding. Welding shall be accomplished in accordance with MIL-W-8611 or MIL-W-6858, or both.

3.5.9 Castings. Castings shall be designed and inspected in accordance with MIL-C-6021. Castings shall not be used in applications where failure could result in loss of the container during ejection and descent.

3.5.10 Safetying. All threaded parts shall be positively locked by self-locking nuts, or any other approved methods. Safety wiring is not considered an approved method.

3.5.11 Swaging. Swaging shall be done in accordance with MIL-T-6117 and shall be carefully performed. Each swaging operation shall be proof tested to 100 pounds or 3 times the maximum service load, whichever is greater.

3.6 Performance.

3.6.1 Ejection seat operation. When tested as specified in 4.6.2, the container assembly shall arm when separated from the seat and the seat separation sensor shall operate and separate from automatic actuator. There shall be no separation or flailing of components that could endanger the crewmember. The automatic actuator shall operate the container hardware per 3.5.2.c within the time specified in 3.5.4.3.3.

3.6.2 Hardware operation. When tested per 4.6.3, the hardware shall perform the functions described in 3.5.4.2.2. The handle operating force in the "manual" mode shall not exceed the limits specified in 3.5.4.1.3 except that when subjected to the tests of 4.6.7, the operating force shall not exceed 30 pounds, or 40 pounds when tested per 4.6.9.1.1. The operating handle shall separate completely from the container when the maximum force is applied in the tests of 4.6.3.1 and 4.6.3.2. The seat separation sensor shall operate and separate from the automatic actuator in the parachute descent and automatic tests of 4.6.3.1 and 4.6.3.3 by a force not to exceed 10 pounds. The automatic actuator shall operate the container hardware per 3.5.2.c within the time specified in 3.5.4.3.3 and the operating handle shall remain in the locked position during the automatic operation test of 4.6.3.3.

3.6.3 Environmental conditions.

3.6.3.1 The container shall operate satisfactorily under the following environmental conditions when subjected to the referenced test methods as specified in 4.6.7:

a. High temperature operation at 160°F-method 501, procedure I of MIL-STD-810.

b. Temperature shock-method 503 of MIL-STD-810

c. Low temperature operation at -65°F-method 502 of MIL-STD-810.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:42Z
Check the source to verify that this is the current version before use.

d. Sand and dust-method 510 of MIL-STD-810

e. Humidity-method 507, procedure I of MIL-STD-810

f. Salt fog-method 509 of MIL-STD-810

g. Shock-method 516, procedure III, of MIL-STD-810

h. Fungus-method 508 of MIL-STD-810

3.6.3.2 Vibration. The hardware shall operate satisfactorily when the container is subjected to vibration conditions as specified in 4.6.7.7.

3.6.4 Simulated parachute deployment. The container shall withstand a force of at least 30g (peak) and a minimum rate of increase of 500g per second, as recorded between the webbing assembly and drop cable, when tested in accordance with 4.6.8.

3.6.5 Operation in water. The container shall operate satisfactorily when tested as specified in 4.6.6. Any hangup or malfunction shall be cause for rejection and consideration for redesign.

3.6.6 Static loads.

3.6.6.1 Container-to-parachute hardware. The container-to-parachute shall show no evidence of damage or permanent deformation and shall operate satisfactorily when tested per 4.6.3.1 after a proof load of 1400 pounds is applied per 4.6.9.1. The hardware shall also withstand an ultimate load of 2100 pounds without structural failure when tested per 4.6.9.1. Distortion shall be permitted after the load is relieved and the hardware shall operate satisfactorily when tested per 4.6.3.1 and 4.6.3.2.

3.6.6.2 Container (seating section). The container shall show no evidence of structural failure or permanent deformation and the hardware shall operate satisfactorily when tested per 4.6.3.1 after a proof load of 5200 pounds is applied to the container seating section per 4.6.9.2. The container shall also withstand an ultimate load of 7200 pounds without functional failure when tested per 4.6.9.2. Distortion and warpage shall be permitted after the load is relieved and the container hardware shall operate satisfactorily when subjected to the manual mode tests of 4.6.3.

3.6.6.3 Lid retention. The lid shall not separate from the container when load of 700 pounds is applied as specified in 4.6.9.3. There shall be no evidence of distortion or failure of the lid lock and the container shall operate satisfactorily when tested per 4.6.3.1 and 4.6.3.2.

3.6.6.4 Handle. The operating handle shall show no evidence of permanent deformation or damage after a load of 500 pounds has been applied per 4.6.9.4.

3.6.6.5 Handle lock. The operating handle or lock shall show no evidence of damage or distortion after a load of 200 pounds has been applied in accordance with 4.6.9.5.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:42Z
Check the source to verify that this is the current version before use.

3.6.6.6 Dropline connecting plunger. After a load of 200 pounds has been applied per 4.6.9.6, the dropline connecting plunger shall show no evidence of distortion or damage and shall operate freely when the container is tested in accordance with 4.6.3.1 and 4.6.3.2.

3.6.7 Wind blast. The container shall withstand a windblast of 660 knots when tested as specified in 4.6.10 and shall show no evidence of distortion. The lid shall not separate from the container and the operating handle shall remain in the locked position.

3.6.8 Adjuster. The adjuster shall not slip more than one-half inch after the application of 90 cycles when tested as specified in 4.6.11.1 and shall completely release when a force of 30 pounds or less is applied to the cage assembly per 4.6.11.2.

3.6.9 Interchangeability. All critical parts such as lids, cushions, operating handles and container-to-parachute hardware shall be interchangeable in accordance with MIL-I-8500 when tested per 4.6.12.

3.6.10 Container material. If the basic container is constructed of fiber glass, the container material shall meet or exceed the requirements of 3.4.4.1 when tested in accordance with 4.6.13.

3.6.11 Magnetic interference. The container shall not deflect a pilot's standby compass (MS17983 or equivalent) more than 3 degrees when tested as specified in 4.6.14.

* 3.7 Threads. Except for permanently installed pipe threaded plugs, or as necessitated by functional purposes and unless otherwise specified in the applicable documents, only straight threads conforming to FED STD H-28, National Fine Thread Series, class 3(NF-3) or Unified Thread Series, class 3A or 3B, shall be used.

* 3.8 Part numbering of interchangeable parts. All parts having the same manufacturer's part number shall be functionally and dimensionally interchangeable. The item identification and part number requirements of DOD-STD-100 shall govern the manufacturer's part number and changes thereto.

3.9 Weight. The weight of the survival kit container, including all components listed on figure 1, shall not exceed 23 pounds.

3.10 Color. The basic container color shall be sage green color No. 34092 in accordance with FED-STD-595. If material is molded fiber glass, the glass fibers shall not be considered a part of the color.

3.11 Identification of product. Equipment, assemblies, and parts shall be marked for identification in accordance with MIL-STD-130.

3.11.1 Tag. A metal tag, stamped or etched with the following information, shall be securely wired to the container. The tag shall be 3-1/2 inches long by 3/4 inch wide by 1/32 inch thick, with rounded corners.

Warning: This container assembly is not complete until survival equipment has been added in accordance with T.O. 14S1-3-51.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

3.12 Workmanship. The survival kit container shall be made in accordance with the best shop practices for this type of equipment. The container shall be free of defects, burrs, sharp edges, rough grinding marks, and uneven surfaces due to forming operations. Particular attention shall be paid to accuracy of dimensions; radii of fillets; marking of parts and assemblies; thoroughness of welding, brazing, painting, riveting, swaging, soldering, potting, alignment of parts, tightness of assembly screws and bolts; et cetera. Fiber glass reinforced plastic materials shall be free of excessive resin buildup, inconsistency of glass fibers, wrinkles, blisters, cracks, starved areas, air bubbles, tackiness, gaps, foreign objects, and laps. All interior and exterior surfaces of the container shall be smooth, consistent with other requirements of this specification, to avoid sharp protrusions which might tear, cut, or puncture the contents of the container during and after its first operation. Welding, riveting, or other permanent methods of assembly may be used provided that disassembly or reassembly of the component for inspection or overhaul purposes may be accomplished rapidly, safely, and without damage to the assembly. Operation after assembly shall not be dependent upon selective fit of any or all component parts.

3.12.1 Riveting. Riveting operations shall be carefully performed to ensure that the rivets are tight and satisfactorily headed.

3.12.2 Cleaning. The container shall be thoroughly cleaned. All oils and foreign materials which might adversely affect the operation or survival equipment with which it comes in contact shall be removed during and after final assembly.

3.12.3 Protection. The container shall be protected against the entry of all foreign materials.

3.12.4 Lubrication. Permanent type lubrication which will last the expected life of the container and which meets with procuring activity approval shall be used.

3.12.5 Castings. Castings shall be of high quality, clean, sound, free of holes, porosity, cracks, and any other defects.

3.12.6 Welding. Welding shall be carefully performed to ensure that all welding joints have proper penetration, proper bead, and proper strength.

3.12.7 Alignment. The alignment of fitting and mating surfaces shall be accurate to a degree that will permit the proper functioning of the unit within the environmental conditions expected during the service life of the unit.

3.12.8 Screw assemblies. Assembly screws and bolts shall be tight. The word "tight" means that the screw or bolt cannot be appreciably tightened further without damage or distortion to the screw, bolt, nut, or components being secured by the screw or bolt.

3.12.9 Soldering and brazing. Soldering and brazing shall be done in accordance with current applicable specifications and shall be carefully performed to ensure that all joints have proper penetration, proper bead, and proper strength.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:42Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspections. The inspection and testing of survival kit containers shall be classified as follows:

a. First Article inspections

b. Quality conformance inspections

4.3 First Article Inspection.

4.3.1 First Article test samples. The contractor shall subject four survival kit containers to the First Article tests specified in 4.3.3.

4.3.2 First Article samples for the procuring activity. The contractor shall submit two first article samples to the procuring activity. Samples tested by the contractor may be submitted.

4.3.3 First Article tests. The First Article tests shall consist of all the tests described under 4.6.

4.4 Test conditions.

4.4.1 Atmospheric conditions. Unless otherwise specified, all tests required by this specification shall be made at an atmospheric pressure of 28 to 32 inches of mercury, a temperature of 77° ± 18°F, and a relative humidity of 80 percent or less. Where tests are made with atmospheric pressure or temperature substantially different from the above values, proper allowance shall be made for the change in instrument reading.

4.4.2 Test attitude. Unless otherwise specified, the unit shall be tested in the normal operating attitude.

4.4.3 Sequence of tests. First Article tests shall be conducted in the following sequence:

a. Examination of product

b. Environmental tests

c. Other tests

In lieu of the static tests, sled tests conducted in accordance with MIL-STD-846 may be used, if approved by the procuring activity. If sled tests are utilized, the contractor shall notify the procuring activity and outline the reasons for making this request.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

4.5 Acceptance inspection. Acceptance inspections shall consist of:

a. Individual tests

b. Sampling plans and tests

4.5.1 Individual tests. Each container shall be subjected to the following tests as described under 4.6:

a. Examination of product (4.6.1)

b. Hardware operation (4.6.3.1, 5 cycles and 4.6.3.2, 10 cycles)

4.5.2 Sampling plans and tests.

4.5.2.1 Lot. A lot shall consist of 100 containers, or fraction thereof, manufactured under essentially the same conditions and submitted for inspection at substantially the same time.

4.5.2.2 Sampling plan A. Four containers shall be selected at random from each lot, or fraction thereof, and subjected to the following tests as described under 4.6:

a. Interchangeability of critical parts (4.6.12)

b. Proof loads (4.6.9.1 and 4.6.9.2)

4.5.2.2.1 After completion of the tests, the containers shall be reconditioned, as required, for delivery as serviceable items.

4.5.2.3 Sampling plan B. One container shall be selected at random from each lot, or fraction thereof (up to a maximum of four containers per contract or purchase order) and subjected to the following tests as described under 4.6:

a. Lid retention (4.6.9.3)

b. Container material (4.6.13)

4.5.2.4 Rejection and retest. When one or more items from a lot fail to meet the tests of sampling plans A and B, acceptance of all items in the lot shall be withheld until the extent and cause of failure have been determined. The contractor shall explain fully to the Government representative the cause of failure and the action taken to preclude recurrence. After correction, all of the sampling tests shall be repeated.

4.5.2.4.1 Individual tests may continue. For production reasons, individual tests or other sampling plans may be continued pending the investigation of a sampling test failure. But final acceptance of the entire lot or lots produced later shall not be made until it is determined that all items meet all requirements of the specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

4.5.2.5 Defects in items already accepted. The investigation of a test failure could indicate that defects may exist in items already accepted. If so, the contractor shall fully advise the procuring activity of all the defects likely to be found and the method of correcting them.

4.6 Test methods.

4.6.1 Examination of product. The survival kit container shall be examined visually to determine that it meets the workmanship, identification, marking, finish, material, and weight requirements of this specification.

4.6.2 Ejection seat operation. System integration tests shall be conducted in accordance with MIL-STD-846. A test subject completely dressed with the applicable personal equipment shall operate the packed container for normal and emergency operation in the ejection seat. The mode selector shall be placed in the "Auto" position. The container assembly shall meet the requirements of 3.6.1.

4.6.3 Hardware operation. Hardware shall be tested under the following simulated conditions.

4.6.3.1 Parachute descent. The mode selector shall be placed in the "Manual" position. The seat separation sensor shall be operated and the dropline connecting plunger shall be extended to simulate seat separation. An empty carbon dioxide cylinder shall be used for this test. An internal upward force of 50 pounds shall be applied to the center of the container lid. A 25-pound upward force at 30° aft of normal to the top of the main compartment lid shall be applied at both sides of the container through each unit of the container-to-parachute hardware. The operating handle shall be unlocked and pulled with a force applied per 3.5.4.1.3. The container shall comply with the requirements of 3.6.2.

4.6.3.2 Emergency ground escape. The dropline connecting plunger shall be depressed to simulate installation in an ejection seat. The mode selector shall be placed in the "Manual" position. A load of 15 pounds shall be applied vertically through the container-to-parachute hardware and 50-pound internal upward force shall be applied to the center of container lid. The operating handle shall be unlocked and pulled within a force applied per 3.5.4.1.3. The container shall meet the requirements of 3.6.2.

4.6.3.3 Automatic operation. The mode selector shall be placed in the "Auto" position. A 50-pound upward internal force shall be applied to the container lid and an upward 25-pound force, directed 30° aft of normal to the top of the container lid, shall be applied to each of the container-to-parachute hardware attachment snaps. The dropline connecting plunger shall be extended and the seat separation sensor shall be operated and separated from the container to simulate seat separation. The container hardware shall meet the operating requirements of 3.6.2.

4.6.4 Reliability. The reliability requirements of 3.5.5 shall be demonstrated by this test.

4.6.4.1 Manual operation. Two survival kit containers (test units 1 and 2) shall be subjected to the tests scheduled in Table IV for a minimum of 240 consecutive successful cycles. The containers shall be loaded and operated as

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

specified in 4.6.3.1. No parts may be replaced as preventive maintenance during reliability testing. A successful cycle shall consist of the following events.

a. The dropline connecting plunger shall be released from the depressed position and shall extend to full length.

b. The seat separation sensor shall be fully extended and then be operated and separated from the automatic actuator without firing the cartridge or operating the actuator.

c. The operating handle shall be unlocked and operated and shall separate from the container.

d. Simultaneously with handle separation, the lid locks shall disengage, the lid shall open and the container-to-parachute hardware shall separate from the container.

e. The dropline shall be locked to the container-to-parachute hardware.

4.6.4.2 Automatic operation. The reliability of the automatic actuator shall be in accordance with MIL-C-83124 and shall be demonstrated during the tests specified therein. In addition, one survival kit container (test unit 3) shall be subjected to the tests scheduled in Table IV for 14 consecutive successful cycles. The container shall be loaded and operated per 4.6.3.3. A successful cycle is defined by the occurrence of the following events.

a. The dropline connecting plunger shall be released from the depressed position and shall extend to full length.

b. The seat separation sensor shall be fully extended and then be operated and separated from the actuator to fire the cartridge.

c. After the specified time delay, the lid locks shall disengage, the lid shall open and the container-to-parachute hardware shall separate from the container.

d. The operating handle shall remain in the locked position.

e. The dropline shall be locked to the container-to-parachute hardware.

TABLE IV. Distribution of Reliability Test Cycles

Tests	Test Unit 1	2	3
Sand and Dust (4.6.7.4)		20	1 1/
Humidity (4.6.7.5)		20	1 1/
Salt Fog (4.6.7.6)		20	1 1/
Vibration (4.6.7.7)		20	1 1/
Parachute Descent (4.6.3.1)	160		
Automatic Operation (4.6.3.3)			10

1/ Denotes exposure to an environmental test with one automatic operation per 4.6.3.3 after the test and reconditioning before exposure to the next test.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:42Z
Check the source to verify that this is the current version before use.

4.6.4.3 Longevity. Two survival kit containers (test units 1 and 3 of Table IV) shall be continued through a longevity test after completion of the reliability test. One of the containers shall be operated for 240 cycles in accordance with 4.6.3.1 and the other container shall be subjected to 240 cycles per 4.6.3.2. No cable adjustments shall be made or required during this test. Acceptance will be judged on the basis of 3.5.6 and Table III.

4.6.5 Maintainability verification. Maintenance tasks shall be performed or simulated. The maintenance tasks considered shall be only those related to field level maintenance. All maintenance tasks shall be conducted by personnel representative of the skill levels expected at field level. The time to accomplish each maintenance task shall include time for preparation, recognition, fault location, removal (based only on the installation provisions of the item), fault correction, adjustment and realignment, final test, and replacement but shall exclude supply time and administrative time. The actual active maintenance times, exclusive of administrative time such as obtaining spare parts or completing records, shall be recorded and analyzed in sufficient detail to yield values suitable for requirements appropriate to production items. In the case of repetitive subtasks which occur due to the nature of similar failure modes (e.g., removal), it shall not be necessary to perform repetitive time studies. The tools and facilities required in the maintenance actions shall be recorded and related to production item requirements. Acceptance will be based on the criteria expressed in 3.5.7.1.

4.6.6 Water test. While in the water and while wearing the parachute harness and survival container, the test subject shall pull the container operating handle. The container shall separate from the subject and the dropline shall be retained to the parachute. This test shall be repeated for a total of five times. The raft shall be inflated each time by a jerk of the dropline. The container shall comply with the requirements of 3.6.5.

4.6.7 Environmental tests.

4.6.7.1 High temperature operation. The container shall be subjected to high temperature procedures as specified in method 501, procedure I of MIL-STD-810. While at high temperature, the hardware shall be subjected to the tests of 4.6.3.1 and 4.6.3.2 and shall meet the requirements of 3.6.2.

4.6.7.2 Temperature shock. The container shall be subjected to the temperature shock test specified in method 503 of MIL-STD-810. At the end of the specified period, the container shall be returned to room temperature, operated per 4.6.3.1 and 4.6.3.2, inspected for signs of deterioration and damage in accordance with 4.6.1 and shall comply with the requirements of 3.6.2.

4.6.7.3 Low temperature operation. The container shall be subjected to the low temperature procedures as specified in method 502 of MIL-STD-810. While at the low temperature, the hardware shall be subjected to the tests 4.6.3.1 and 4.6.3.2 and shall comply with 3.6.2.

4.6.7.4 Sand and dust. The complete container with CO_2 cylinder, raft, and simulated survival equipment shall be subjected to sand and dust tests in accordance with method 510 of MIL-STD-810. At the end of the first 6-hour test period, step 1, the orientation of the container shall be changed to another vulnerable position relative to the dust stream. After this test, the container shall be subjected to the test scheduled in Table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

4.6.7.5 Humidity. The complete container shall be subjected to the humidity test as specified in method 507, procedure I of MIL-STD-810, for not less than 120 hours, and shall then be subjected to the test scheduled in Table IV.

4.6.7.6 Salt fog. The container shall be subjected to the salt fog test in accordance with method 509 of MIL-STD-810. After the test, the container shall be tested per the schedule in Table IV.

4.6.7.7 Vibration. The complete survival kit container shall be mounted on a vibration stand for 6 hours on each of the three axes, two horizontal and one vertical, operating at a frequency ranging from 5 to 500 Hertz with a double amplitude displacement not to exceed 0.036 inch and a vibratory acceleration not to exceed plus or minus 10 g. The container shall be strapped tightly to the vibration table with the 1-3/4 inch cotton or dacron webbing. After the vibration test, the container shall be subjected to the test scheduled in Table IV.

4.6.7.8 Shock. The survival kit container shall be subjected to the shock test specified in method 516, procedures I and III, amplitude "a" and duration "c" of MIL-STD-810. The container shall then be subjected to the tests of 4.6.3.1 and 4.3.6.2 and meet the requirements of 3.6.2.

4.6.7.9 Fungus resistance. The container and the hardware shall be tested for fungus resistance in accordance with method 508 of MIL-STD-810. Any growth shall constitute rejection.

4.6.8 Drop test. The container with life raft, charged CO_2 cylinder, and valve assembly installed shall be subjected to simulated parachute opening shock by means of the drop test. The drop test shall consist of dropping the loaded container to the end of the suspension assembly of such height and elasticity as to give the required shock. The container shall be loaded with ballast, simulating survival equipment, to achieve a total weight of 50 pounds. The loaded container shall be secured at the parachute attaching hardware on both sides to a webbing assembly (simulating the parachute harness) which, in turn, is attached to a drop cable. The length and elasticity of the drop system shall be such as to achieve the force specified in 3.6.4. Following this test, the survival kit container shall be subjected to the tests of 4.6.3.1 and 4.6.3.2 and meet the requirements of 3.6.2.

4.6.9 Static loads.

4.6.9.1 Container-to-parachute hardware. The container-to-parachute hardware and the container section to which it is attached shall be subjected to proof and ultimate loads specified in 3.6.6.1 for each side. The proof loads shall be applied in segments of 45° in a 30° cone about each attachment. Ultimate loads shall be applied to each attachment in the outboard segment only. The container shall be tested per 4.6.3.1 after each application of load and shall comply with the requirements of 3.6.6.1.

4.6.9.1.1 A load of 100 pounds shall be applied to the container-to-parachute hardware at a 30° angle forward, then aft, and then sideward for each side. The operating handle shall be operated once during each application of load (4 times, total) and the container hardware shall meet the requirements specified in 3.6.2.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:42Z
Check the source to verify that this is the currentversion before use.

4.6.9.2 Container (seating section). The container shall be placed in the compression tester with top surface of the lid horizontal so the load will be applied vertically to the lid surface. A compression test form, consisting of a hard rubber block contoured to mate with the lid and having an outline as described in figure 6, shall be placed on the container lid and oriented to the ischial tuberosity points as shown in figure 2. Compression loads specified in 3.6.6.2 shall be applied to the test form for a period of 2 seconds minimum. After application and relief of each load, the container shall be subjected to the tests 4.6.3.1 and 4.6.3.2 and pass the requirements of 3.6.6.2.

4.6.9.3 Lid retention. The lid shall be subjected to the load specified in 3.6.6.3 in an upward direction normal to the upper surface of the lid at the center. The test shall be repeated with the load applied 3 inches to the right of the center point and then 3 inches to the left of the center point. The load shall be applied to a cable or webbing threaded through a hole or slot in the lid and attached to a 6-inch diameter metal plate which bears against the underside of the lid. The container and lid shall comply with the requirements of 3.6.6.3.

4.6.9.4 Handle. The operating handle shall be installed on the container in the normal locked position and the load specified in 3.6.6.4 shall be applied in an outward direction parallel to the surface of the lid to the top of the rigid portion at the front end of the handle for a minimum period of 10 seconds. The handle shall pass the requirements of 3.6.6.4.

4.6.9.5 Handle lock. A tension load as specified in 3.6.6.5 shall be applied for a minimum period of 10 seconds to the forward end of the grip of the handle normal to the surface of the lid. The handle or lock shall comply with the requirements specified in 3.6.6.5.

4.6.9.6 Dropline connecting plunger. The load stated in 3.6.6.6 shall be applied to the lowest point of the dropline connecting plunger while in the fully extended position in the fore, aft, and both side directions. After application and removal of the load in each of the directions specified, the container shall be tested per 4.6.3.1 and 4.6.3.2 and pass the requirements of 3.6.6.6.

4.6.10 Wind blast. The survival kit container shall be placed in a simulated Martin Baker Aircraft Co. Part No. MBEU 820 H7 ejection seat bucket and shall be attached to a PCU-3/P personnel harness being worn by a 95th percentile anthorpometric dummy. The container shall be subjected to a windblast of 660 knots at sea level or equivalent. The wind tunnel shall be equipped with a deflector and shutoff so that the rate of onset of the windblast is not more than 0.12 second. Shutoff of the blast shall start immediately after the deflector is in an open position. Decay shall occur in not less than 1 second. The container shall meet the requirements of 3.6.7 and shall then be tested per 4.6.3.1 and 4.6.3.2.

4.6.10.1 Windblast tests may be conducted in conjunction with ejection seat survival kit container separation tests at the maximum speed specified in MIL-STD-846.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:42Z
Check the source to verify that this is the currentversion before use.

4.6.11 Adjuster.

4.6.11.1 Adjuster creep. An alternating load-no-load cycle shall be applied in each of three directions: normal, and 30° to each side of the container hardware. The loads shall be 20 pounds and 0 pound for 30 cycles at a stroke of at least 3/4 inch. The test shall be started by pulling the webbing through the adjuster to eliminate any set in the webbing or false load of the spring-loaded slider. The adjuster shall meet the requirements of 3.6.8.

4.6.11.2 Release of adjuster. With an initial load of 20 pounds of tension in the attachment webbing, the adjuster shall be inspected for slippage of the webbing when a load required by 3.6.8 is applied to the cage assembly. The release shall be accomplished without exceeding an adjuster envelope thickness of 7/8 inch including webbing. The adjuster shall release per the requirements of 3.6.8.

4.6.12 Interchangeability of critical parts. Functional interchangeability of lid, operating handles, and container attaching hardware shall be tested by interchanging each item on four containers and actuated in accordance with 4.6.3.1 and 4.6.3.2. The requirements of 3.6.9 shall be met.

4.6.13 Container material. If the container is made of fiber glass material, before installation of any hardware, the molded container case shall be tested in accordance with FED-STD-406 to determine compliance with requirements of 3.6.10. Four coupons shall be taken randomly from each container.

4.6.14 Magnetic interference. The complete container shall be placed in various positions a distance of 6 inches from a pilot's standby compass (MS17983 or equivalent). The container shall meet the requirements of 3.6.11.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or commercial as specified (see 6.2).

5.1.1 Level A.

5.1.1 Cleaning. Survival kit containers shall be cleaned in accordance with MIL-P-116, process C-1.

5.1.1.2 Drying. Survival kit containers shall be dried in accordance with MIL-P-116.

5.1.1.3 Preservative Applications. Preservatives shall not be used.

5.1.1.4 Unit Packs. Unless otherwise specified (see 6.2), each survival kit container shall be individually unit packed in accordance with sub-method IA8 of MIL-P-116 insuring all wrapping, cushioning, dunnage and containers used shall be completely free of contamination by oil and grease. Unit container shall conform to PPP-B-636, class domestic, style optional.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

5.1.2 Commercial. The commercial preservation of survival kit containers shall be in accordance with the requirements of ASTM D 3951.

5.2 Packing. Packing shall be Level A, B, or commercial, as specified (see 6.2).

5.2.1 Level A. The packaged survival kit containers shall be packed in containers which conform to PPP-B-601, overseas type. Closure and strapping shall be in accordance with applicable container specification.

5.2.2 Level B. The packaged survival kit containers shall be packed in PPP-B-636, weather resistant, or PPP-B-601, domestic type. Closure and strapping shall be in accordance with applicable container specification.

5.2.3 Commercial. The packaged survival kit containers shall be packed in accordance with the requirement of ASTM D 3951.

5.3 Marking

5.3.1 Levels A and B. In addition to any special or other identification marking required by the contract (see 6.2), each unit pack, intermediate and exterior container and unitized load shall be marked in accordance with MIL-STD-129.

5.3.2 Commercial. Commercial marking shall be in accordance with the requirements of ASTM D 3951.

5.3.3 Precautionary markings.

CAUTION: DO NOT ALLOW OIL OR
CONTAMINANTS OF ANY KIND
TO BE USED ON OR ABOUT
SURVIVAL KIT CONTAINERS.

6. NOTES

6.1 Intended use. The survival kit container covered by this specification is intended for use with USAF F-4 aircraft.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. List of interchangeable components and assemblies.

c. First Article requirements.

d. Preparation for delivery requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:42Z
Check the source to verify that this is the current version before use.

6.3 First Article. When a first article inspection is required, the survival kit container shall be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition document regarding arrangements for examinations, tests and approval of the first article.


6.4 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Air Force - 99

Preparing Activity:
Air Force - 82

Project Number:
1660-F511

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:42Z
Check the source to verify that this is the currentversion before use.

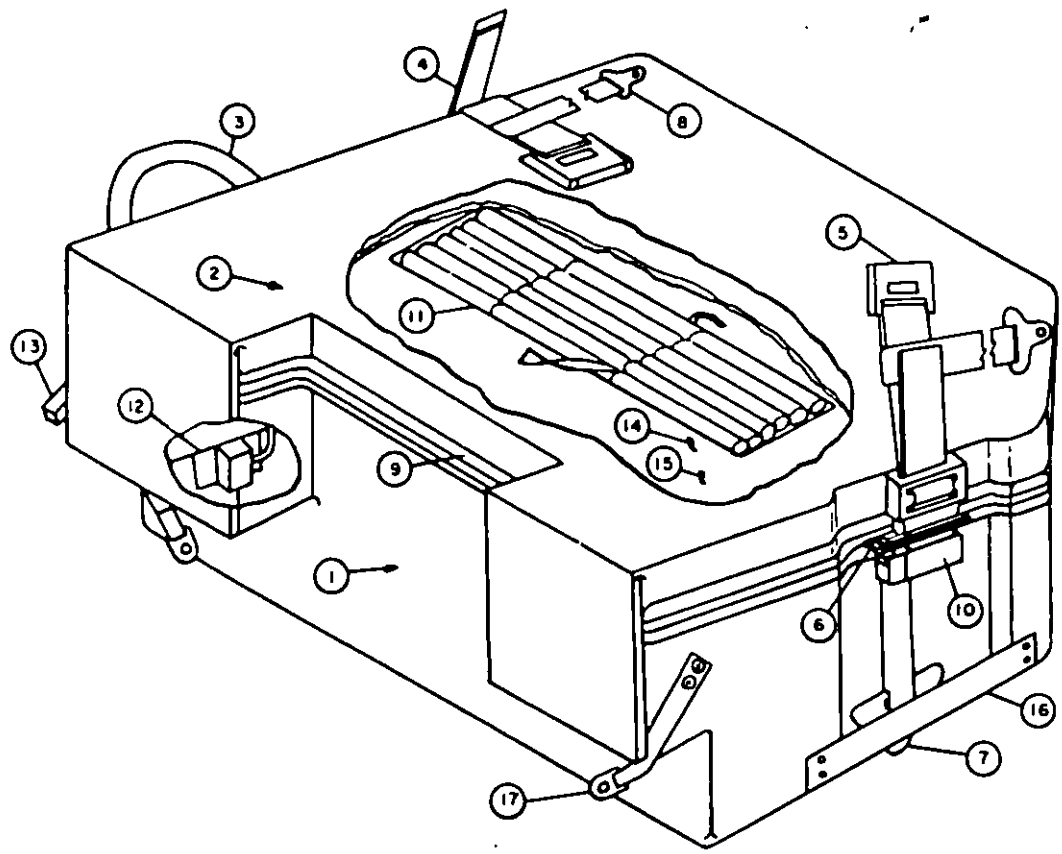

1. Lower Container
2. Cushion
3. Container Operating Handle
4. Right-Hand Attachment Strap
5. Left-Hand Attachment Strap
6. Dropline
7. Arming Device
8. Sticker Clip Strap Assembly, R.H.
9. Lid
10. Left-Hand Harness Attachment Strap Side Release and Lid Lock Assembly
11. Dropline Container
12. Automatic Actuator
13. Mode Selector
14. Raft Retainer
15. Inner Container
16. Spacer Support Panel
17. Container-to-Seat Strap

FIGURE 1. Survival Kit Container

Source: https://assist.dla.mil -- Downloaded: 20260-26T04:42Z
Check the source to verify that this is the current version before use.

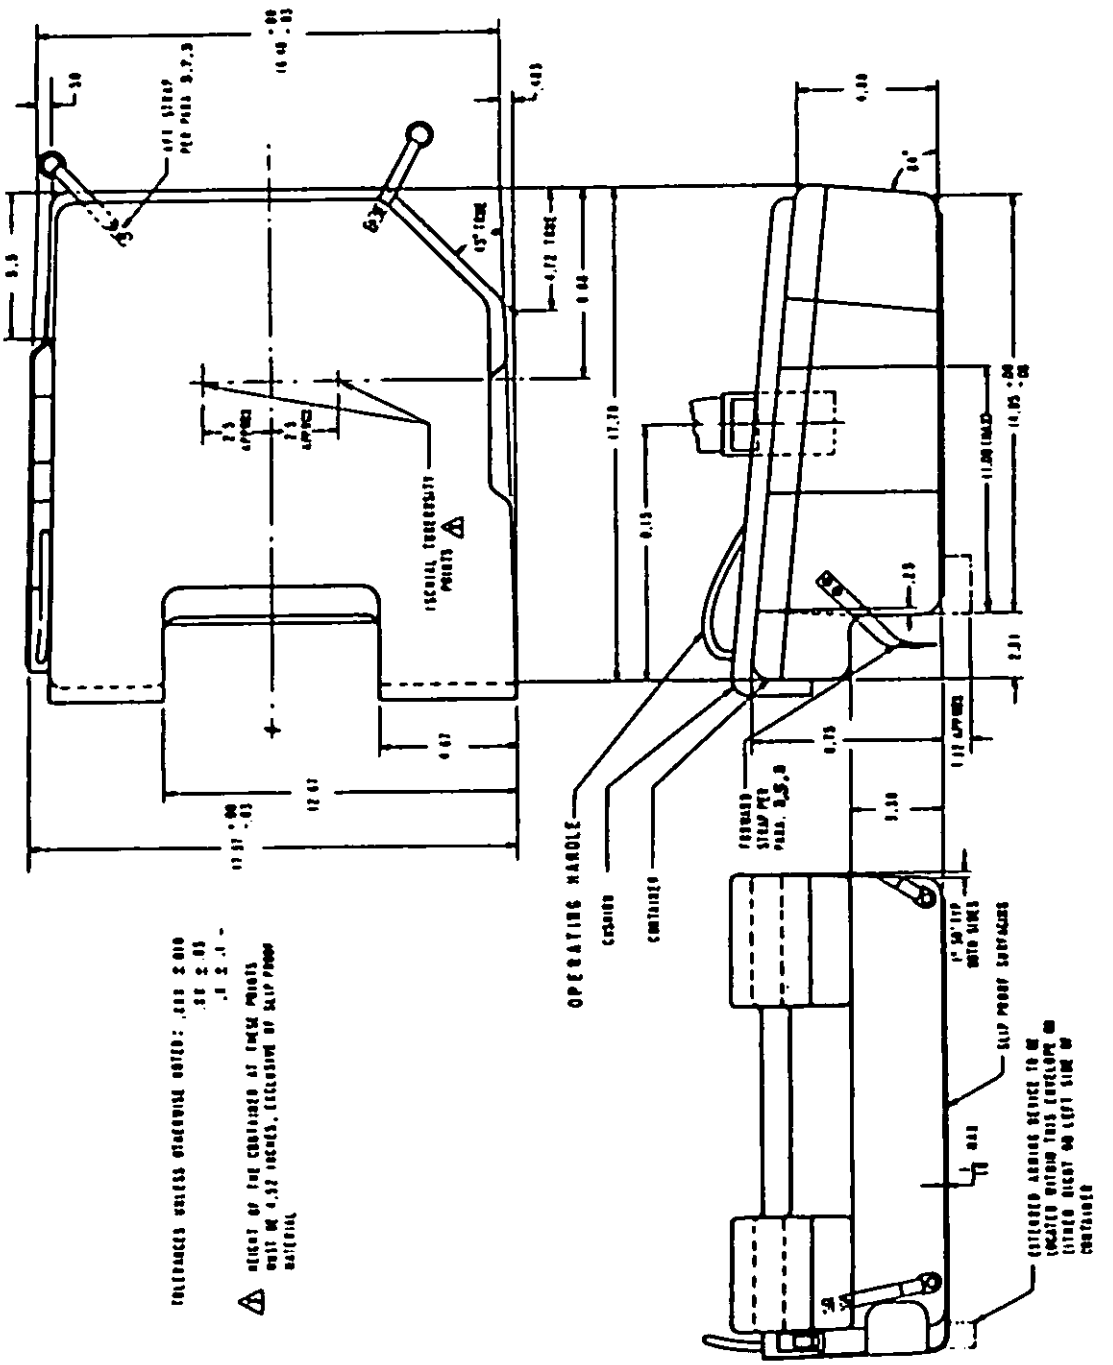


FIGURE 2. Survival Kit Container Envelope

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:42Z
Check the source to verify that this is the currentversion before use.


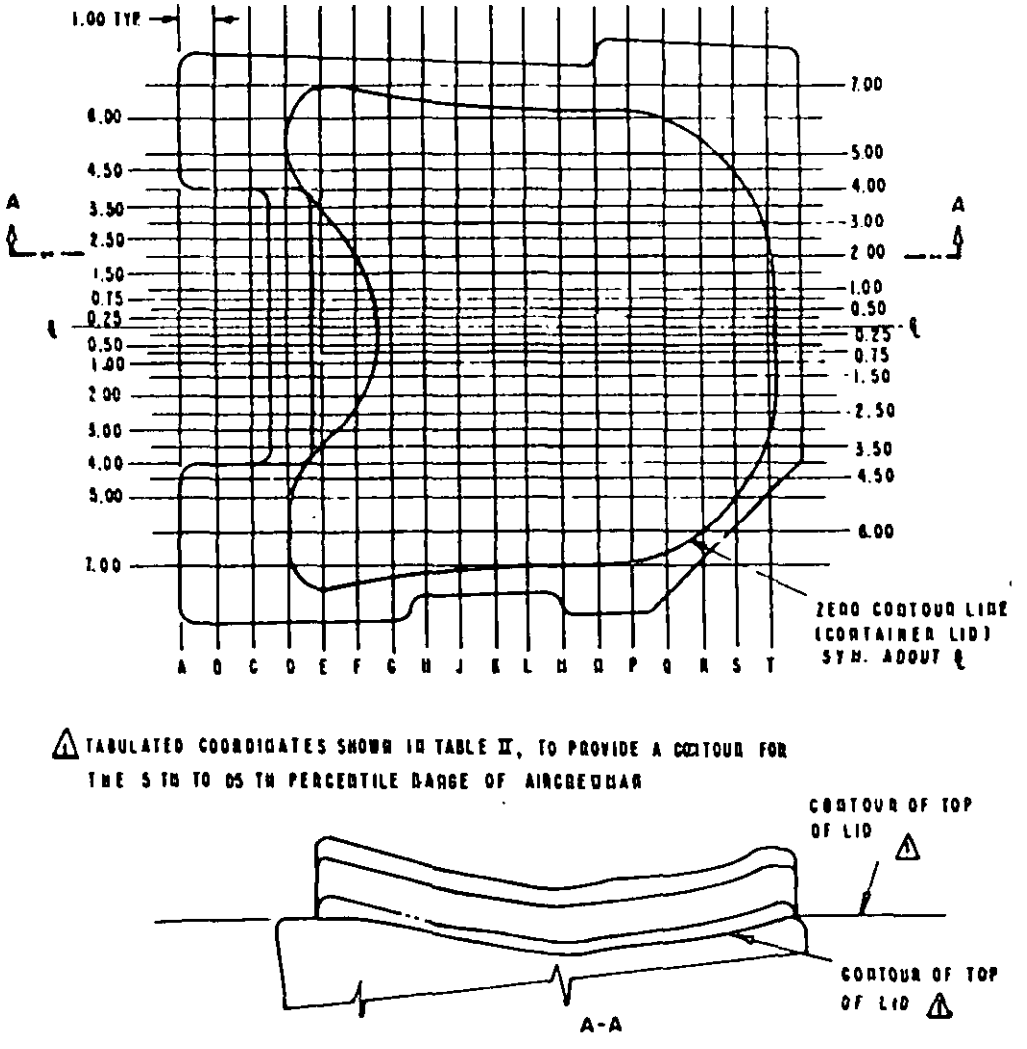


FIGURE 3. Contour Data For Container Lid

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:42Z
Check the source to verify that this is the current version before use.

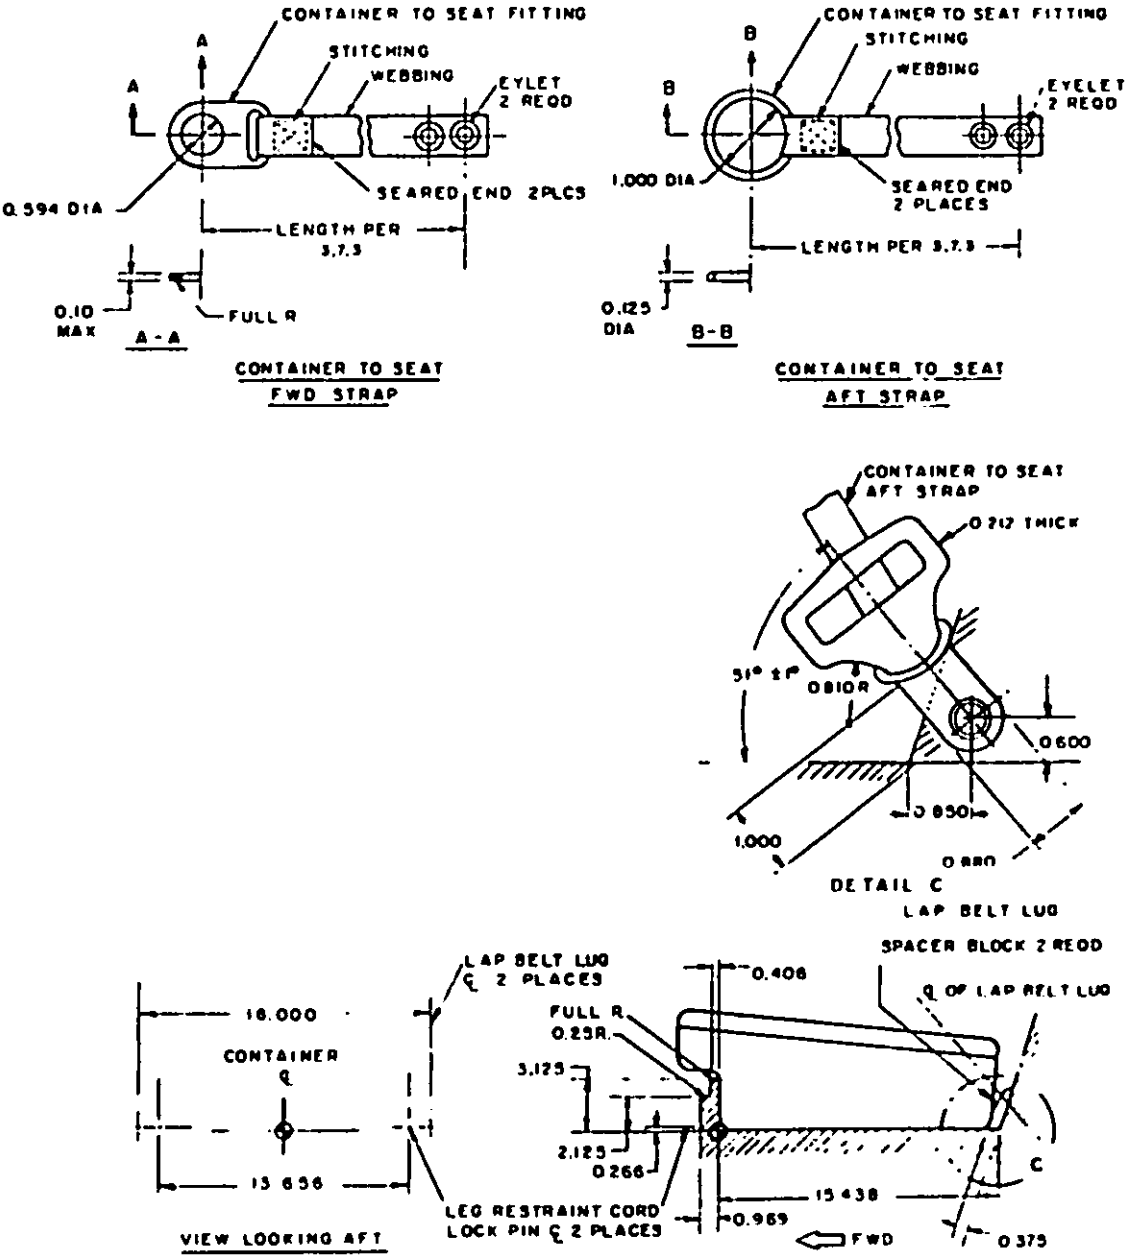

Seat Dimensions Relative to Container

FIGURE 4. Container-to-Seat Straps

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.


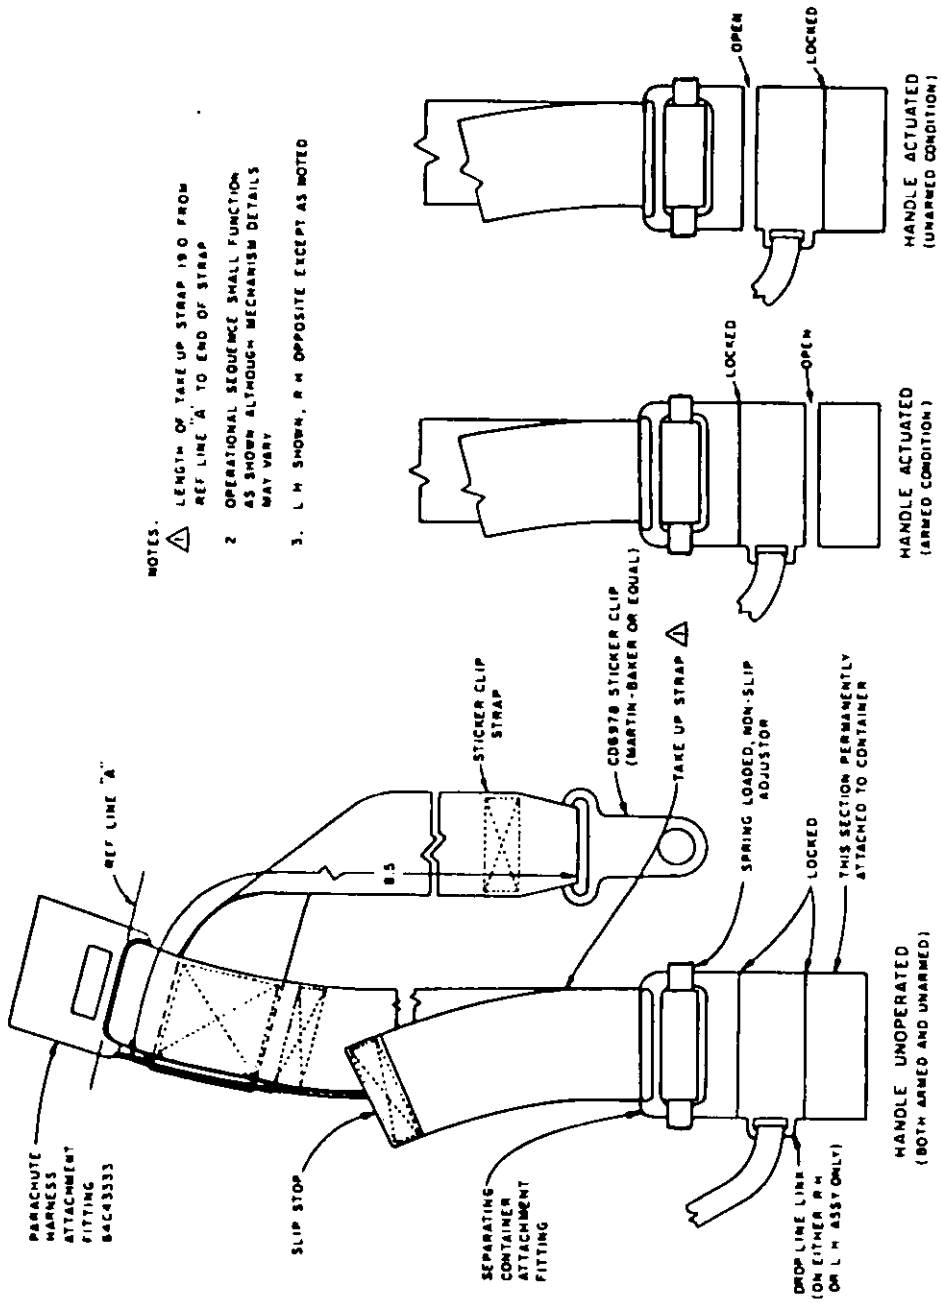


FIGURE 5. Container-To-Parachute Hardware

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

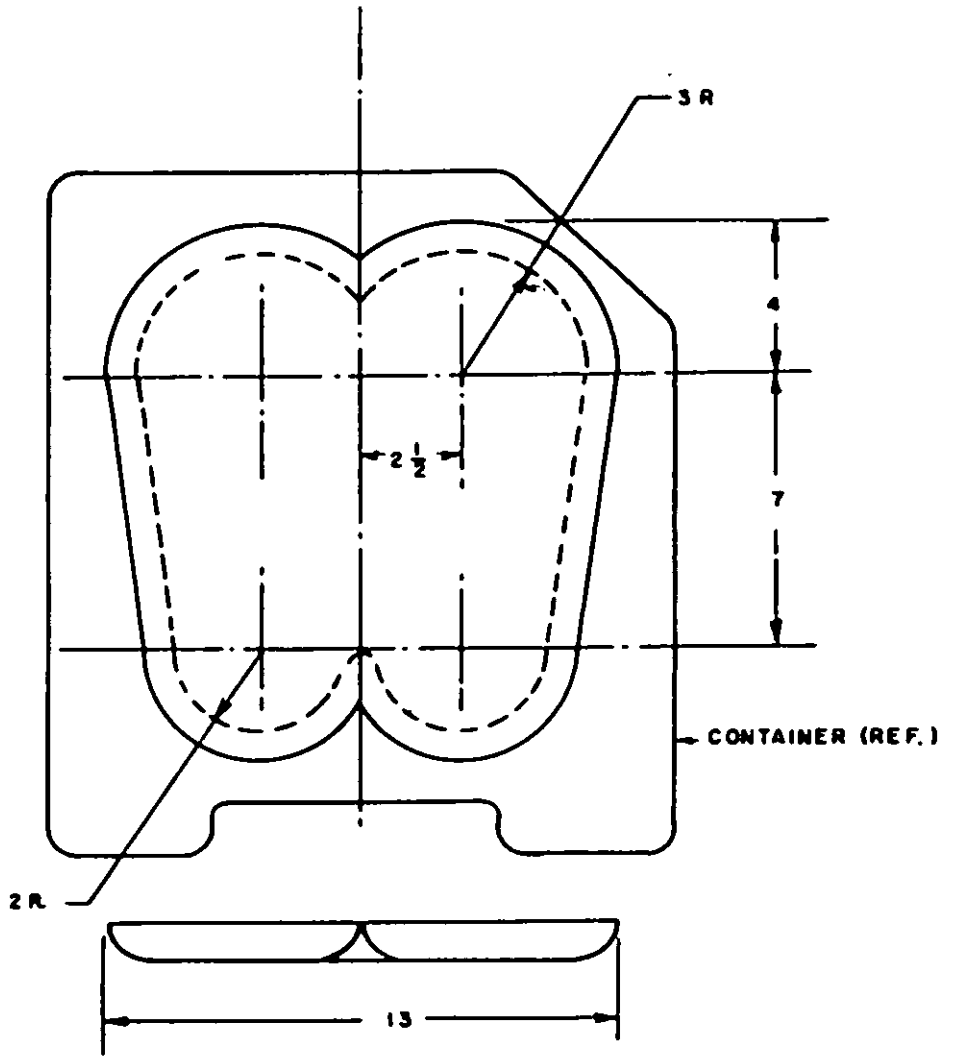

NOTE: DIMENSIONS IN INCHES
TOLERANCES ± 1/4

7

FIGURE 6. Compression Test Form

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:42Z
Check the source to verify that this is the current version before use.

TABLE II. Coordinates for Contour of Top of Lid

T	-.24	-.22	-.17	-.16	-.11	-.09	-.08	-.03	-.01	0	0	0	0	0
S	-.49	-.47	-.43	-.40	-.35	-.39	-.35	-.30	-.25	-.20	-.15	-.08	-.02	0	0
R	-.66	-.65	-.61	-.56	-.56	-.58	-.54	-.53	-.45	-.40	-.32	-.24	-.18	-.01	0
Q	-.79	-.77	-.75	-.71	-.68	-.70	-.69	-.70	-.66	-.58	-.50	-.41	-.34	-.13	0
P	-.87	-.87	-.84	-.83	-.79	-.77	-.80	-.83	-.77	-.72	-.66	-.56	-.47	-.27	0
N	-.98	-.97	-.97	-.94	-.89	-.92	-.96	-.92	-.86	-.78	-.75	-.67	-.58	-.35	-.01
M	-1.03	-1.03	-1.03	-1.03	-1.03	-1.09	-1.09	-1.06	-1.00	-.92	-.85	-.75	-.66	-.41	-.04
L	-.96	-.96	-.96	-.96	-.94	-1.00	-.98	-.96	-.93	-.85	-.85	-.78	-.69	-.46	-.06
K	-.84	-.84	-.84	-.84	-.82	-.80	-.82	-.84	-.81	-.77	-.78	-.73	-.67	-.44	-.07
J	-.63	-.63	-.63	-.63	-.63	-.67	-.69	-.72	-.71	-.70	-.69	-.65	-.61	-.38	-.08
H	-.35	-.35	-.35	-.39	-.39	-.46	-.51	-.54	-.52	-.53	-.53	-.56	-.51	-.32	-.08
G	-.07	-.07	-.08	-.09	-.11	-.19	-.25	-.29	-.31	-.34	-.41	-.44	-.41	-.27	-.09
F	0	0	0	0	0	0	0	-.01	-.09	-.15	-.25	-.30	-.31	-.21	-.10
F'	0	0	0	0	0	0	0	0	0	0	-.07	-.16	-.21	-.17	-.08
D	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
C											0	0	0	0	0
B		.									0	0	0	0	0
A											0	0	0	0	0
	℄	.25	.50	.75	1.00	1.50	2.00	2.50	3.00	3.50	4.00	4.50	5.00	6.00	7.00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE AIR FORCE

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

Engineering Division
San Antonio Air Logistics Center
Kelly AFB, TX 78241

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T04:42Z
Check the source to verify that this is the currentversion before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-S-83047B	Survival Kit Container, CNU-111/P

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:42Z
Check this source to verify that this is the current version before use.