MIL-S-83333A
6 March 1975
SUPERSEDING
MIL-S-83333 (USAF)
12 October 1971

MILITARY SPECIFICATION

SHIRTS, MAN'S, SHORT SLEEVE, POLYESTER-COTTON (DURABLE PRESS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

* 1.1 Scope. This specification covers short-sleeve shirts made from blue, durable-press, polyester-cotton material.

* 1.2 Classification. The shirts shall be one type and in the following classes as specified (see 6.2):

Class 1 - shirt without shoulder loops

Class 2 - shirt with shoulder loops.

* 1.3 Sizes. The shirts shall be in the following sizes as specified (see 6.2):

13 13-1/2 14 14-1/2 15 15-1/2 16 16-1/2 17 17-1/2 18.

2. APPLICABLE DOCUMENTS

* 2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

V-B-871	Button, Sewing Hole, and Button, Staple, (Plastic)
V-T-276	Thread, Cotton
UU-P-268	Paper, Kraft, Wrapping
DDD-L-20	Label; for Clothing, Equipage, and Tentage, (General Use)
PPP-F-320	Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade) and Cut Shapes

FSC 8405

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

Military

MIL-B-17757	Boxes, Fiberboard, Corrugated (Modular Sizes)
MIL-T-43548	Thread, Polyester, Cotton-Covered
MIL-C-43594	Cloth, Interlining, Polyester
MIL-C-83314	Cloth, Broadcloth, Polyester/Cotton (Durable Press)

STANDARDS

Federal

FED-STD-751	Stitches, Seams, and Stitchings

Military

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-1492	Provisions for Evaluating Quality of Shirts

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following publications form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Department of Defense (DOD) Standard Shades for Buttons 1966

(Copies of this publication may be obtained from the Color Association of the United States, Inc., 200 Madison Avenue, New York, New York 10016.)

Technical Manual of the American Association of Textile Chemists and Colorists (AATCC)

(Copies of the AATCC manual may be obtained from the American Association of Textile Chemists and Colorists, Research Triangle Park, Post Office Box 886, Durham, North Carolina 27702.)

(Technical society and technical association specifications and standards are generally available for reference from libraries and are also distributed among technical groups and using federal agencies.)

3. REQUIREMENTS

3.1 Materials

3.1.1 Basic fabric. The basic fabric shall conform to MIL-C-83314.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:43Z
Check the source to verify that this is the current version before use.

3.1.2 Interlining. The interlining for the collar and for the pocket flaps shall conform to MIL-C-43594.

* 3.1.3 Thread. The thread shall be white. Unless otherwise specified herein, the thread shall conform to ticket No. 70, 2 ply of MIL-T-43548. As an option, thread conforming to type 1A2, ticket No. 40, 6 ply of V-T-276 may be used for making the buttonholes and sewing on the buttons.

3.1.4 Buttons. The buttons shall conform to type II, class K, style 25, size 19 line of V-B-871. The color of the buttons shall be DOD Button Shade White BA, Cable No. 62031 (see DOD Standard Shades for Buttons 1966).

* 3.2 Design. The class 1 shirt and the class 2 shirt shall be the same design except for the shoulder loops. The class 2 shirt shall have shoulder loops, but the class 1 shirt shall not have shoulder loops. The shirts shall be an open collar type. The shirts shall be of safety-stitch construction. The shirts shall have a yoke, a soft collar, two patch pockets with flaps on the front, and a pencil pocket under the patch pocket on the left front. The collar and the flaps shall be interlined.

* 3.3 Construction. The shirts shall be constructed as specified in table I. Unless otherwise specified in table I, the manufacturer will not be required to follow the exact sequence of operations as listed in table I.

3.3.1 Stitches, seams, and stitchings. Stitch, seam, and stitching types shall conform to FED-STD-751. The stitches per inch specified in table I shall be interpreted to be the minimum and the maximum permitted. Wherever two or more methods of seams or stitchings are given for the same part of an operation, any one of them may be used. The looper (under thread) of stitch type 401 shall be on the inside of the shirt. Edge stitching and top stitching shall be uniformly gaged throughout the shirt. The guides and knives on machines producing stitch types 515, 516, and 519 shall be set to trim only the raveled edges of the fabric. The trimming shall not exceed 1/16 inch. Seam allowances shall be maintained. Seams shall be sewn so that there will be no raw edges, run-offs, twists, pleats, or puckers. The following practices to avoid puckering and to produce the flattest seams possible shall be given consideration by the manufacturer of the shirt. The needle should be the smallest size possible with a slim point. The smallest throat plate hole possible should be used to prevent flagging. Pressure on the presser foot should be just enough to insure a steady flow of material. The feed dogs should contain 18 to 20 teeth per inch for normal sewing and 20 to 25 teeth per inch for stitching down. All attachments should be as smooth as possible to permit free flowing of the material through the machine. The lightest possible thread tensions, while maintaining a good stitch, should be used. The upper and lower threads shall be balanced. Checks to insure that blunt needles are eliminated and that machine adjustments are maintained should be made frequently.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:43Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing Operations

No.	Description of Operation	Thread		Stitch Type	Seam and Stitch Type	Stitches Per Inch
		Top	Lower			
1	Cut parts (a) Cut the shirts in strict accordance with the patterns which show directional lines and marks and notches for proper assembly. Place the directional lines in the warp direction. If the fronts of the shirts are cut from the uneven edge of the lay, they shall be blocked out and relaid so that the width of the facings will be exactly the same as the pattern. The back edge of the front facing shall be placed on the selvage. (b) Cut all parts, except parts that may be cut from ends, from the same piece of the basic fabric. The under ply of the flaps, the pencil pocket, the under ply of the collar leaf, and the under ply of the yoke may be cut from ends. The parts cut from ends shall approximate the shade of the other parts of the shirt.					
2	Replace damaged parts (a) Replace at the time of cutting any part that contains a hole, a smash, a multiple float, or a loose slub. (b) Replace any part damaged during the manufacturing process by a needle chew, a cut, a tear, a hole, a burn, or an exposed drill hole. A darn in the seam allowance or an invisible mend will be acceptable.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing Operations (Cont)

No.	Description of Operation	Thread		Stitch Type	Seam and Stitch Type	Stitches Per inch
		Top	Lower			
3	Mark, ticket, or bundle parts (a) Mark, ticket, or bundle all parts, except parts cut from ends, to insure a uniform shade and size throughout the shirt. Marking may be any method except metal fastening devices, sew-on tickets, or adhesive-type tickets that will leave traces of paper or adhesive on the material after the removal of the tickets.					
4	Apply or attach labels (a) Apply the marking of the size label so that it will be centered on the stand portion of the topcollar at the back. A tolerance of 1/4 inch off center will be permitted.					
	(b) Position the instruction label on the outside of the left front s , that the bottom of the label in the finished shirt will be 2 to 2-1/2 inches from the hemmed bottom and the side of the label will be 1-1/4 to 2 inches from the folded edge. Stitch the instruction label on all four sides.	70-2	70-2	301	LSbj-1	8-14
	(c) Apply the marking of the identification label at the center back on the inner yoke, centered between the top and the bottom. A tolerance of 1/4 inch off center will be permitted in either direction.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing Operations (Cont)

No.	Description of Operation	Thread		Stitch Type	Seam and Stitch Type	Stitches Per Inch
		Top	Lower			
5	Make collar (a) Join the three plies of the collar with the outer ply and the under ply face to face and the interlining next to the outer ply.	70-2	70-2	301 or 401	SSe-2(a)	10-14
	(b) Trim the corners, turn, and press the collar points. A collar pointing machine may be used.					
	(c) Edge stitch the collar 1/16 to 1/8 inch from the edge.	70-2	70-2	301	SSe-2(b)	10-14
6	Make flaps for patch pockets (a) Join the three plies of the flap along the side and the pointed edges.	70-2	70-2	301 or 401	SSe-2(a)	10-14
	(b) Turn and work out the edges and the point, and single stitch 1/16 to 1/8 inch from the edges. The edges of the flap shall be completely forced out, and the edge stitching shall be uniform.	70-2	70-2	301	SSe-2(b)	10-14
7	Make buttonholes in flaps (see 3.3.1.2) (a) Make a vertical buttonhole in the center of each flap with the inside edge of the buttonhole 1/2 inch from the bottom edge of the flap.	70-2 or 40-6	70-2 or 40-6	304		42-46 stitches per buttonhole including tack
8	Make and set pencil pocket (a) Turn down the top edge of the pencil pocket 1 inch (plus or minus 1/4 inch), and stitch 1/16 inch from the raw edge.	70-2	70-2	301	EFa-1	10-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing Operations (Cont)

No.	Description of Operation	Thread		Stitch Type	Seam and Stitch Type	Stitches Per Inch
		Top	Lower			
	(b) Turn in the side edges of the pencil pocket 1/2 inch, and stitch to the left of the shirt as indicated by the marks on the patterns. Tack the ends of the seam by back-stitching. The finished pencil pocket shall be 2 inches (plus or minus 1/8 inch) wide.	70-2	70-2	301	LSd-1	10-14
	(c) Form two compartments in the pencil pocket with a row of vertical stitching at the center (plus or minus 1/8 inch) through the shirt.	70-2	70-2	301	SSv-1	10-14
9	Hem patch pockets					
	(a) Hem the patch pockets with the raw edge turned in. The width of the finished patch pocket hem shall be 7/8 inch (plus or minus 1/8 inch) at the sides and 1-3/8 inches (plus or minus 1/8 inch) at the center.	70-2	70-2	301	EFb-1	10-14
10	Set patch pocket and flaps					
	(a) Stitch the patch pockets on the fronts, as indicated by the marks on the patterns, 1/16 inch from the edge; continue stitching 3/16 to 1/4 inch across the top of the patch pockets and 1/2 to 5/8 inch diagonally down to the line of the 1/16-inch stitching. The pocket may be precreased. The front facings may be caught in the pocket stitching. The finished pocket shall be parallel to the front edge of the shirt.	70-2 70-2	70-2 70-2	301 and 301	LSd-1 SSv-1	10-14 10-14
	(b) Stitch the flaps above the top of the patch pockets, with the raw edge of the flap	70-2	70-2	301	LSb1-1	10-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing Operations (Cont)

No.	Description of Operation	Thread		Stitch Type	Seam and Stitch Type	Stitches Per Inch
		Top	Lower			
	on the drill marks of the patterns, 1/8 to 3/16 inch from the raw edge. Turn down the flaps; raise stitch 3/16 to 1/4 inch from the turned edge, with the ends of the flaps tacked. The front facing shall be caught in this operation. The pocket and the flap edges shall be in parallel alignment (plus or minus 1/4 inch) with the front edge of the shirt. The sides of each patch pocket shall be covered by the flap. The patch pockets and the flaps shall be uniform in size.					
11	Attach yoke (a) Position the back of the shirt between the two plies of the yoke and with the back and the yoke edges even. Stitch all plies together. There shall be no fullness between the two plies in the finished shirt. The finished yoke shall be without twists or puckers.	70-2	70-2	301 or 401	SSa-1	10-14
12	Make shoulder loops (class 2 shirt only) (a) Fold a strip of the basic fabric in half lengthwise. Turn both raw edges to the inside, and stitch 1/16 inch from each edge. The finished shoulder loops shall be 1/4 to 5/16 inch wide.	70-2	70-2	301	EFp-2	10-14
	or					
	(b) Abut the raw edges of a strip of the basic fabric; double stitch, using a covering stitch on the underside, not less than 3/16-inch gage.	70-2	70-2	402 or 406	EFh-1	10-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing Operations (Cont)

No.	Description of Operation	Thread		Stitch Type	Seam and Stitch Type	Stitches Per Inch
		Top	Lower			
13	Join shoulder seams (class 1 shirt only) (a) Position the fronts between the two plies of the yoke and with the fronts and the yoke edges even. Stitch all plies together. The stitching shall not show on the finished shirt.	70-2	70-2	301 or 401	SSa-1	10-14
14	Join shoulder seams and attach shoulder loops (class 2 shirt only) (a) Position the fronts between the two plies of the yoke with the yoke edges even. Stitch all plies together simultaneously, inserting and catching two shoulder loops in each shoulder seam. The shoulder loops shall be inserted so that one shoulder loop will be centered 1-1/4 inches (plus 1/8 or minus 0 inch) up along the front shoulder seam from the finished sleeve seam and the other shoulder loop will be centered 3-3/8 inches (plus or minus 1/8 inch) from the first shoulder loop. The stitching shall not show on the finished shirt.	70-2	70-2	301 or 401	SSa-1	10-14
	(b) Turn under the free end of each shoulder loop 1/4 to 5/16 inch, and securely stitch or bartack to the yoke and the back of the shirt 1/16 inch from the folded edge. The tack shall extend the width of the shoulder loop but not beyond. The shoulder loop nearest the armhole seam shall have a free opening of 1-1/4 inches (plus 1/8 or minus 0 inch). The shoulder loop nearest the collar shall have a free opening of 1 inch (plus or minus 1/8 inch).	70-2	70-2	301 or bartack or automatic loop tacker		10-14 28 stitches per bartack 24-28 stitches per tack

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing Operations (Cont)

No.	Description of Operation	Thread		Stitch Type	Seam and Stitch Type	Stitches Per Inch
		Top	Lower			
15	Set sleeves (a) Set the sleeves by overedging and seaming the raw edges together in one operation. Note: Perform No. 15(a) before No. 16(a).	70-2	70-2	515 or 516 or 519	SSa-2	10-14
16	Join side and underarm seams (a) Join the side and the underarm seams by overedging and seaming the raw edges together in one operation, with the sleeve-setting seam turned toward the sleeve. Note: Perform No. 16(a) before No. 17(a) and 18(a).	70-2	70-2	515 or 516 or 519	SSa-2	10-14
17	Hem sleeves (a) Turn under the bottom edge of the sleeves, with the raw edge turned in, and stitch 1/16 to 1/8 inch from the edge. The finished sleeve hem shall be 1-1/8 inches (plus or minus 1/8 inch) wide.	70-2	70-2	301	EFb-1	10-14
18	Hem bottom (a) Turn the bottom of the fronts and the back of the shirt with the raw edges turned in. Stitch through the shirt with the hem extending to the folded edge of the fronts catching the grown-on facing in the stitching. The finished hem shall be approximately 1/8 inch wide. The side seams shall be turned in the same direction as turned at the sleeve hem.	70-2	70-2	301	EFb-1	10-14

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:43Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing Operations (Cont)

No.	Description of Operation	Thread		Stitch Type	Seam and Stitch Type	Stitches Per Inch
		Top	Lower			
19	Join collar to shirt (a) Fold the front facing, at the notch, to the outside. Insert the collar between the fronts and the facings. With the center back notches matching, seam across the step and the gorge to the back edge of the facing and seam the undercollar to the neck of the shirt, catching the collar interlining.	70-2	70-2	301	SSa-1	10-14
	(b) Turn the facing, and work out the steps. Turn under the unsewn portion of the top-collar, and stitch to the neck through the undercollar 1/16 inch from the edge, catching (by inserting) the top end of the facing in the stitching.	70-2	70-2	301	LSb-1	10-14
	(c) If the edge is cut or frayed, overedge the selvage edge of the facing.	70-2	70-2	502 or 503	SSa-1	6-8
20	Make buttonholes in left front (see 3.3.1.2) (a) Mark or gage and make five vertical buttonholes in the left front of the shirt, through the facing, as indicated by the marks on the pattern. The buttonholes shall be 3/4 inch (plus or minus 1/8 inch) from the front edge. The second front buttonhole shall be in horizontal alignment with the patch pocket flap buttonholes.	70-2 or 40-6	70-2 or 40-6	304		42-46 stitches per buttonhole including tack
21	Sew on buttons (a) Sew five buttons on the right front 5/8 to 3/4 inch from the front edge through the front facing. The buttons shall be securely sewn and properly aligned with the buttonholes in the front of the shirt.	70-2 or 40-6 70-2 or 40-6	70-2 or 40-6	301 or 101		14-16 stitches per button 14-16 stitches per button

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing Operations (Cont)

No.	Description of Operation	Thread		Stitch Type	Seam and Stitch Type	Stitches Per Inch
		Top	Lower			
	(b) Sew one button on each patch pocket through pocket hem. The buttons shall be properly aligned with the corresponding buttonholes in the flaps to effect a smooth closure.	70-2 or 40-6 70-2 or 40-6	70-2 or 40-6	301 or 101		14-16 stitches per button 14-16 stitches per button
22	Clean shirt (a) Trim all ends of thread. Remove loose threads from the shirt. (b) Remove all spots and stains from the shirt. (c) Remove all shade tickets from the shirt.					
23	Press (a) Press the shirt with a hot head pressing machine as follows: (1) After the collar is fabricated but before the collar is joined to the shirt, press the collar. (2) After the pockets and the flaps are set but before the fronts are joined to the backs, press both finished fronts. (3) After the yoke is attached to the back but before the back is joined to the fronts, press the back with the yoke in the extended position.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing Operations (Cont)

No	Description of Operation	Thread		Stitch Type	Seam and Stitch Type	Stitches Per Inch
		Top	Lower			
	(b) As an option to No. 23(a)(2) and 23(a)(3), the entire shirt may be pressed after fabrication with a Formatic hot head pressing machine, or equal, which is capable of pressing the entire finished shirt. (Formatic hot head pressing machines are manufactured by the American Laundry Machinery Co., Cincinnati, Ohio.) (c) Press the shirt with a heated iron at a permanent press (moderate) setting as follows: (1) Press the bottom, the side seams, and the underarm seams. (2) Touch-up the shirt before folding it for packaging. Note: A steam inflated bag type pressing machine shall not be used to press the shirt. The hot head pressing machine specified herein shall be a hot head pressing machine that is equipped with controls for accurate temperature (350 - 370 degrees Fahrenheit), time (minimum of 10 seconds, with 3 seconds for steam and 7 seconds for bake and vacuum), and pressure.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

3.3.1.1 Ends of seams, thread breaks, and repairs. Except for the ends caught in other seams or stitchings or the ends of continuous lines of stitchings, the ends of all seams and stitchings that are produced with stitch type 301 shall be backstitched not less than 1/4 inch. The ends of continuous lines of stitchings, except the ends of the stitchings on the label, shall overlap not less than 1/2 inch. The ends of stitchings on the label shall overlap not less than three stitches. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks of stitch type 401 may be repaired using stitch type 301. Additional basting or holding stitching to facilitate the manufacture of the shirt will be permissible provided the thread is removed or does not show on the finished shirt.

3.3.1.2 Buttonholes. The buttonholes shall be straight-cut and shall fit a size 19-line button. The buttonhole stitching shall be securely caught in the fabric, and the ends shall be securely tacked. If a purl-type buttonhole is used, the purling shall be on the outside of the shirt. All loose thread ends shall be trimmed or fused to within 1/8 inch of the tack. Additive treatments or materials to secure the ends of the stitching or to stiffen the fabric prior to stitching the buttonholes shall not be used.

* 3.3.2 Cutting. The parts of the shirt shall be cut, from the materials specified herein, in accordance with the pattern parts listed in table II. A pattern part is not furnished for the shoulder loops for the class 2 shirt; however, the shoulder loops for the class 2 shirt shall be made of the basic fabric specified in 3.1.1.

3.3.3 Pressing. The pressing specified herein shall be accomplished with a heated pressing iron or machine.

* 3.4 End item appearance. After the finished shirt has been laundered five times, the seam appearance of the finished shirt shall have a seam and stitching appearance rating of 3.0 for the underarm seams, of 3.0 for the side seams, and of 3.5 for each of the following stitched areas: collar, shoulder, yoke, armhole, sleeve hem, pockets, flaps, and front edges. (The bottom hem and the label stitching shall not be included in the seam and stitching appearance rating.)

* 3.5 Patterns. Unless otherwise specified (see 6.2), standard patterns will be furnished by the procuring activity. The standard patterns provide an allowance of 1/4 inch for all seams except for the bottom hem and for setting the pockets. The seam allowance for the bottom hem and for setting the pockets shall be 3/8 inch. The standard patterns shall not be altered in any way. The standard patterns shall be used only as a guide for cutting the manufacturer's working patterns. The manufacturer's working patterns shall be identical to the standard patterns.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

* TABLE II. Pattern Parts

Material	Pattern Parts 1/	Cut Parts
Basic fabric (see 3.1.1)	Front	2
	Back	1
	Yoke	2
	Sleeve	2
	Flap	4
	Collar 2/	2
	Pocket	2
	Pencil pocket	1
Interlining (see 3.1.2)	Flap interlining	2
	Collar interlining 2/	1

1/ Shapers will be furnished for the finished pocket and flap.
2/ The same pattern part shall be used for the collar and the collar interlining.

* 3.6 Finished measurements. The finished measurements shall conform to table III. The finished measurements shall be taken as follows: Measure the sleeve length, along the inseam, from the armhole to the bottom of the sleeve hem. Measure the 1/2 chest, with the shirt buttoned, from the folded edge to folded edge at the base of the armhole. Measure the back length, at the center back, from the collar joining seam to the bottom edge of the shirt. Measure the collar length, with the collar lying flat, from side edge to side edge at the seam joining collar to neck.

* 3.7 Labels. Each shirt shall have an identification label, a size label, and an instruction label. All the labels shall have colorfastness to laundering as specified in DDD-L-20. The identification label shall conform to type IV, class 1 of DDD-L-20. The size label shall conform to type IV, class 2 of DDD-L-20. The instruction label shall conform to type I, class 3 of DDD-L-20. The instruction label shall contain the following information:

1. For machine washing use wash and wear cycle. Wash with moderately hot water (120° F), using soap or mild detergent.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:43Z
Check the source to verify that this is the current version before use.

2. For hand washing, wash in moderately hot water (120° F), using soap or mild detergent. Do NOT wring or twist.

3. Dry in tumble dryer at hot setting. Remove immediately at end of drying. Shape and hang.

4. To drip dry, remove from water before last spin cycle. Shape and hang.

5. If touch up is required, iron at moderate heat setting.

DO NOT REMOVE THIS LABEL.

TABLE III. Finished Measurements

Size of Shirt	Finished Measurements in Inches 1/ 2/			
	Sleeve Length	1/2 Chest	Back Length	Collar Length
13	6-1/2	18-1/4	30-1/4	13-1/2
13-1/2	6-1/2	19-1/4	30-1/2	14
14	6-1/2	20-1/4	30-3/4	14-1/2
14-1/2	6-1/2	21-1/4	31	15
15	6-1/2	22-1/4	31-1/4	15-1/2
15-1/2	6-1/2	23-1/4	31-1/2	16
16	6-1/2	24-1/4	31-3/4	16-1/2
16-1/2	6-1/2	25-1/4	32	17
17	6-1/2	26-1/4	32-1/4	17-1/2
17-1/2	6-1/2	27-1/4	32-1/2	18
18	6-1/2	28-1/4	32-3/4	18-1/2

1/ The finished measurements shall be taken as specified in 3.6.
2/ The tolerances shall be plus or minus 1/4 inch for the sleeve length and the collar length and plus or minus 1/2 inch for the 1/2 chest and the back length.

3.8 Workmanship. The shirt shall be manufactured in a thoroughly workmanlike manner.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:43Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Inspection

4.2.1 Testing of materials and components. Unless otherwise specified by the procuring activity (see 6.2), materials and components shall be examined and tested in accordance with all of the applicable requirements of the documents referenced herein.

* 4.2.2 Testing of end item. The end item shall be tested, as specified in 4.4.1 and 4.4.2, to determine compliance with the requirements specified in 3.4. All requirements shall be applicable to the sample unit. The sample unit shall be one finished shirt. The sample size shall be as specified in table IV. One shirt shall be used to evaluate all appearance requirements. If one or more units fail to meet any of the specified requirements, the lot shall not be acceptable.

TABLE IV. Sample Size

Lot Size	Sample Size
800 or less	2
801 to 22,000 inclusive	3
22,001 or more	5

* 4.2.3 Examination of end item. The end item shall be examined as specified in 4.2.3.1 and 4.2.3.2. The occurrence of defects during these examinations shall not exceed the applicable point value or defect limit specified in MIL-STD-1492.

* 4.2.3.1 Individual examination. As a final step in the supplier's production control plan and before formation of a lot, each shirt shall be pressed, buttoned, and laid out flat on a table before it is folded for packaging and shall be examined for the selected defects listed in MIL-STD-1492. Any shirt that contains a selected defect shall not be included in an end item lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

* 4.2.3.2 Sampling examination. After the end items have been subjected to the individual examination, samples of the end items shall be selected and subjected to the end item examination for dress shirts and the dimensional examination as described in MIL-STD-1492.

* 4.2.4 Examination of preparation for delivery. Shipping containers fully prepared for delivery except for closure shall be subjected to the examination of preparation for delivery specified in MIL-STD-1492. The occurrence of defects during the examination of preparation for delivery shall not exceed the applicable point value or defect limit specified in MIL-STD-1492.

* 4.3 Test equipment. The washing and drying equipment, the lighting equipment, and the photographic standards for single needle stitching used for the tests and evaluations specified in 4.4.1 and 4.4.2 shall be as described in AATCC Test Method 88-B-1970 (see Technical Manual of the AATCC). The ballast specified in 4.4.1 shall consist of durable press shirts that are approximately the same weight as the test shirts or of 3-feet-square hemmed pieces of durable press fabric that is similar to the fabric of the test shirts.

* 4.4 Test methods

* 4.4.1 Laundering and conditioning. If the shirts selected as test samples will weigh less than 4 pounds, ballast to make up a standard 4-pound load shall be added to the test shirts. The front of each shirt in the 4-pound load shall be unbuttoned. The 4-pound load shall be placed in the washing machine. Ninety grams of AATCC Standard Detergent 124 shall be placed in the washing machine. The washing machine shall be set for 12 minutes on the hot wash and wear cycle, high water level. The washing machine shall be filled with water from a water source set at 140 (plus or minus 5) degrees Fahrenheit. Immediately after the washing machine has completed the final spin cycle, the entire load shall be removed, untangled, and placed in the dryer. The dryer shall be operated at a temperature of 140 to 160 degrees Fahrenheit until the entire load is dry. After the entire load has been dried, the entire load shall be tumbled for 5 minutes in the dryer with the heat turned off (cool-down cycle). Immediately after the tumbling is completed, the entire load shall be removed from the dryer. The preceding wash, dry, and tumble cycle shall be repeated until the entire load has been subjected to five complete wash, dry, and tumble cycles. After completion of the fifth cycle, the test shirts shall be conditioned for 2 hours at 70 (plus or minus 10) degrees Fahrenheit and at a relative humidity of 50 to 65 percent. (Note: During the interruptions between the cycles and during the conditioning and the evaluations, the test shirts shall be placed on wooden or plastic hangers and shall be buttoned at the front.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

* 4.4.2 Evaluation. After the test shirts have been laundered and conditioned as specified herein, the test shirts shall be evaluated by three trained observers. Each of the trained observers, independent of the other observers, shall evaluate each of the test shirts as follows: The hanger upon which the test shirt has been placed shall be suspended on the viewing board so that the test shirt will lie flat on the surface of the viewing board. The photographic standards for single needle stitching shall be placed on the viewing board. The observer shall stand directly in front but 4 feet from the test shirt. The observer shall then compare the test shirt in each of the areas specified in 3.4 to the photographic standards and shall assign a rating value to each of the specified areas. The rating value assigned to an area by the observer shall be the numerical value of the photographic standards that most nearly matches the area. Seams appearing to fall between the numerical values of the photographic standards may be rated 2.5, 3.5, or 4.5. Each rating value assigned by each of the observers shall be recorded. The average of the three rating values assigned by the three observers to the same area shall be the rating value for that area.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each fully buttoned shirt shall be neatly folded to approximately 14-1/2 inches by 10-1/2 inches. The folded shirt shall be secured with stainless steel (Type 304) pins, tin or nickel plated brass pins, aluminum clips, or plastic fasteners. (Note: Type 304 is a designation of the American Iron and Steel Institute, 150 East 42d Street, New York, New York 10017.) Each shirt shall be inserted in a snug-fitting flat style bag made of clear polyethylene that is 0.00125 inch thick (plus or minus 20 percent). The bag shall be formed with heat-sealed seams that are straight and continuous and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed as close as possible to the open end. A 1/4-inch-diameter hole shall be made at one corner of each bag to allow excess air to escape. As an alternative, the final closure of the bag may be accomplished by a tuck or reverse flap.

5.1.2 Level C. Shirts shall be packaged to afford adequate protection against deterioration and physical damage during shipment from the supply source to the first activity. The supplier may use his standard practice when it meets these requirements.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

* 5.2.1 Level A. Seventy-two shirts of one size and class only, packaged as specified, shall be packed in a shipping container assembled, closed, and reinforced in accordance with class weather-resistant, grade V2s, size 3A of

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

MIL-B-17757. The fiberboard for the liner shall conform to type CF, class weather-resistant, variety DW, grade V15c of MIL-B-17757. Level A packages shall be packed flat, front up, collars alternated front to rear, two in length, one in width, and 36 in depth within the shipping container. Each shipping container shall have its contents completely covered on the top and the bottom with a sheet of 30-pound minimum basis weight paper conforming to grade B of UU-P-268. Toward the end of the contract or if the quantity of shirts of one size is less than the quantity required per shipping container, mixed sizes (see 5.3.2) may be packed within the same shipping container.

* 5.2.2 Level B. Seventy-two shirts of one size and class only, packaged as specified, shall be packed in a shipping container assembled and closed in accordance with class domestic, grade 200, size 3A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic, variety DW, grade 275 of MIL-B-17757. Level A packages shall be packed flat, front up, collars alternated front to rear, two in length, one in width, and 36 in depth within the shipping container. Each shipping container shall have its contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight paper conforming to grade B of UU-P-268. Toward the end of the contract or if the quantity of shirts of one size is less than the quantity required per shipping container, mixed sizes (see 5.3.2) may be packed within the same shipping container.

5.2.2.1 Fiberboard shipping container. When specified (see 6.2), the shipping container shall be a grade V3c or V3s fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of the box specification. The shipping container material may also be grade V4s of PPP-F-320.

5.2.3 Level C. Shirts, packaged as specified, shall be packed in a manner to insure acceptance by the carrier and safe delivery at destination at the lowest transportation rate for such supplies. The containers shall be in accordance with the rules of carriers or the regulations applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene packages. Each polyethylene package (see 5.1.1) shall have the nomenclature, the stock number, the size, and the quantity of the items packaged therein legibly printed or stamped in black directly across the center face of the bag or on a white paper label inserted within the bag so that it is readable through the polyethylene.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:43Z
Check the source to verify that this is the current version before use.

5.3.2 Mixed sizes. Each shipping container packed with mixed sizes (see 5.2.1 and 5.2.2) shall have, securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 inches by 4 inches. The words "mixed sizes" shall be plainly stamped or printed on the label. The quantity and sizes of the shirts contained in the shipping container shall be legibly stamped or printed under the words "mixed sizes" on the label.

6. NOTES

* 6.1 Intended use. The class 1 shirt covered by this specification is intended to be worn by male military personnel of the Department of the Air Force and the Department of the Navy. The class 2 shirt covered by this specification is intended to be worn by male military personnel of the Department of the Navy.

* 6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification

(b) Class and size required (see 1.2 and 1.3)

(c) Pattern requirements (see 3.5)

(d) Requirements for testing materials and components (see 4.2.1)

(e) Selection of applicable levels of packaging and packing (see 5.1 and 5.2)

(f) Requirements for fiberboard shipping containers (see 5.2.2.1).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:43Z
Check the source to verify that this is the current version before use.

* 6.3 Figures. Figures 1 and 2 show the general design of the class 1 shirt and are furnished for information only. Figure 3 shows the general design of the class 2 shirt and is furnished for information only. In the event of conflict between the figures and the text of this specification, the text of this specification shall apply.

6.4 Marginal notations. The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This annotation was done as a convenience only, and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Air Force - 11
Navy - SA

Reviewer:
Air Force - 82

User:
Navy - CG

Preparing activity:
Air Force - 11

Project No. 8405-0611

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

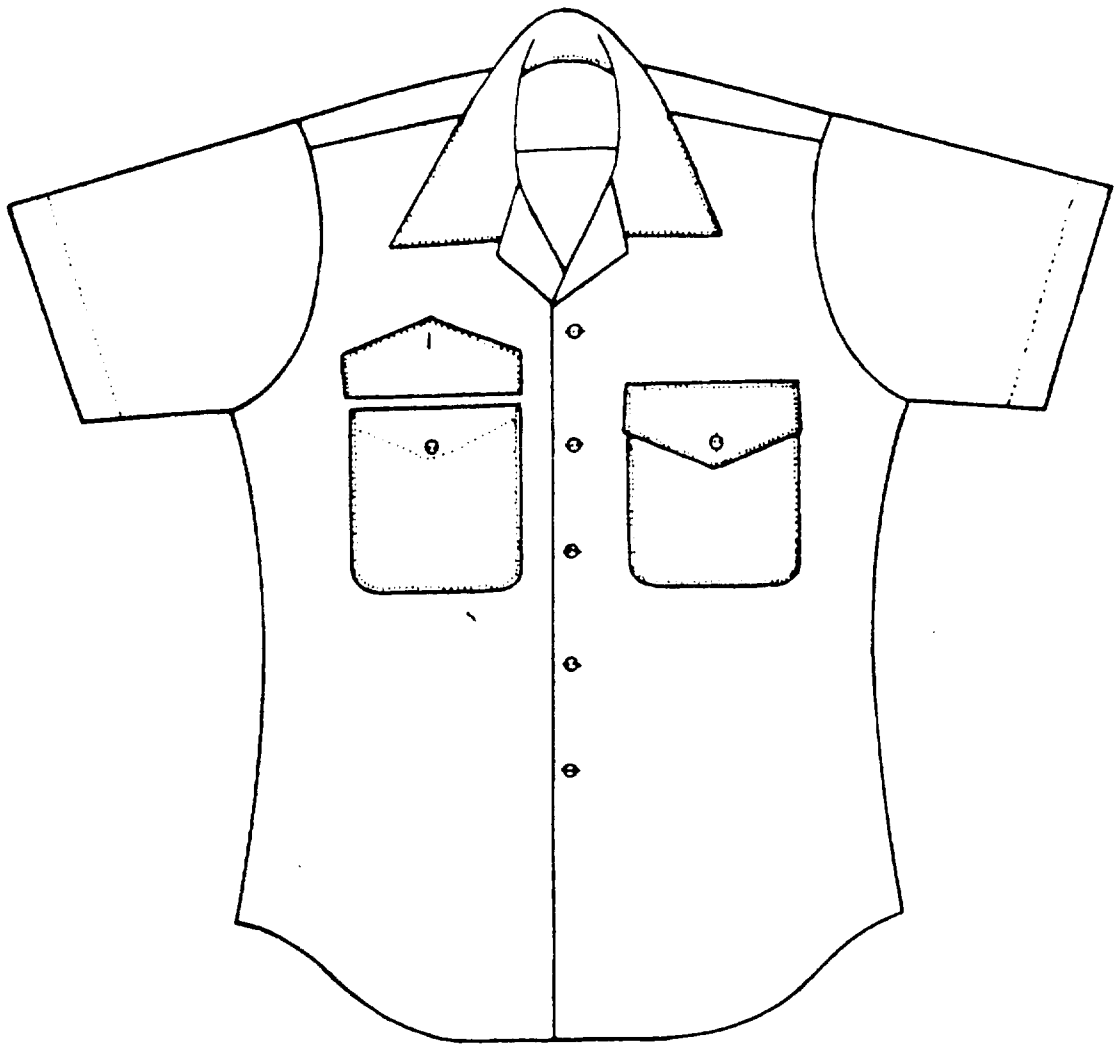


FIGURE 1. Class 1 Shirt (Front View)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

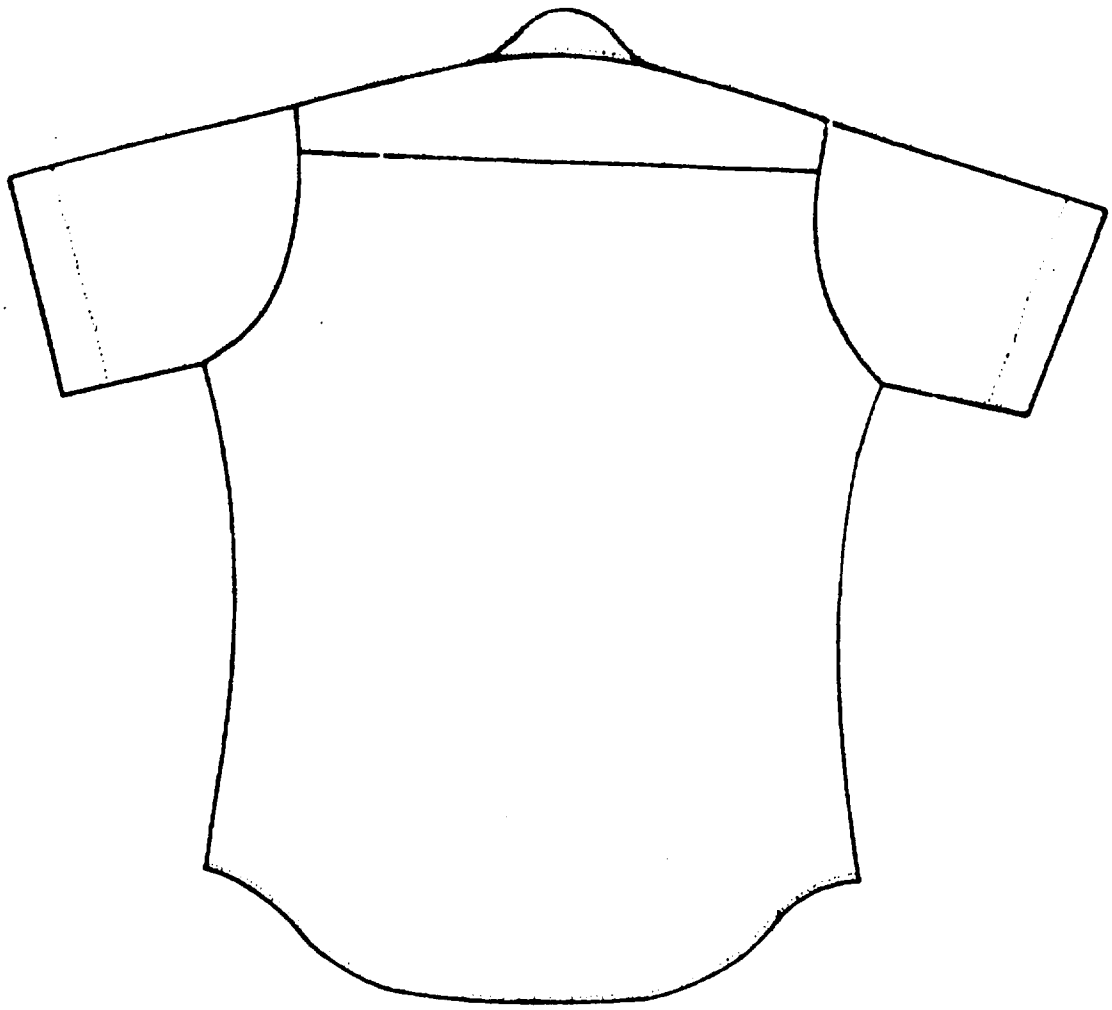


FIGURE 2. Class 1 Shirt (Back View)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

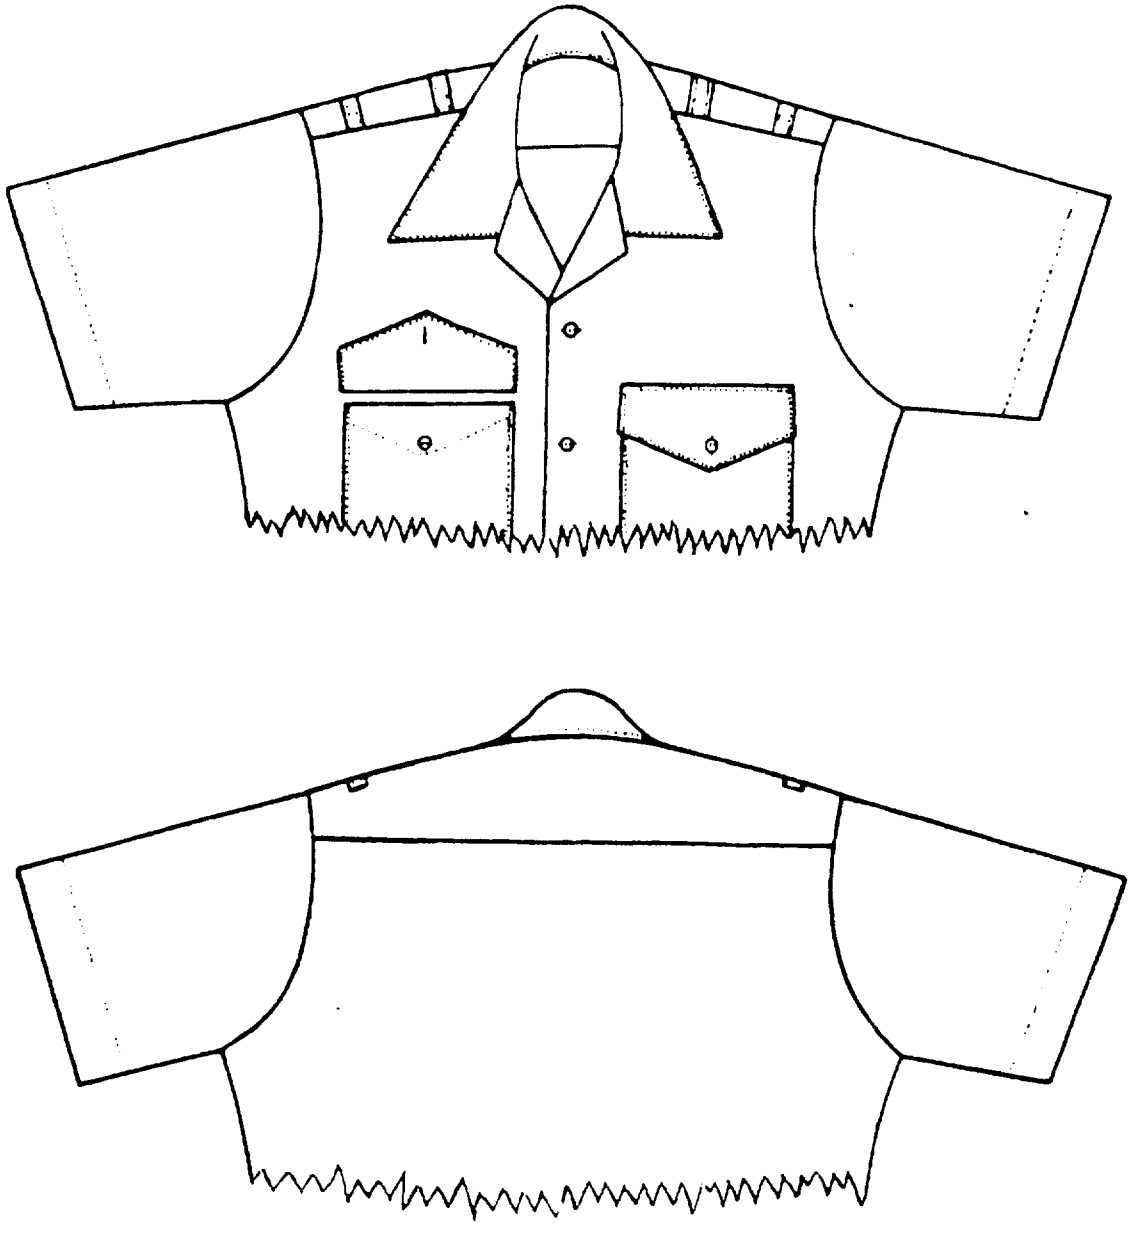


FIGURE 3. Class 2 Shirt

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE AIR FORCE

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 73236 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

ASD/ENESS
Wright-Patterson AFB, OH 45433

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil — Downloaded: 2026-10-26T04:43Z
Check the source to verify that this is the current version before use.