INCH-POUND

MIL-DTL-32809
4 February 2026

DETAIL SPECIFICATION

SLACKS, WOMEN'S – EVENING DRESS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers women's evening dress slacks for wear by female officers and staff non-commissioned officers (SNCO) of the United States Marine Corps.

1.2 Classification. The slacks are available in two types in the sizes specified (see 6.2).

1.2.1 Types.

Type I – Black with gold ornamental striping at the outseam (officer)

Type II – Sky blue with scarlet striping at outseam (SNCO)

1.2.2 Schedule of sizes. The slacks are available in the waist size and inseam length combinations of table I, as specified (see 6.2).

TABLE I. Schedule of sizes.

Body Styles	Lengths		
	Petite (P)	Regular (R)	Tall (T)
Junior	8, 10, 12, 14, 16	8, 10, 12, 14, 16, 18	6, 8, 10, 12, 14, 16, 18
Misses	8, 10, 12, 14, 16	0X, 2, 4, 6, 8, 10, 12, 14, 16, 18	6, 8, 10, 12, 14, 16, 18
Women's	8, 10, 12, 14, 16	6, 8, 10, 12, 14, 16, 18	6, 8, 10, 12, 14, 16, 18

1.2.3 Individual orders. When slacks are produced to an individual order, this specification will govern, except the dimensional requirements of section 3 may be modified to the extent necessary for good custom tailoring practices.

2. APPLICABLE PUBLICATIONS

2.1 General. The publications listed in this section are specified in sections 3 and 4 of this specification. This section does not include publications cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, users of this document are cautioned that they must meet all specified requirements of publications cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government publications.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these publications are those cited in the solicitation or contract.

Comments, suggestions, or questions on this document should be addressed to Marine Corps Systems Command, 2200 Lester Street, Quantico, VA 22134 ATTN: SEAL-MA-STDS or emailed to USMC_STDZ@usmc.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

Distribution Statement A. Approved for public release: distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:47Z
Check the source to verify that this is the current version before use.

COMMERCIAL ITEM DESCRIPTIONS

A-A-50198 - Thread, Gimp, Cotton, Buttonhole

A-A-50199 - Thread, Polyester Core, Cotton or Polyester-Covered

A-A-52094 - Thread, Cotton

A-A-52106 - Cloth, Twill or Plain Weave, Polyester and Polyester Blend

A-A-55634 - Zippers (Fasteners, Slide Interlocking)

A-A-59826 - Thread, Nylon

A-A-59994 - Button, Sewing Hole, and Button, Staple, (Plastic)

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-DTL-10176 - Cloth, Gabardine: Wool, Polyester and Wool

MIL-DTL-20271 - Lace, Gold – Ornamental

MIL-DTL-21115 - Cloth, Tropical: Wool, Polyester/Wool

MIL-DTL-29405 - Cloth, Broadcloth: Wool and Wool/Nylon

MIL-DTL-32075 - Label: For Clothing, Equipage, and Tentage, (General Use)

MIL-S-82155 - Stripe, Trousers, Dress

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-1488 - Provisions for Evaluating of Quality of Trousers

(Copies of these documents are available online at https://quicksearch.dla.mil.)

2.3 Non-Government publications. The following publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these publications are those cited in the solicitation or contract.

ASTM INTERNATIONAL

ASTM D6193 - Standard Practice for Stitches and Seams

(Copies of this document are available online at www.astm.org.)

2.4 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Inspections.

3.1.1 First article inspection. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.2.

3.1.2 Conformance inspection. When specified (see 6.2), a sample shall be subjected to conformance inspection in accordance with 4.3.

3.2 Standard sample. Standard samples, when provided, are furnished solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample, in which case this specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:47Z
Check the source to verify that this is the current version before use.

3.3 Design. The slacks have a two-piece waistband with a hook and eye closure (see 3.5.5), an outlet at the seat seam, an outlet at the inseam from the crotch tapered to the knee, one watch pocket, a French-type fly (see 3.3.1) with a slide fastener, front and back darts, with unhemmed overedged bottoms. The stripes for type I slacks have ornamental gold lace attached at the outseams, and type II slacks have scarlet stripes attached at the outseams (see 3.5.9).

3.3.1 French-type fly. The front closure on the slacks has fabric behind the slide fastener secured inside the waistband with a button (see 3.5.7). The French-type fly is formed by using a flap-style left fly with an integrated waistband button/buttonhole.

3.4 Figures. Figure 1 through figure 6 are provided for information only. When inconsistencies exist between the written specification and the figures, the written specification shall govern.

3.5 Materials and components.

3.5.1 Recycled, recovered, environmentally preferable, or biobased materials. Recycled, recovered, environmentally preferable, or biobased materials should be used to the maximum extent possible, provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.5.2 Basic material.

3.5.2.1 Type I. The basic material for type I slacks shall be cloth, tropical, polyester/wool blend, black, shade 2607 (see 6.3), conforming to type III, class 1 of MIL-DTL-21115.

3.5.2.2 Type II. The basic material for type II slacks shall be polyester/wool gabardine cloth, sky blue, shade 2319 (see 6.3), conforming to type II, class 12 of MIL-DTL-10176.

3.5.3 Interfacing. The interfacing used on the waistband and fly shall be a heavyweight fusible polyester or polyester blend. At least 47 percent of a blend shall be polyester, with the other components being cotton, rayon, or both.

3.5.4 Zipper. Zipper shall be type I, style 3-4 (brass) or size 2 (polyester or nylon chain) in accordance with A-A-55634. The zipper shall be 8 inches for all sizes of slacks. Unless otherwise specified (see 6.2), the color of the slide fastener tape shall be a good match to the basic material.

3.5.5 Hook and eye. The hook and eye for the waistband closure shall be a nickel-plated hook with a width of 0.3±0.01 inch and an applicable nickel-plated eye with associated backing plates when tested as specified in 4.4.1 (see 6.4). The hook and eye, and any associated attachment pieces, shall not be visible on the outside of the slacks when worn.

3.5.6 Thread. The threads used in the construction of the slacks shall conform to the requirements of the thread documents cited in table II when tested as specified in 4.4.1. When more than one option is presented, either may be used. Unless otherwise specified (see 6.2), the thread shade for all stitching except for the attachment of the ornamentation shall be a good match to the shade of the basic material (see 3.5.2). The thread used for stitching the ornamentation to the slacks shall be yellow (goldenlite), shade AJ, cable no. 66051 for the gold lace.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:47Z
Check the source to verify that this is the current version before use.

TABLE II. Thread requirements.

Use (stitch type)	Description	Document	Tex	Ply
Seaming (stitch type 301 and 401), raise, edge, and topstitching	Cotton-covered polyester core	A-A-50199, type I	36–45 for needle	2
			36–45 or 31–35 for bobbin	
Overedging (stitch type 504)	Cotton-covered polyester core	A-A-50199, type I	31–35 for needle and looper	2
	Cotton, soft	A-A-52094, type I	30 for needle and looper	3
Bartacks	Cotton-covered polyester core	A-A-50199, type I	36–45 for needle and bobbin	2
Buttonholes	Cotton, soft	A-A-52094, type I	40 for needle and bobbin	2
Buttons	Cotton, glazed	A-A-52094, type II	105 or 90	4
Buttons (automatic sew and wrap in one operation)	Nylon, waxed	A-A-59826, type III	Special no. 5	Monocord
Buttonhole reinforcement	Cotton gimp	A-A-50198, type I or type II	210	-

3.5.7 Button. The button for the inside of the waistband shall be composed of melamine formaldehyde conforming to type I, class 1, style 4, 20-ligne of A-A-59994, black unless otherwise specified (see 6.2), and in a glossy finish when tested as specified in 4.4.1.

3.5.8 Labels. The slacks shall have labels in accordance with 3.5.8.1 and 3.5.8.2. The labels shall show fastness to dry cleaning.

3.5.8.1 Identification-size instruction label. The combination identification-size instruction label shall measure not less than 5-1/2 by 2-1/2 inches and shall conform to MIL-DTL-32075, type VI, classes 1, 2, and 3 (combined) when tested as specified in 4.4.1. The location of the label shall be on the wearer's left side, near the watch pocket. The attachment stitching of the label shall not be visible on the outside of the slacks. The format of the label shall be as follows, and the specific content will be as applicable to the slacks being labeled:

SLACKS, WOMEN'S, EVENING DRESS

FIBER CONTENT: WOOL BROADCLOTH (EXAMPLE)

SIZE: M10R (EXAMPLE)

NSN: 8410-01-XXX-XXXX (EXAMPLE)

NAME OF CONTRACTOR:

CONTRACT NO. SPO-100-00-0-0000 (EXAMPLE)

DRY CLEAN ONLY

DO NOT USE HOT IRON FOR PRESSING

3.5.8.2 Barcode label. Each pair of slacks shall be individually barcoded with a paper label/tag conforming to MIL-DTL-32075, type VIII, class 17, when tested as specified in 4.4.1. The tag shall be attached to the item by a fastener. The barcoding element shall be a 13-digit National Stock Number (NSN) and the appropriate 12-digit Universal Product Code (UPC) assigned to the NSN by the Government. The initials "UPC" shall appear beneath the code. The barcodes for the NSN and UPC shall be a medium to high density and shall be located so they are completely visible on the item when the item is folded or packaged as specified herein. The label's location shall cause no damage to the item.

3.5.9 Striping. Materials for striping at the side seams of the type I slacks shall be ornamental gold lace conforming to MIL-DTL-20271, class 3. Materials for striping at the side seams of the type II slacks shall be scarlet broadcloth conforming to MIL-DTL-29405. Alternatively, finished stripes in accordance with MIL-S-82155 may be used for type II slacks.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:47Z
Check the source to verify that this is the current version before use.

3.6 Patterns. Standard patterns will be furnished by the Government as specified (see 6.2). Standard patterns show size and directional lines for cutting and are marked or notched for proper placement and assembly of component parts. The standard patterns shall not be altered in any way and shall be used for cutting the contractor's working patterns. The working patterns shall be identical to the standard patterns, except that additional notches for use during construction are permitted on the working patterns. When using automatic equipment, minor modifications are also permitted on the working patterns provided the modifications do not alter the dimensional, serviceability, or appearance requirements cited in this document or those governed by the standard pattern. The standard patterns provide a 3/8-inch seam allowance for all seams except for the seat and inseam outlet.

3.6.1 Pattern parts. Component parts shall be cut from the materials specified and in accordance with the number of parts specified in table III. Requirements for cutting component parts that are not included in table III are included in 3.6.2.

3.6.2 Cutting. The component parts shall be cut according to directional lines as indicated on the patterns provided and in the material specified. Front and back pieces shall be laid so that the directional lines are in the warp direction. The additional cutting requirements below should be followed for those components not controlled by a furnished pattern piece. For all parts visible on the outside during wear, parts should be cut from the same fabric lot to ensure that there are no differences in shade between parts.

a. Watch pocket may be cut from ends. When cut from ends, the parts should be a good match to the shade of the slacks.

b. Cut the ornamentation in the warp direction in the appropriate length to the outseam length of the slacks being produced.

c. Mark or ticket the component parts to ensure a uniform shade and size throughout the garment. Ensure the numbering does not show on the outside of the garment and, wherever possible, is covered by the seam allowance. An ink pad numbering machine, rubber stamp, or pencil may be used if the markings do not show in the finished item. Ensure the following methods are not used: corrosive metal fastening devices, sew-on shade tickets, and adhesive-type tickets that discolor or adhere to the material upon removal of tickets.

TABLE III. List of pattern parts.

Material	Nomenclature	Cut Parts
Basic material	Front	2
	Back	2
	Left fly	1
	Right fly	1
	Waistband	2
	Watch pocket	2
Interfacing	Right fly fusible	1
	Waistband fusible	1

3.7 Finished dimensions. The finished slacks shall conform to the measurements in table IV as defined in table V. As the slacks are delivered unhemmed, inseam measurements (E) shall be the length as marked on the label plus 3 inches (minimum). The tolerance for all measurements is ±3/8 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:47Z
Check the source to verify that this is the current version before use.





TABLE IV. Finished dimensions (inches).

Size	Waist	Hips			Outseam		
		Junior	Misses	Women	Petite	Regular	Tall
0X	22-1/2	-	34-1/2	-	-	45-3/8	-
2	23-1/2	-	35-1/2	-	-	45-1/2	-
4	24-1/2	-	36-1/2	-	-	45-5/8	-
6	25-1/2	35	37-1/2	39-1/2	-	45-3/4	48-3/4
8	26-1/2	36-1/2	38-1/2	40-1/2	42-7/8	45-7/8	48-7/8
10	28	38	40	42	43	46	49
12	29-1/2	39-1/2	41-1/2	43-1/2	43-1/8	46-1/8	49-1/8
14	31	41	43	45	43-1/4	46-1/4	49-1/4
16	33	43	45	47	43-3/8	46-3/8	49-3/8
18	35	45	47	49	-	46-1/2	49-1/2

Inseam measurements for all sizes of slacks	
Length (all sizes)	**Inseam length**
Petite	33
Regular	35
Tall	37

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:47Z
Check the source to verify that this is the current version before use.

TABLE V. Methods of measure.

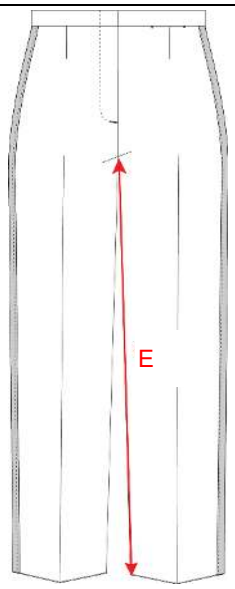Letter	Measurement	Method	Guidance
A	Waist	Twice the measurement taken across the center of the waistband from folded edge to folded edge.	
B	Hip	Twice the measurement taken across the slack from folded edge to folded edge, measured at 7 inches down the center of the front from the bottom of the waistband joining seam.	
D	Outseam	Measurement taken from the bottom edge of the waistband along the side seam to the unhemmed bottom of the leg.	
E	Inseam	Measurement taken along the inseam from the crotch seam to the unhemmed bottom edge.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:47Z
Check the source to verify that this is the current version before use.

3.8 Construction. Construction of the slacks shall conform to the requirements specified in table VI and manufactured in accordance with 3.9. A suggested table of operations is provided in 6.7.

TABLE VI. Construction requirements.

Construction Feature	Requirement 1/
Stitch and seam types	ASTM D6193 (suggested in 6.7).
Stitches per inch	Suggested in 6.7.
Thread type and size	Table II.
Thread tension	Maintained so that there is no tight, loose, or unbalanced stitching.
Thread shade on outside of slacks	Consistent thread shade on the outside of the slacks. Multiple shades of thread on the outside of the slacks are not allowed.
401 or 101 stitch type	The loops of the chain shall finish on the inside of the slacks.
Seams and seam allowances	Maintained with seam uniformly sewn so that no raw edges, runoffs, twists, pleats, puckers, gathers, other distortions, or open seams result.
Beginning and ending of seams	Start and finish evenly.
Joined components	Lie smooth and flat, unless otherwise suggested in 6.7.
Ends of seams and stitching – 301 stitch type	If not caught in another line of stitching: backstitched not less than 1/4 inch.
	If the end of a continuous line of stitching (except label): overlapped not less than 1/2 inch.
	If label stitching: overlapped not less than 3 stitches.
Thread breaks (all stitch types)	Secured by stitching the back of the break not less than 1/2 inch.
	If 401 stitch type, repaired using 301 stitch type.
Buttonholes	Eyelet end, taper-bar type, 3/4-inch cut length, clean cut.
	Well worked over gimp with the end securely tacked.
	The bar at the end has a minimum of four tacks, not including the first cross-overstitch.

FOOTNOTE:

1/ Paragraph 6.7 contains a suggested table of operations with appropriate finished appearance characteristics that have been determined by the government to be desired in the end item. Any deviation from the suggested characteristics should be reviewed and approved by the government prior to use in production, as specified (see 6.2). Unapproved deviations could lead to an end item that does not have the appearance requirements cited in 3.9.12.

3.9 Manufacturing operations requirements. Although a suggested table of operations is provided in 6.7, an exact sequence of operations is not specified in order to allow for manufacturers to utilize their own best practices and quality plans. The finished slacks shall be required to meet all construction requirements cited in table VI, as well as finished measurement requirements. Unless otherwise specified (see 6.2), seam allowances shall be as cited in 3.6. Finished appearance shall be as specified in 3.9.1 through 3.9.13. All parts of the slacks shall finish without pleats, puckers, gathers, excessive fullness, or other distortions.

3.9.1 Darts. The darts shall be properly positioned and finished without pleats, puckers, or gathers. In the finished slacks, the darts shall be well tapered to a flat point at the lower end.

3.9.2 Label attachment. The stitching shall be uniform and secure, and the label shall be legible after attachment. The barcode label/tag shall be located so that it is completely visible on the item when folded/packaged.

3.9.3 Outseams. Outseams shall be carefully joined with notches matching. The seams shall start and finish evenly and lie smooth and flat.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:47Z
Check the source to verify that this is the current version before use.

3.9.4 Ornamentation. Ornamentation shall be centered over the outseam on the slacks from the top edge of the slacks to the bottom edge of the legs with the top end to finish in the waistband seam. The ornamentation shall be securely and uniformly stitched, properly positioned, and shall have no distortion.

3.9.5 Waistband. The waistband shall be sewn on smoothly and evenly and shall have a flat appearance throughout without gathers, puckers, pleats or other distortions in the front part or back part of the waistband, and shall be even in width along the entire length. The waistband shall be 1-1/4±1/8 inches wide.

3.9.6 Hook and eye closure. In the finished slacks, the closure shall not bulge, pucker, or twist when the hook and eye is engaged.

3.9.7 Watch pocket. The completed watch pocket opening shall not be stretched, and the material shall not be exposed on the outside. The watch pocket shall be properly positioned and securely sewn without pleats, puckers, or other distortions.

3.9.8 Inseam. Inseams shall be carefully joined with notches matching and without twists or puckers. The seams shall start and finish evenly and lie smooth and flat.

3.9.9 Crotch and seat seam. The crotch and seat seams shall be joined with a stitch tension of sufficient elasticity to meet the strain of sitting and stooping. The waist shall be measured before joining the crotch and seat seam to ensure correct waist size. In the finished slacks, the inseams shall meet, and the left and right waistband joining seams shall be aligned. The base of the right fly shall cover the left fly on the outside. The inseam at the crotch shall not stagger more than 1/4 inch.

3.9.10 Bartacks. The slacks shall not be distorted by the bartacks. The pocket shall lie smooth and flat. The bartacks shall be properly positioned and correctly placed to reinforce the points of strain, as applicable, in 6.7 and in the patterns. Bartacks shall be 3/8 to 1/2 inch long and stitched through all plies of the material at the point of the bartacking.

3.9.11 Button (inside waistband). The button shall be securely sewn and properly aligned with the buttonhole. Hand-sewn buttons shall be shank wrapped three times, and the thread shall be securely tacked with not less than two stitches. Machine sewn buttons, which are automatically shanked, shall have a minimum of ten wraps with three locking stitches. Shank wrapping is optional on machine-sewn buttons.

3.9.12 Finished appearance. The flies shall be even in length where they join the crotch seam. The zipper parts shall be set so that there is no twisting or puckering when fly is closed. Finished slacks shall present a proper military appearance that is consistent and uniform in all aspects, within suggested tolerances.

3.9.13 Pressing and cleanliness. All pressing shall be done with a heated pressing iron or pressing machine to obtain the desired appearance in accordance with good manufacturing practice. All ends of stitching shall be trimmed, and all loose threads, spots, stains, and shade tickets or markings shall be removed without injury to the material.

3.10 Workmanship. Each finished pair of slacks shall conform to the quality of product established by this document. Defects shall not exceed the established maximum Acceptance Quality Limits (AQL), as specified (see 6.2), and shall not adversely affect the serviceability, appearance, and uniformity of the product.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2).

b. Conformance inspection (see 4.3).

4.2 First article inspection. First article inspection shall be performed on the slacks when a first article sample is required (see 3.1.1). This inspection shall include the examinations and tests of 4.4.1 through 4.4.4 for compliance with design, configuration, workmanship, dimensional requirements, and testing as specified in this document.

4.2.1 First article samples and acceptance criteria. The first article sample size shall be as specified (see 6.2). The sample unit shall be one pair of finished slacks. The lot size shall be expressed in units of slacks. The presence of defects exceeding specified AQLs (see 3.10 and 6.2) or failure of any testing (see 6.2) shall be cause for rejection of the first article.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:47Z
Check the source to verify that this is the current version before use.

4.3 Conformance inspection. Unless otherwise specified in the contract (see 6.2), conformance inspection, in accordance with 3.1.2, shall consist of the examinations and tests of 4.4.1 through 4.4.4.

4.3.1 Component and material sampling and acceptance criteria. Unless otherwise specified in referenced documents or procurement documents (see 6.2), sampling shall be in accordance with table VII. The component lot shall be unacceptable if one or more sample units fail to meet any examination or test requirements specified in this document (see 6.2).

TABLE VII. Material sampling.

Lot size	Sample size (sample units)
800 or fewer	2
801 through 22,000	3
22,001 and over	5

4.3.2 End item sampling and acceptance criteria. Unless otherwise specified in the contract (see 6.2), sampling for inspection shall be performed for dress/semi-dress (D/S) slacks in accordance with the provisions of MIL-STD-1488. The sample shall be one pair of finished slacks. The lot size shall be expressed in units of slacks. The presence of excessive defects or failure of any testing as specified (see 6.2) shall be cause for rejection of the lot.

4.4 Inspection methods.

4.4.1 Component and material examinations and tests. In accordance with 4.1, components and materials shall be examined and tested as specified in table VIII unless otherwise excluded, amended, or modified in this document or as specified (see 6.2).

TABLE VIII. Component and material verification.

Material/Component	Requirement	Verification
Basic material	3.5.2	MIL-DTL-29405
Interfacing	3.5.3	A-A-52106
Zipper	3.5.4	A-A-55634
Hook and eye	3.5.5	Visual (see 6.4)
Threads	3.5.6	Per specific thread specification listed in table II
Thread shade	3.5.6	Visual 1/
Buttons	3.5.7	A-A-59994
Button shade	3.5.7	Visual 1/
Label	3.5.8.1 and 3.5.8.2	MIL-DTL-32075
Striping	3.5.9	Per specific striping specification listed in 3.5.9
FOOTNOTE: 1/ Results recorded as pass or fail.		

4.4.2 In-process examination. Visual and dimensional examinations shall be made at any point during the manufacturing process to determine whether construction details, which cannot be examined in the finished product, are in accordance with the requirements specified in section 3. Materials and components that contain defects and damages, as defined in the visual examination of 4.4.3, shall be removed from production. Any in-process nonconformance remaining in the finished slacks shall be classified as a defect in accordance with the visual examination of 4.4.3.

4.4.3 Visual examination. Sampling and visual examination of the end item for defects in color, design, materials, construction, workmanship, and marking shall be performed in accordance with the provisions for D/S slacks of MIL-STD-1488.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:47Z
Check the source to verify that this is the current version before use.

4.4.3.1 Additional defects. The end items shall be examined for the following labeling defects, which are not listed in MIL-STD-1488. These defects shall be scored as minor.

a. Barcode omitted or not readable by scanner.

b. Human readable interpretation omitted or illegible.

4.4.4 Dimensional examination. The slacks shall be examined for conformance to the dimensions specified in table IV, when measured in accordance with table V, in accordance with the provisions of MIL-STD-1488.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The slacks are intended to be worn by female personnel of the United States Marine Corps.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. NSNs.

c. Types, sizes, and lengths required (see 1.2).

d. When first article inspection is required (see 3.1.1).

e. When conformance inspection is required (see 3.1.2 and 4.3).

f. Color of the slide fastener tape, if other than specified (see 3.5.4).

g. Thread shade, if other than specified (see 3.5.6).

h. Button color, if other than specified (see 3.5.7).

i. Applicable Government pattern references, with pattern date (see 3.6).

j. Seam allowances, if other than as specified in 3.6 (see 3.9).

k. Any operations deemed necessary to be specified (see 3.9).

l. Approved deviation(s) from the finished appearance characteristics in 3.9.12 (see table VI).

m. AQLs (see 3.10).

n. First article sampling and acceptance criteria (see 4.2.1).

o. Component and material sampling and acceptance criteria (see 4.3.1).

p. End item sampling and acceptance criteria (see 4.3.2).

q. Component and material examination and tests (see 4.4.1).

r. Packaging requirements (see 5.1).

6.3 Information requests. Requests for information such as purchase descriptions, patterns, drawings, and standard shade samples of cloth can be made by completing and submitting the Defense Logistics Agency Troop Support's Clothing and Textile Specification/Drawing/Pattern Request Form online at https://www.dla.mil/TroopSupport/ClothingandTextiles/SpecRequest.aspx. Requests to use equivalent materials or components or to make changes to the pattern should be sent to the contracting officer for approval by the military services.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:47Z
Check the source to verify that this is the current version before use.

6.4 Hook and eye suggested sources of supply. A known source for hook and eye fasteners and associated attaching pieces that meet the requirements of this specification is listed below:

Snapco Manufacturing Corporation

140 Central Avenue

Hillside, NJ 07205

Phone: 973-282-0500

Fax: 973-282-7627

http://snapcofasteners.com/hookandeye.html

Reference: No. 8 hook and no. 85 eye with associated reinforcement pieces

6.5 Hem allowance. An allowance of 3 inches for hemming is included in the inseam length (see 3.7).

6.6 Certificates of compliance. Certificates of compliance may be accepted in lieu of testing at the discretion of the contracting agency. Manufacturers are advised to confirm acceptability of certificates of compliance prior to submitting them to address any requirement.

6.7 Suggested table of operations. Table IX is provided as a suggested table of operations. While it is not required that these operations be followed as presented, this table has been reviewed and demonstrated to produce a garment that meets the requirements of this specification. Stitch types, stitches per inch and overall appearance information in table IX represents the desired characteristics of a slack with the necessary characteristics.

6.8 Subject term (key word) listing.

Marine Corps
Uniform

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:47Z
Check the source to verify that this is the current version before use.

TABLE IX. Manufacturing operations.

No.	Operation	Stich Type	Seam Type	Stiches per inch	Needle	BOB/ LPR
1.	Cutting.					
	a. Cut the slacks in accordance with the patterns furnished by the Government.					
	b. Cut the material in the direction indicated by the directional lines on the patterns. Lay fronts and backs so that the directional lines are in the warp direction. The directional lines may deviate from the warp direction by not more than 1 inch on both fronts and backs. Measurements should be taken from the top and bottom of the directional line on the patterns to the selvage edge of the fabric, and the difference between the two measurements should not exceed the tolerance specified.					
	c. Cut the component parts for the slacks from one piece of the basic material, except the watch pocket may be cut from ends that harmonize with the shade of the slacks.					
	d. Cut the ornamental stripes to the required length.					
2.	Replacement of damaged parts.					
	a. Replace any part containing damages at time of cutting, such as holes or serious weakening defects such as smashes, multiple floats, and slubs likely to develop into holes.					
	b. Replace any part damaged during the manufacturing process by needle chews (such that the damage may be expected to develop into a hole), scissors or knife cuts, tears, holes, mends or burns, and large exposed drill holes.					
3.	Shade marking.					
	a. Mark or ticket the component parts to ensure a uniform shade and proper assembly throughout the slacks, except those parts specified in operation 1.c, which may be cut from ends and need not match each other. Ticket should conform to 3.6.2.					
4.	Overedge stitch slacks.					
	a. Overedge stitch the inseam and outseam of the front of the slacks. The overedge stitching of the inseam of the right front should extend from the bottom of the slacks to the fly. The overedge stitching of the outseam of the fronts should extend from the top of the waist to the bottom of the slacks leg.	503 or 504	EFd-1	6-10	70/2	70/2
	b. Overedge stitch the inseam and outseam of the back part of the slacks.	503 or 504	EFd-1	6-10	70/2	70/2
	c. Overedge stitch the inner waistband bottom edge, watch pocket, and bottom of the slack leg opening.	503 or 504	EFd-1	6-10	70/2	70/2
	d. Overedge stitch the crotch seam and seat seam.	503 or 504	EFd-1	6-10	70/2	70/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:47Z
Check the source to verify that this is the current version before use.

TABLE IX. Manufacturing operations – Continued.

No.	Operation	Stich Type	Seam Type	Stiches per inch	Needle	BOB/ LPR
5.	Make left fly.					
	a. Position the interfacing on the right fly, overedge stitch the back edge of the interfacing and fly together.	503 or 504	EFd-1	6-10	70/2	70/2
	b. Attach the right fly to the right front, matching notches. Stitch with a 3/8-inch seam.	301 or 401	LSbj-2	12-16	A	A
	c. Press the seam allowance towards the fly and edgestitch 1/16 inch from the finished seam edge.	301	SSe-1	12-16	A	A
6.	Make right fly.					
	a. The fly consists of two ply of basic material.					
	b. Seam the left fly together face to face with 3/8-inch seam, turn out the fly forcing out the corners.	301	Ssa-1	12-16	A	A
	c. Position zipper tape on the left fly, attach the left fly to the left front, matching notches. Stitch with a 3/16-inch seam.	301	Ssa-1	12-16	A	A
	d. Press seam allowance towards the left front and edgestitch 1/16 inch from the zipper tape edge.	301	SSe-1	12-16	A	A
7.	Assemble left and right flies.					
	a. Position the flies with the notches at the lower end matching, and seam the crotch 2 inches from front notch towards crotch point to hold left and right fronts together.	301	Ssa-1	12-16	A	A
8.	Make watch pocket and attach label.					
	a. The watch pocket should be made of two pieces of basic material and overedged stitched together	301	Ssa-1	12-16	A	A
	b. Stitch the label to the outside of the front half of the watch pocket on all four sides. The position of the label on the finished slacks is centered, a minimum of 1/2 inch below the finished pocket opening.	301	LSBj-1	12-16	A	A
9.	Seam darts.					
	a. Fold the front and back darts and seam lengthwise along the entire length of the dart, tapering to a point at the lower end as indicated by the marks on patterns.	301	OSf-1	12-16	A	A
	b. Press darts smooth and flat with a heated pressing iron or pressing machine.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:47Z
Check the source to verify that this is the current version before use.

TABLE IX. Manufacturing operations – Continued.

No.	Operation	Stich Type	Seam Type	Stiches per inch	Needle	BOB/ LPR
10.	Attach watch pocket.					
	a. Position the pocket on the outside of the left front at the pocket notch for the pocket opening. Seam the front part of the pocket only to the front of the slacks 3/8 inch from the top edge, from notch to notch.	301	SSe-2 (a)	12-16	40/3	A
	b. Extend the depth of the notch to the seam. Turn the pocket to the inside of the front of the slacks and edgestitch the pocket opening 1/8 inch below the top edge.	301	SSe-2 (b)	12-16	40/3	A
	c. Securely tack the ends of the pocket opening through the front of the slacks and the front and back of the pocket.	301	SSa-1	12-16	A	A
	In the finished slacks, the notch for the pocket opening should not be exposed, and the edge of the opening should meet the lower edge of the waistband. The pocket opening (after bartacking) should be 2-3/4±1/8 inches, and the depth of the pocket should be 3-3/4±1/4 inches.					
11.	Join fly assembly to fronts.					
	a. Position the zipper on the right fly with bottom end of zipper teeth 1/4 inch above the fly notch and the tops even.					
	b. Position the zipper on the right fly 1/2 inch from finished fly edge, stitch the zipper.	301	LSq-2 (a)	12-16	A	A
	c. Stitch the right fly to the right front, starting at the top and continuing with a curve to the bottom notch. The stitching shall be 1-3/8 inches from the front edge of fly.	301	SSa-1	12-16	A	A
12.	Join outseams.					
	a. Join the outseam with a 3/8-inch seam, matching the notches as indicated by the marks on the patterns.	301 or 401	SSa-1 (b)	12-16	A	A
	b. Spread open the outseams from the top edge of the slacks to the bottom and press smooth and flat with a heated pressing iron or pressing machine.					
13.	Attach ornamentation.					
	a. Stitch the ornamentation to the slacks from top to bottom 1/16 to 1/8 inch from each edge of the braid.	301	SSas-4 (b)	12-16	A	A
14.	Sew waistband to slacks.					
	a. The waistband should be made of one ply of basic material.					
	b. Position the interfacing on the waistband and overedge stitch the bottom inside edge. Fold the waistband in half lengthwise face to face with the ends even.					
	c. Seam the waistband to the slacks 3/8 inch from the edge along the unfinished edge of the waistband.	301	SSa-1	12-16	A	A
	d. The raw left and right front ends of the waistband extend 3/8 inch beyond the front edge of the finished fly edges.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:47Z
Check the source to verify that this is the current version before use.

TABLE IX. Manufacturing operations – Continued.


No.	Operation	Stich Type	Seam Type	Stiches per inch	Needle	BOB/ LPR
14.	Sew waistband to slacks. (cont.)					
	e. Seam the ends of the waistband face to face, turn out the waistband, forcing out the corners. Finished edges of waistband align with the finished edges of the flies.	301	SSa-1	12-16	A	A
	f. Topstitch the waistband to the slacks 1/16 inch along the lower finished edge catching the overedge stitched portion on the waistband in the stitching.	301	BSf	12-16	A	A
	g. Topstitch the upper edge of the waistband and the center front edges 1/16 inch.					
15.	Attach hooks and eyes.					
	a. Position the hook at the center 1/4 inch of the right waistband with the rolled edge of the hook aligned with the zipper teeth. Attach the hook to the right waistband through the proper reinforcement.					
	b. Position the eye at the center of the left waistband aligned with the zipper teeth and corresponding the with hook and right waistband. Attach the eye to the left waistband through the proper reinforcement.					
16.	Join inseam.					
	a. Join the inseam from the bottom edge of the legs to the crotch with the notches matching as indicated by the marks on the patterns, forming an outlet tapering the seam allowance of the back from 1 inch at the crotch to 3/8 inch at the knee notch.	401	SSa-1	12-16	A	A
	b. Press the inseam open.					
17.	Join crotch and seat seam.					
	a. Measure the waist to the proper size before joining the crotch, seat, and waist seam.					
	b. Join the crotch and seat seams from the end of the existing 2-inch long crotch stitching using a 3/8-inch seam. Spread open the crotch and seat seam and press smooth and flat. The inseam at the crotch shall not be staggered by more than 1/4 inch.	401	SSa-1	12-16	A	A
18.	Bartack slacks.					
	a. Bartack both ends of the watch pocket opening. Bartacks for the watch pocket should be vertical.	Bartack				
	b. Bartack the bottom end of the fly horizontally through all plies at the juncture of the crotch seam and fly.	Bartack				
	c. Bartack the front edge of the left fly to the back of the right fly with a vertical bartack, with the lower end of the bartack approximately 3/4 inch above the horizontal bartacks at the base of the fly.	Bartack				
19.	Sew button to slacks.					
	a. Sew a 20-line button on the waistband on the right side inside ply centered 2-3/4 inches from finished edge of waistband.	101 or Hand			20/4	20/4
	b. Make buttonhole. Make an eyelet-end taper-bar type buttonhole with a 3/4-inch cut opening through the waistband on the left side 1/2 inch from finished edge.	Buttonhole				

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:47Z
Check the source to verify that this is the current version before use.

TABLE IX. Manufacturing operations – Continued

No.	Operation	Stich Type	Seam Type	Stiches per inch	Needle	BOB/ LPR
20.	Press slacks.					
	a. Press the top and fly smooth and flat.					
	b. Press, smooth, and crease the legs in the center with the seams matching at the bottom and in the crotch or the inseam in the crotch may be slightly back of the outseam.					
	c. Close the fly and waistband.					
21.	Clean slacks.					
	a. Trim all ends from the stitching and remove all loose threads. Remove all spots, stains, and shade tickets or markings without injury to the material.					


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:47Z
Check the source to verify that this is the current version before use.

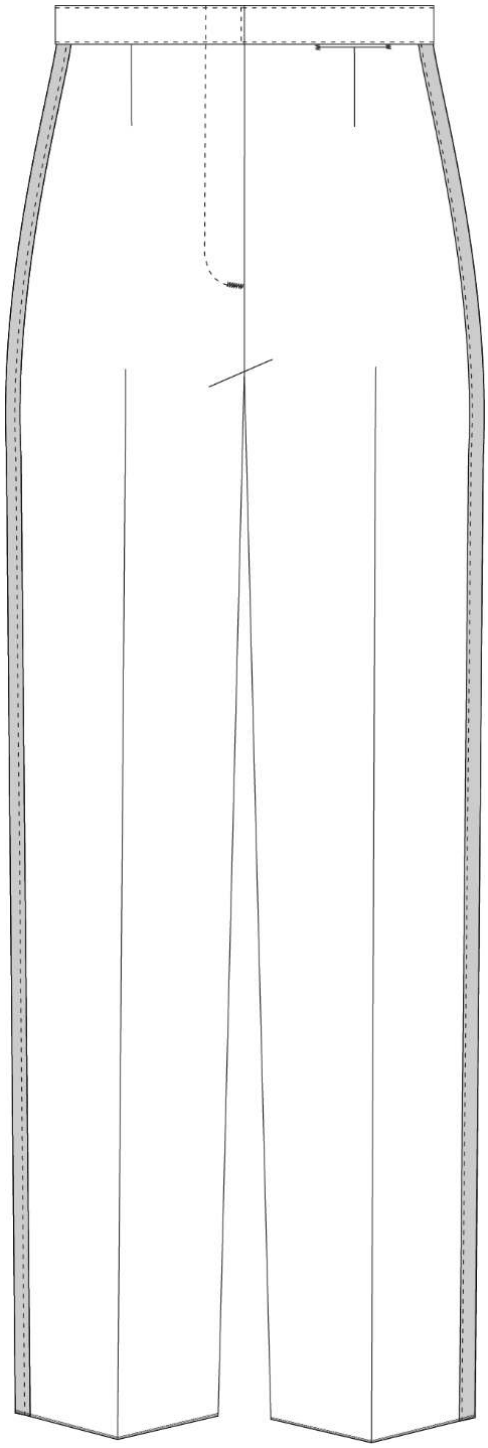

NOTE: Stripe design is dependent upon type, but placement is consistent for both types.

FIGURE 1. Women's evening dress slacks (SNCO and officer) – front.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:47Z
Check the source to verify that this is the current version before use.

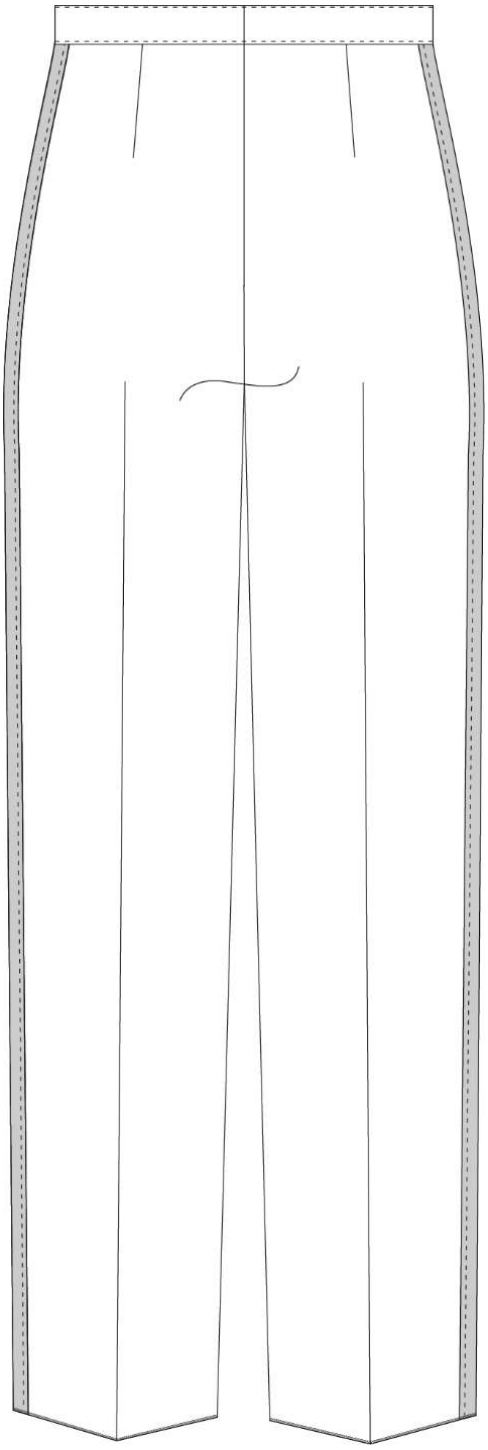

NOTE: Stripe design is dependent upon type, but placement is consistent for both types.

FIGURE 2. Women's evening dress slacks (SNCO and officer) – back.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:47Z
Check the source to verify that this is the current version before use.

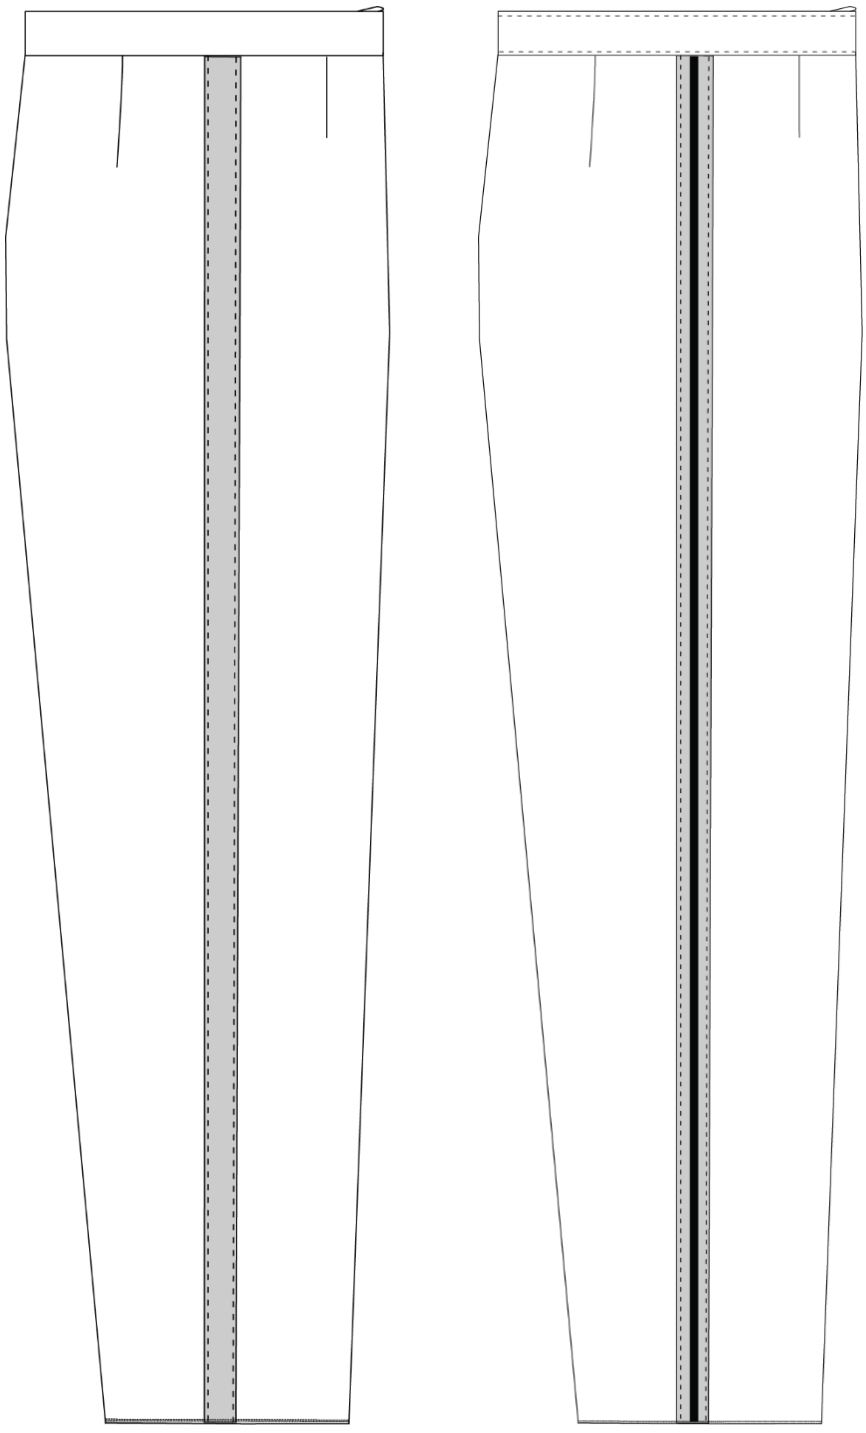


FRONT

SNCO stripe

Officer stripe

FIGURE 3. Women's evening dress slacks (SNCO and officer) – right side.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:47Z
Check the source to verify that this is the current version before use.

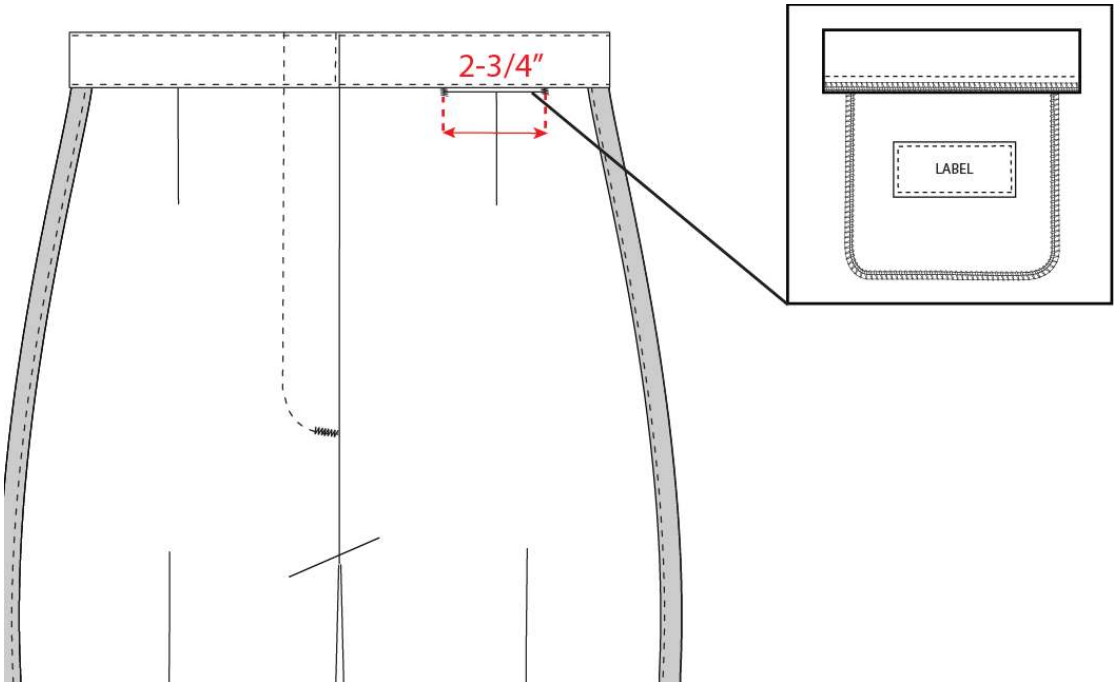

NOTE: Stripe design is dependent upon type, but placement is consistent for both types.

FIGURE 4. Women's evening dress slacks (SNCO and officer) – watch pocket.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:47Z
Check the source to verify that this is the current version before use.

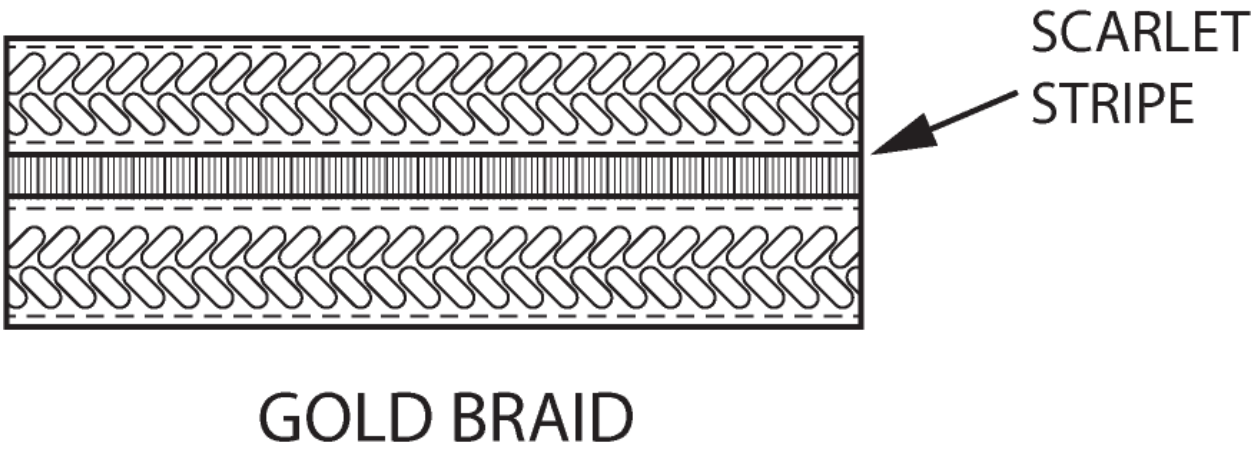


FIGURE 5. Women's officer's evening dress slacks – gold braid.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:47Z
Check the source to verify that this is the current version before use.

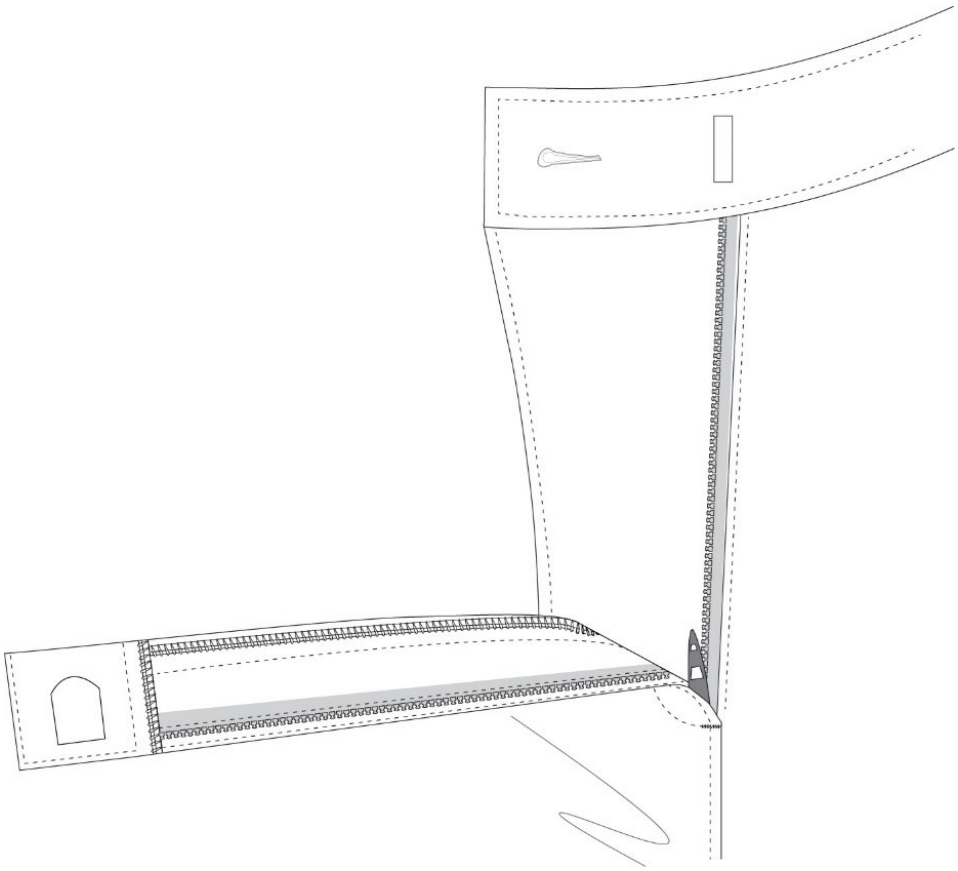


FIGURE 6. Women's evening dress slacks (SNCO and officer) – fly and inside front features.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:47Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – GL
Navy – MC

Preparing activity:
Navy – MC
(Project 8410-2026-001)

Review activities:
Army – AV, MI
Navy – CG1, NU
DLA – CT

Civil agency:
GSA – FAS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:47Z
Check the source to verify that this is the current version before use.