INCH-POUND
MIL-PRF-32818/1
25 August 2026

PERFORMANCE SPECIFICATION SHEET

CAPACITOR, FIXED, CERAMIC DIELECTRIC (GENERAL PURPOSE AND TEMPERATURE STABLE), HORIZONTALLY STACKED, STANDARD RELIABILITY AND HIGH RELIABILITY, SIZE 2220

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-32818.

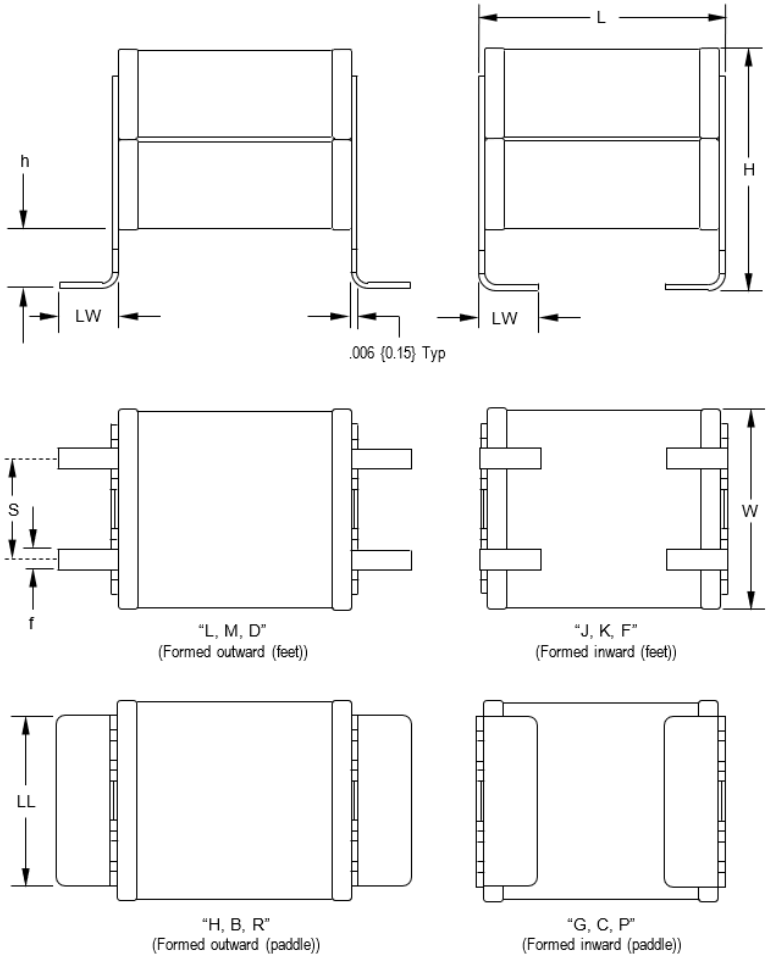


FIGURE 1. Size 2220 stacked capacitors.

AMSC N/A
FSC 5910
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:48Z
Check the source to verify that this is the current version before use.

Dimensions, inch (mm)							
L (max.)	W (max.)	H (max.)	h (min.)	f ± .012 (0.30)	LW ± .012 (0.30)	LL (min.) (see note 3)	S ± .012 (0.30)
.292 (7.42)	.222 (5.64)	See table I	.035 (0.89)	.020 (0.51)	.063 (1.60)	.149 (3.78)	.100 (2.54)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in millimeters and are given for information only.
3. Shall not exceed the footprint of the chip.

FIGURE 1. Size 2220 stacked capacitors - Continued.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Capacitance value: See table I.

Capacitance tolerance: See table I and MIL-PRF-32818.

Characteristic: E1 = C0G and E2 = X7R as specified in MIL-PRF-32818.

Rated voltage (V_{dc}): X = 10; Y = 16; Z = 25; A = 50; B = 100; C = 200, E = 500.

Operating temperature range: -55°C to +125°C.

Configuration: Lead frame styles J, L, G, H, K, M, C, B, F, D, P, and R (see figure 1 and MIL-PRF-32818).

Product level designator: M, T, and U as specified in MIL-PRF-32818.

Electrode: P and B as specified in MIL-PRF-32818.

Marking: In accordance with MIL-PRF-32818.

TABLE I. Size 2220 capacitor characteristics.

Part or Identifying Number (PIN) 1/	Capacitance (µF)	Capacitance tolerance	Characteristic	Rated voltage (V_{dc})	Configuration	Electrode material	Maximum H dimension (inch (mm))
M3281801E2B825M - - -	8.2	M	E2	100	2/	P, B	.295 (7.49)
M3281801E2B106M - - -	10	M	E2	100	2/	P, B	.295 (7.49)
M3281801E2B146M - - -	14	M	E2	100	2/	P, B	.414 (10.52)
M3281801E2A156M - - -	15	M	E2	50	2/	P, B	.295 (7.49)
M3281801E2A186M - - -	18	M	E2	50	2/	P, B	.295 (7.49)
M3281801E2A206M - - -	20	M	E2	50	2/	P, B	.295 (7.49)
M3281801E2A226M - - -	22	M	E2	50	2/	P, B	.295 (7.49)
M3281801E2A306M - - -	30	M	E2	50	2/	P, B	.414 (10.52)
M3281801E2Z276M - - -	27	M	E2	25	2/	P, B	.295 (7.49)
M3281801E2Z336M - - -	33	M	E2	25	2/	P, B	.295 (7.49)
M3281801E2Z476M - - -	47	M	E2	25	2/	P, B	.295 (7.49)
M3281801E2A666M - - -	66	M	E2	50	2/	P, B	.414 (10.52)

1/ The complete PIN shall include additional symbols to indicate configuration, product level, and electrode material.
2/ J, L, G, H, K, M, C, B, F, D, P, and R (see figure 1 and MIL-PRF-32818).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:48Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy - EC
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5910-2026-039)

Review activities:
Army - MI
Navy - AS, MC, OS, SH
Air Force - 19
Other – MDA, NA

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T07:48Z
Check the source to verify that this is the current version before use.