MILITARY SPECIFICATION SHEET

CONNECTOR, COMPONENT PARTS, ELECTRICAL BACKPLANE, PRINTED WIRING, HOUSING

This specification sheet is approved for use by the Naval Electronic Systems Command, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the housing described herein shall consist of this specification and the latest issue of specification MIL-C-28859(EC).


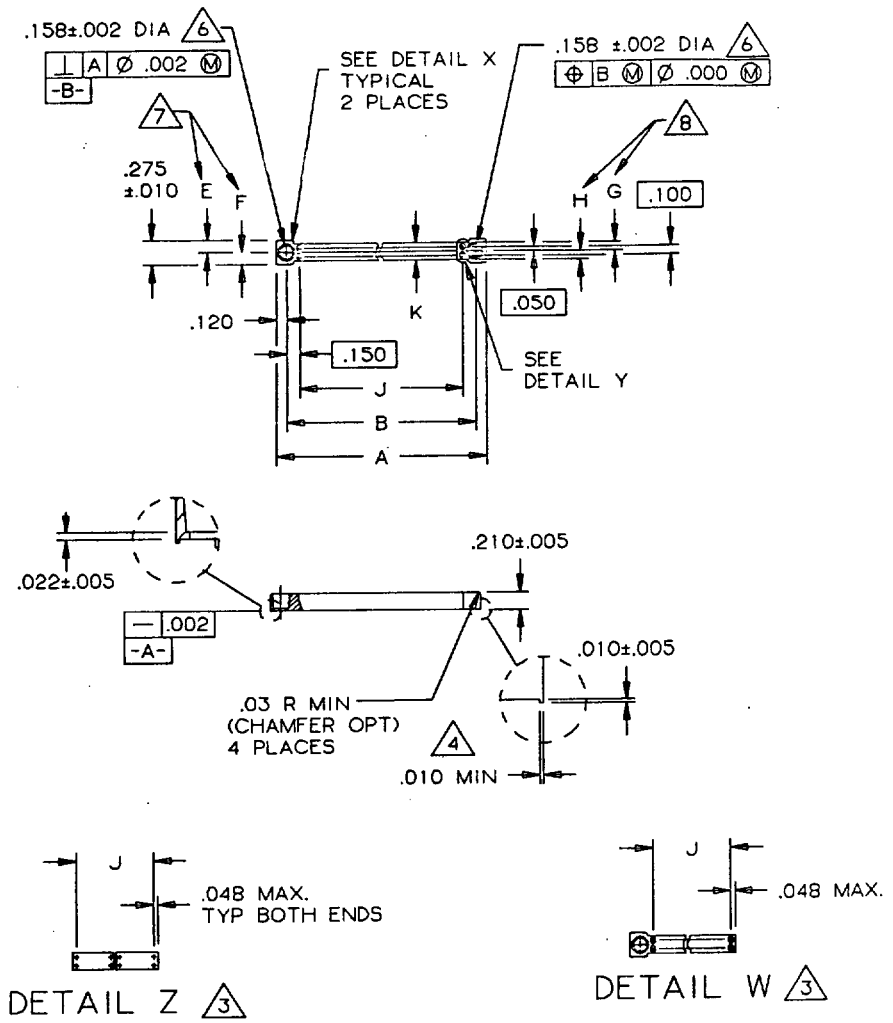



FIGURE 1. Double row housing.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:56Z
Check the source to verify that this is the current version before use.

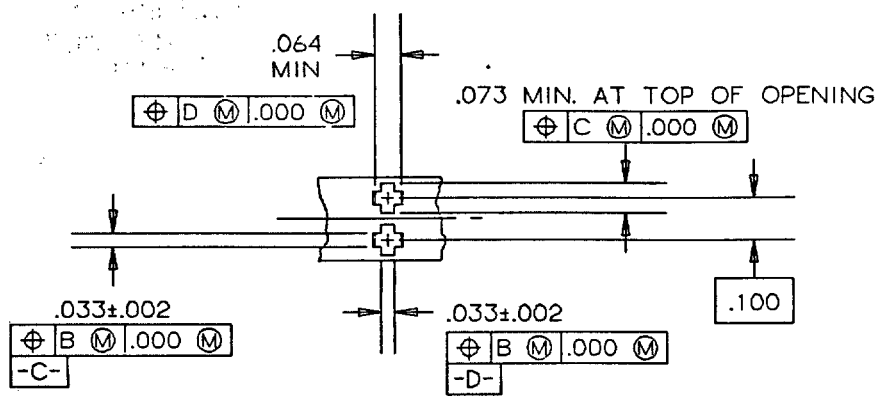

DETAIL Y

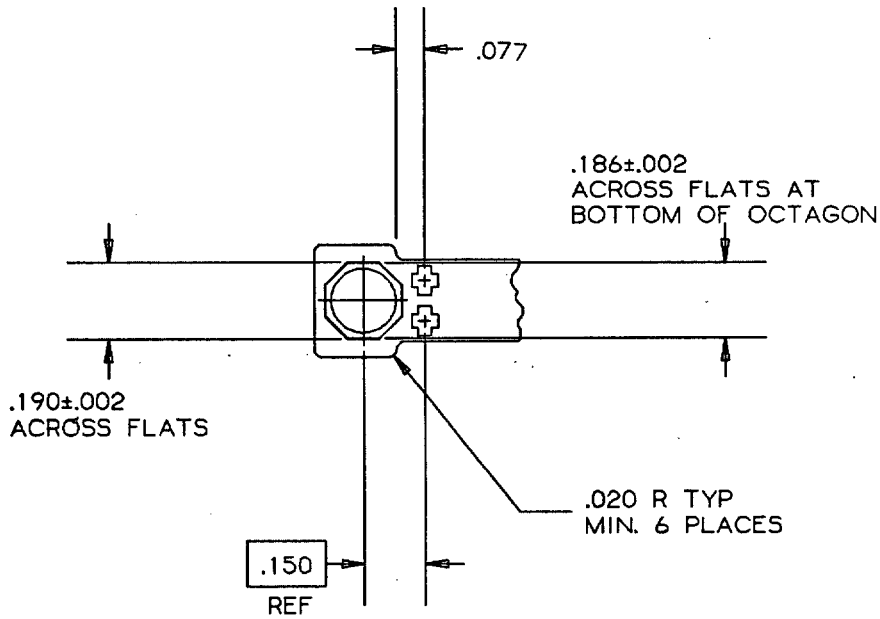

DETAIL X

INCHES	MM
.001	.03
.002	.05
.003	.08
.004	.10
.005	.13
.006	.15
.010	.25
.020	.51
.022	.56
.030	.76
.033	.84
.048	1.22
.050	1.27
.064	1.63
.073	1.85
.100	2.54
.120	3.05
.150	3.81
.158	4.01
.186	4.72
.190	4.83
.200	5.08
.210	5.33
.215	5.46
.270	6.86
.275	6.99

FIGURE 1. Double row housing (continued).

NOTES

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Optional: Part may be molded as separate modular pieces. See TABLE 1.
4. Quantity and configuration optional. May be bar or circular pad.
5. Tolerances based on plated-through holes ⊕ Ø .008 Ⓢ in printed circuit board.
6. The coaxiality of the octagon feature and the .158 dia hole shall be within .001 regardless of the size of either feature.
7. E = F within ±.0025.
8. G = H within ±.0025.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:56Z
Check the source to verify that this is the current version before use.



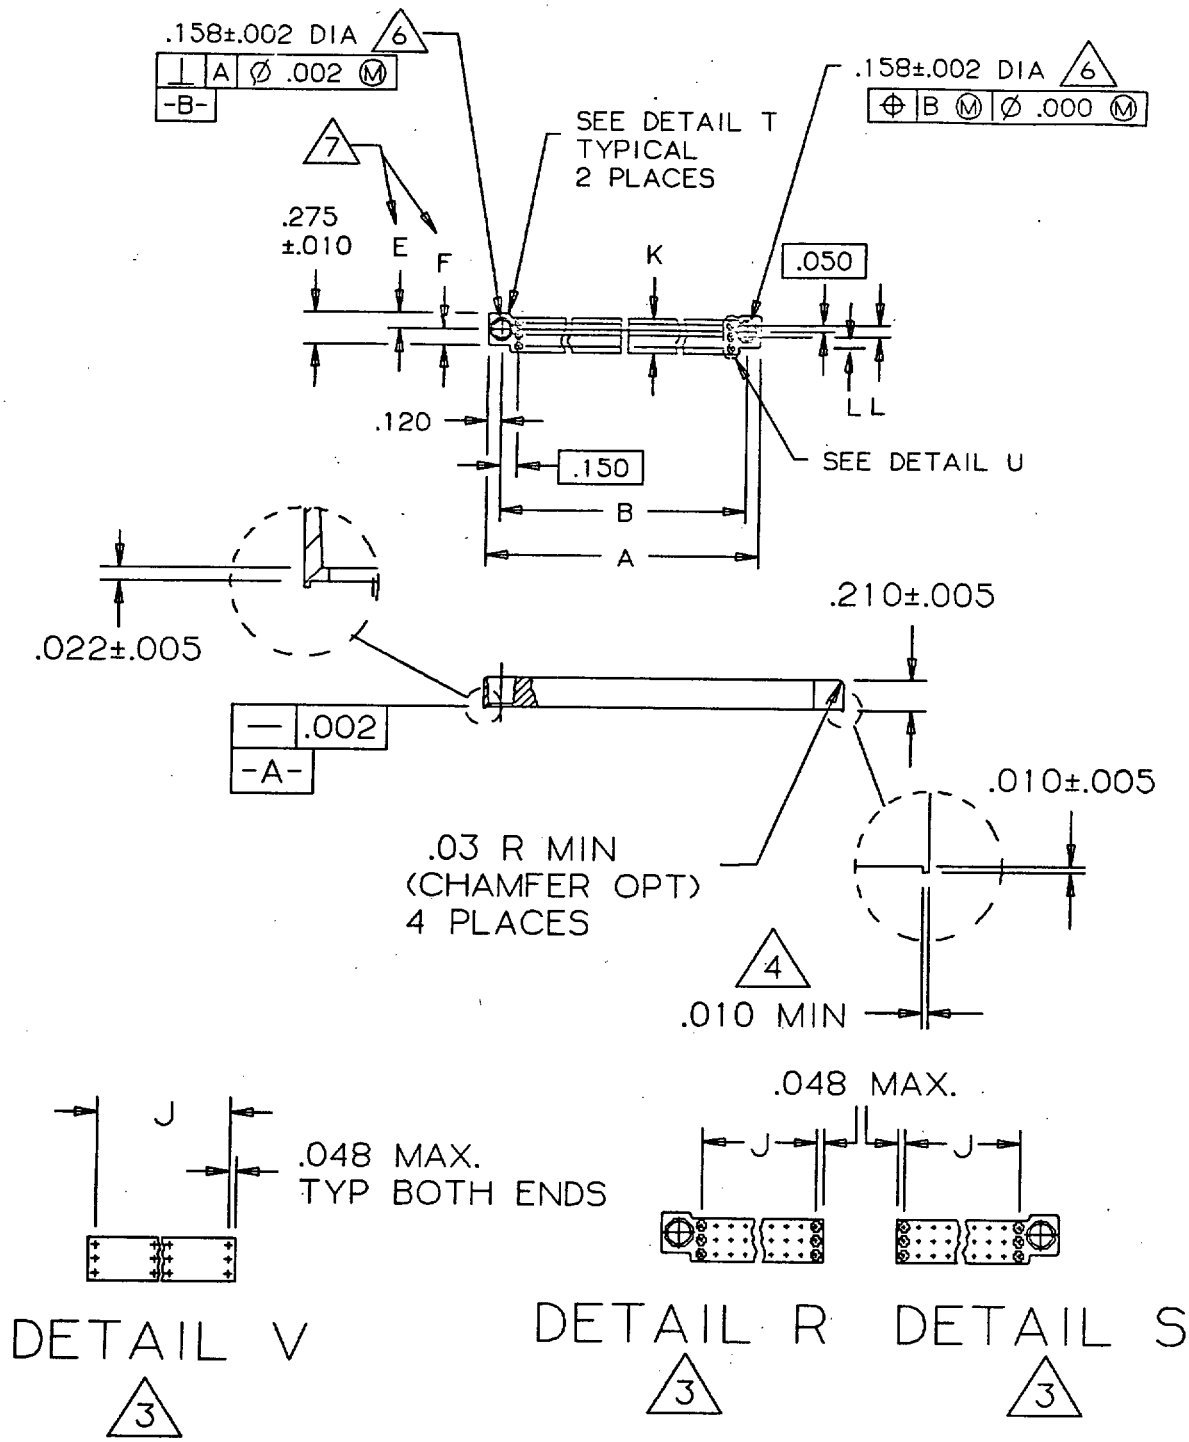


FIGURE 2. Multiple row housing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:56Z
Check the source to verify that this is the current version before use.

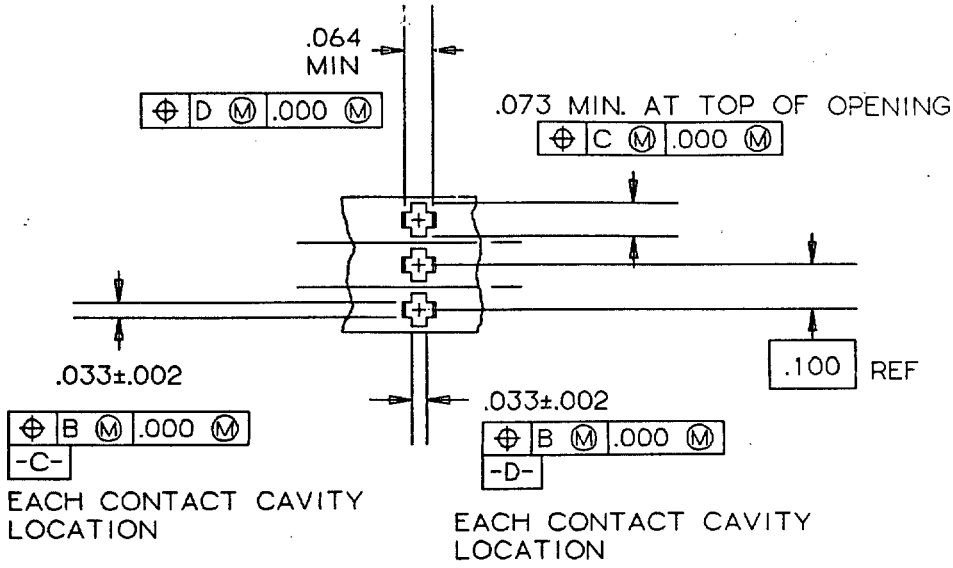

DETAIL U

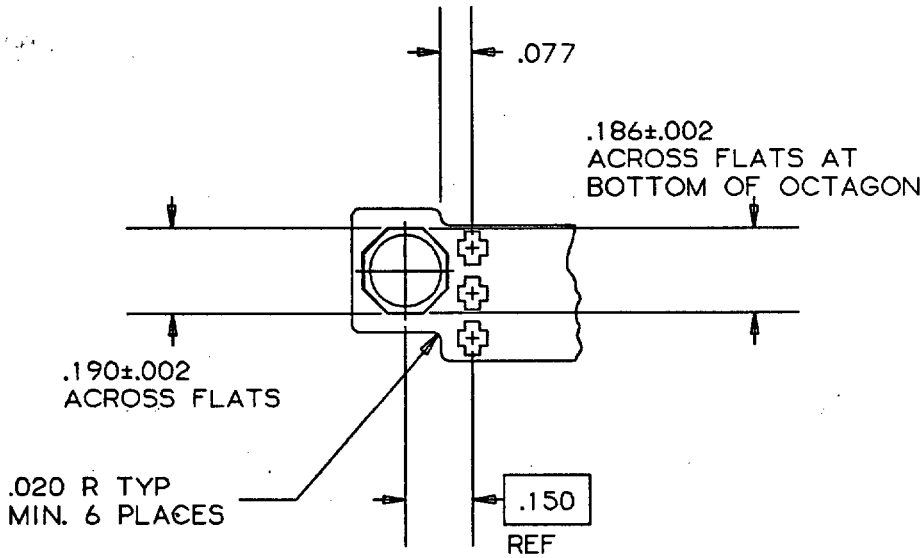

DETAIL T

INCHES	MM
.001	.03
.002	.05
.003	.08
.004	.10
.005	.13
.006	.15
.010	.25
.020	.51
.022	.56
.030	.76
.033	.84
.048	1.22
.050	1.27
.064	1.63
.073	1.85
.100	2.54
.120	3.05
.150	3.81
.158	4.01
.186	4.72
.190	4.83
.200	5.08
.210	5.33
.215	5.46
.270	6.86
.275	6.99

FIGURE 2. Multiple row housing (continued).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:56Z
Check the source to verify that this is the current version before use.

NOTES

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Optional: Part may be molded as separate modular pieces. See TABLE 1.
4. Quantity and configuration optional. May be bar or circular pad.
5. Tolerances based on plated-through holes ⌖ Ⓢ .008 Ⓢ in printed circuit board.
6. The coaxiality of the octagon feature and the .158 dia hole shall be within .001 regardless of the size of either feature.
7. E = F within ±.0025.
8. G = H within ±.0025.

REQUIREMENTS

Dimensions are configurations: See FIGURE 1 and FIGURE 2.
Material: Polyester Theromoplastic, MIL-M-24519, Type GPT-30F, Color Black.
Housing retention force: 6 ounces minimum and 30 ounces maximum per compliant pin. Retention only on outside rows of compliant pins.
Packaging: The modular parts comprising a dash number shall be bagged and marked.
This housing is designed for use with MIL-C-28859/1(EC).
Military part number: M28859/2-(dash number from TABLE I).

TABLE I. Dash numbers and dimensions.

DASH NO	MODULAR PARTS	A ±.005	B BSC	J EQUAL SPACES AT .100 BSC	K ±.005	L EQUAL SPACES AT .100 BSC	NO. OF CONTACT LOCATIONS (EACH PIECE)
-1	1	2.440	2.200	19	.200(.215 MAX AFTER ASSY)		40 (2 ROWS OF 20)
	2 EA DETAIL W 1/	2.440	2.200	9			20 (2 ROWS OF 10)
-4	2 EA DETAIL W	5.440	5.200	24	.200(.215 MAX AFTER ASSY)		50 (2 ROWS OF 25)
	2 EA DETAIL W } 1/	5.440	5.200	19			40 (2 ROWS OF 20)
	1 EA DETAIL Z } 1/	5.440	5.200	9			20 (2 ROWS OF 10)
-5	1 EA DETAIL R&S	5.440	5.200	24	.300(.315 MAX AFTER ASSY)	2	75 (3 ROWS OF 25)
	1 EA DETAIL R&S } 1/	5.440	5.200	19		2	60 (3 ROWS OF 20)
	1 EA DETAIL V } 1/			9		2	30 (3 ROWS OF 10)
-6	1 EA DETAIL R&S	5.440	5.200	24	.400(.415 MAX AFTER ASSY)	3	100 (4 ROWS OF 25)
	1 EA DETAIL R&S } 1/	5.440	5.200	19		3	80 (4 ROWS OF 20)
	1 EA DETAIL V } 1/			9		3	40 (4 ROWS OF 10)
	2 EA DETAIL W } 1/			24			50 (2 ROWS OF 25)
	2 EA DETAIL Z } 1/						50 (2 ROWS OF 25)
-7	1 EA DETAIL R&S	5.440	5.200	24	.500(.515 MAX AFTER ASSY)	4	125 (5 ROWS OF 25)
	1 EA DETAIL R&S } 1/	5.440	5.200	19		4	100 (5 ROWS OF 20)
	1 EA DETAIL V } 1/			9		4	50 (5 ROWS OF 10)
	1 EA DETAIL W } 1/			24			50 (2 ROWS OF 25)
	2 EA DETAIL V } 1/			24		2	75 (3 ROWS OF 25)

1/ Alternate construction.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
NAVY-EC

(Project No. 5935-N259)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:56Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-28859/24 (EC)	CONNECTOR, COMPONENT PARTS, Electrical Backplane

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:56Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY
Naval Electronic Systems Command
Washington, DC 20363

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20363
ATTN: ELEX 8111

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:56Z
Check the source to verify that this is the current version before use.