INCH-POUND

MIL-C-28859/2D(NW)
23 March 1994
SUPERSEDING
MIL-C-28859/2C(EC)
4 December 1984

MILITARY SPECIFICATION SHEET

CONNECTOR, COMPONENT PARTS, ELECTRICAL BACKPLANE, PRINTED WIRING, HOUSING

This specification sheet is approved for use by the Crane Division, Naval Surface Warfare Center, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specifications listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-28859.

AMSC N/A FSC 5935
DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:56Z
Check the source to verify that this is the current version before use.



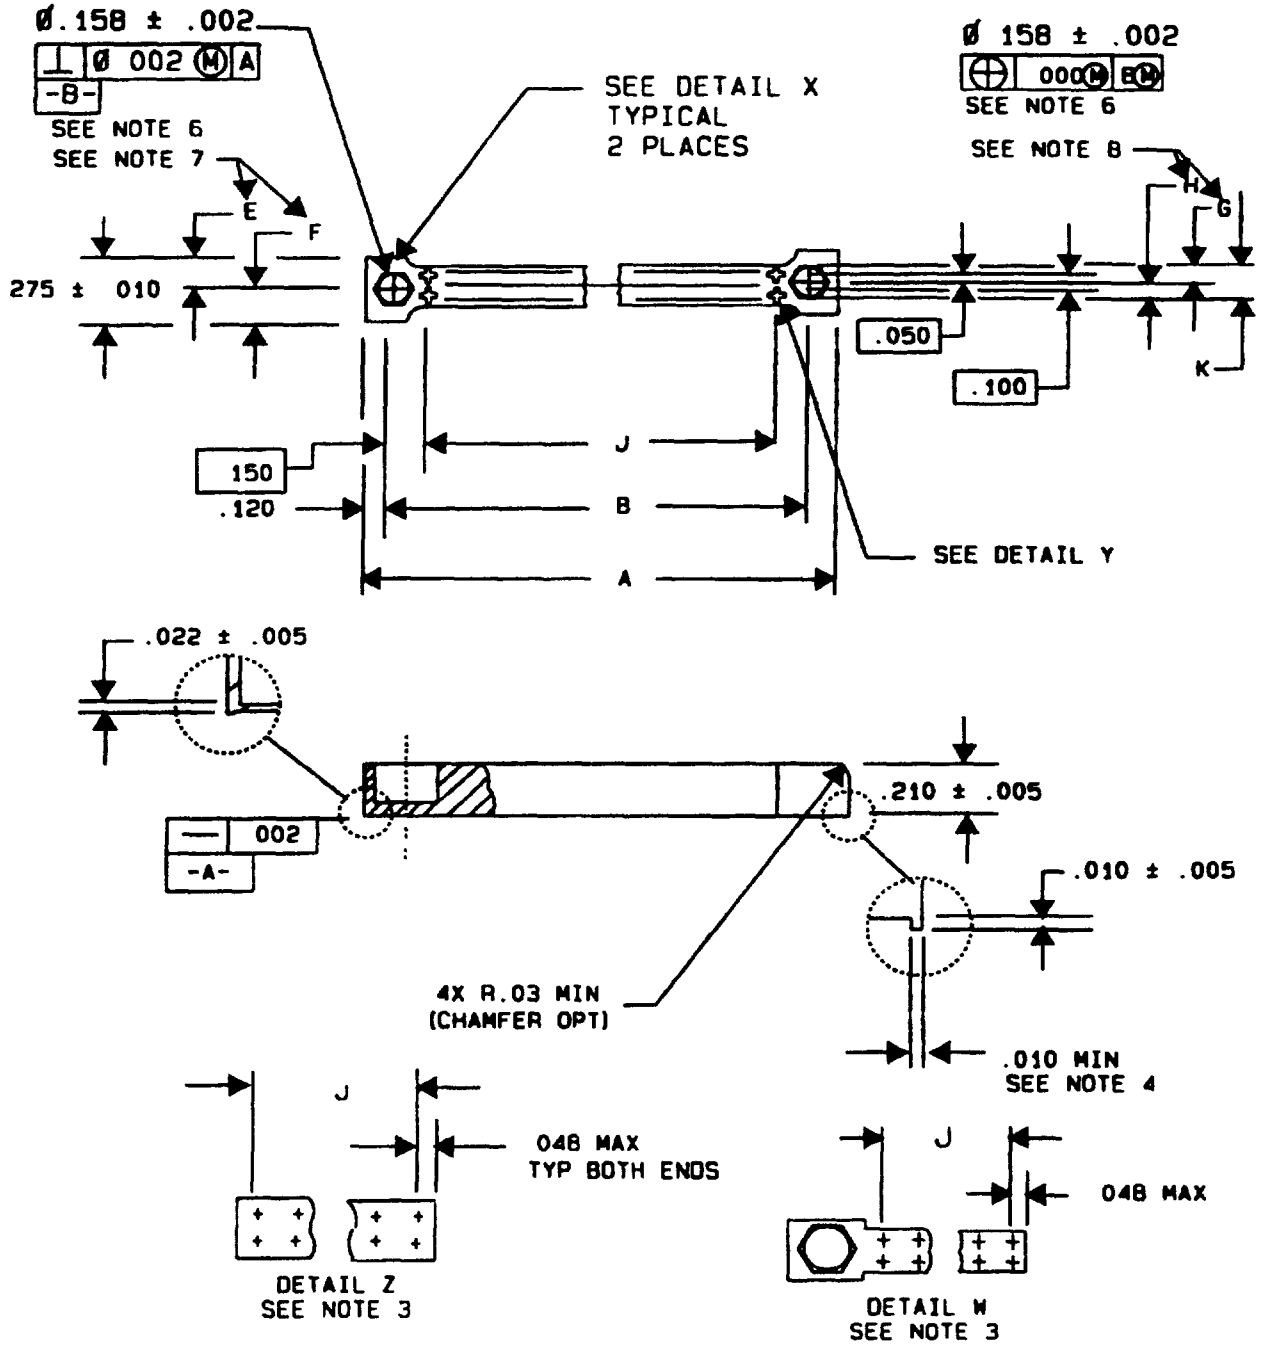


FIGURE 1. Double row housing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:56Z
Check the source to verify that this is the current version before use.

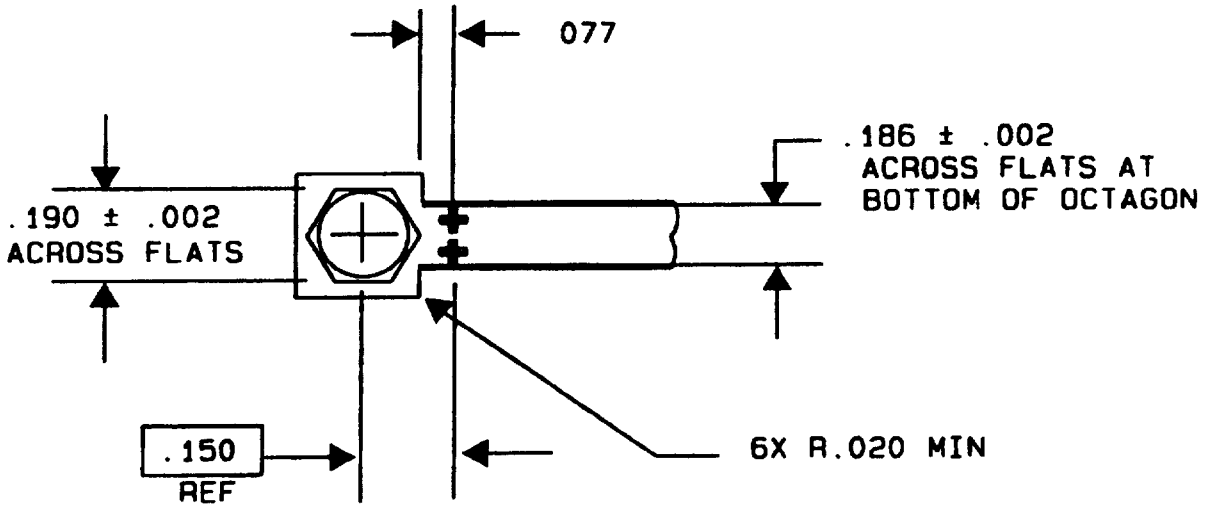

DETAIL X

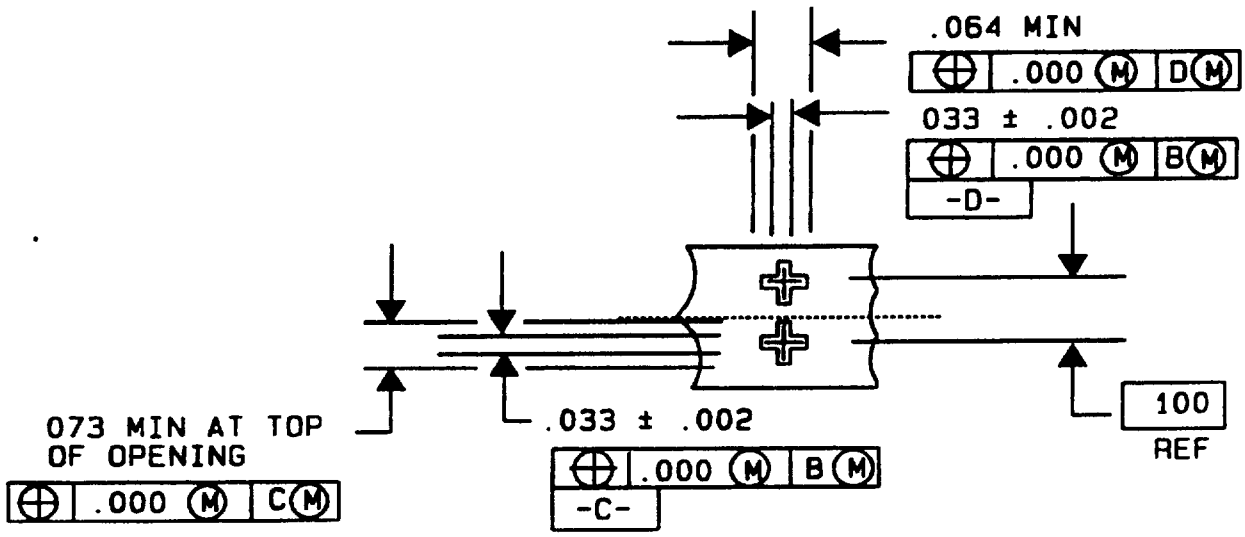

DETAIL Y


FIGURE 1. Double row housing - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:56Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.030	.76	.158	4.01
.002	.05	.033	.84	.186	4.72
.003	.08	.048	1.22	.190	4.83
.004	.10	.050	1.27	.200	5.08
.005	.13	.064	1.63	.210	5.33
.006	.15	.073	1.85	.215	5.46
.010	.25	.100	2.54	.270	6.86
.020	.51	.120	3.05	.275	6.99
.022	.56	.150	3.81		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Optional: Part may be molded as separate modular pieces. See table I.
4. Quantity and configuration optional. May be bar or circular pad.
5. Tolerances based on plated-through holes



in printed circuit board.

6. The coaxiality of the octagon feature and the .158 dia hole shall be within .001 regardless of the size of either feature.
7. E = F within plus or minus .0025.
8. G = H within plus or minus .0025.

FIGURE 1. Double row housing - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:56Z
Check the source to verify that this is the current version before use.

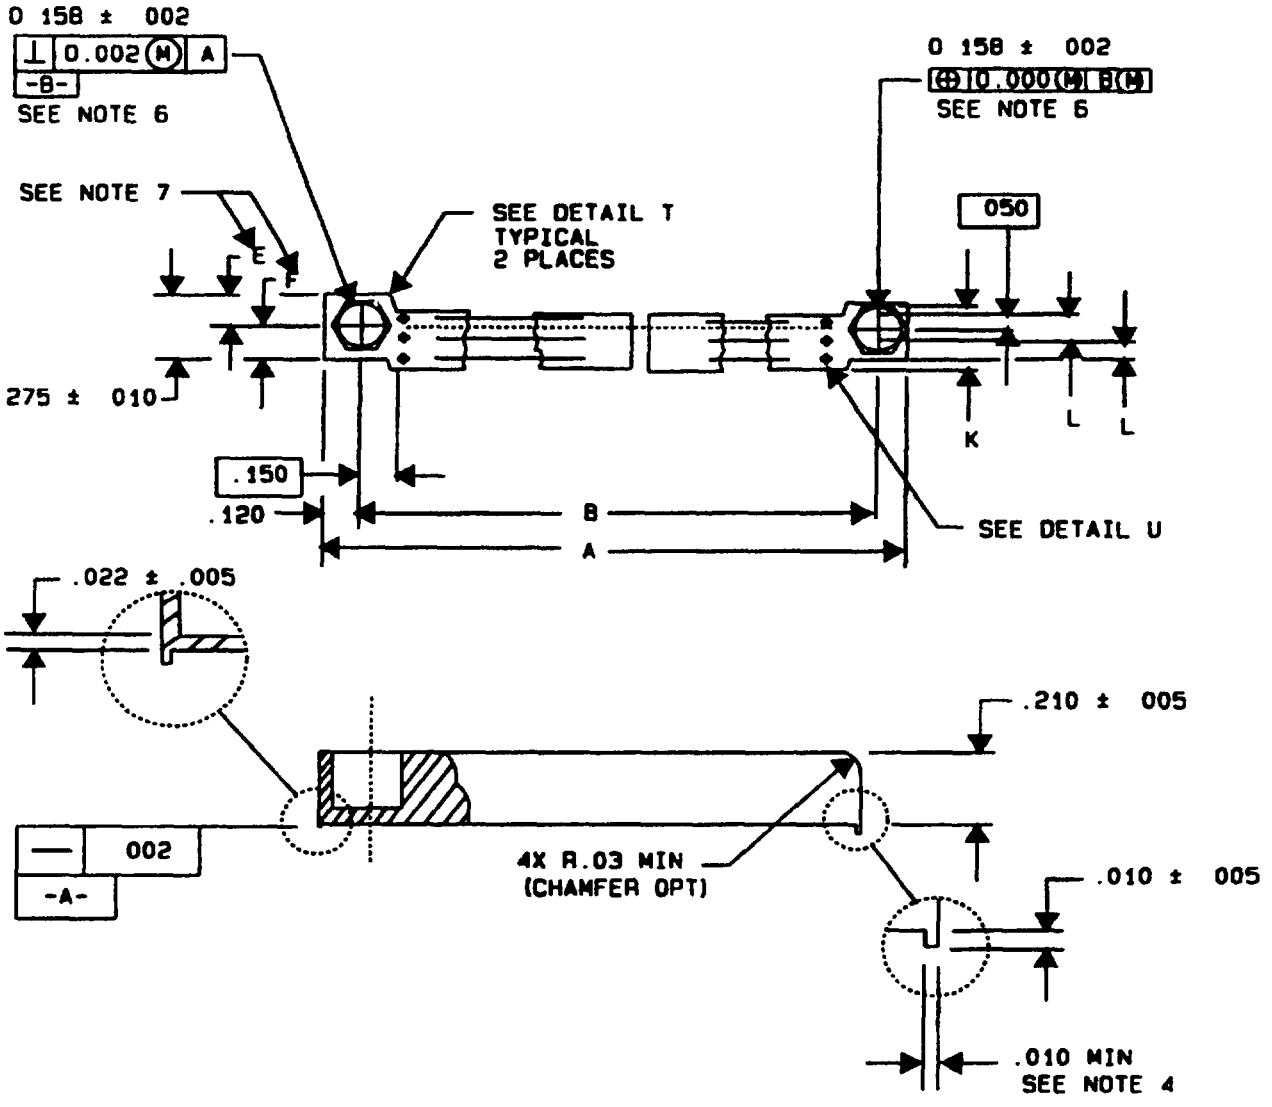


FIGURE 2. Multiple row housing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:56Z
Check the source to verify that this is the current version before use.



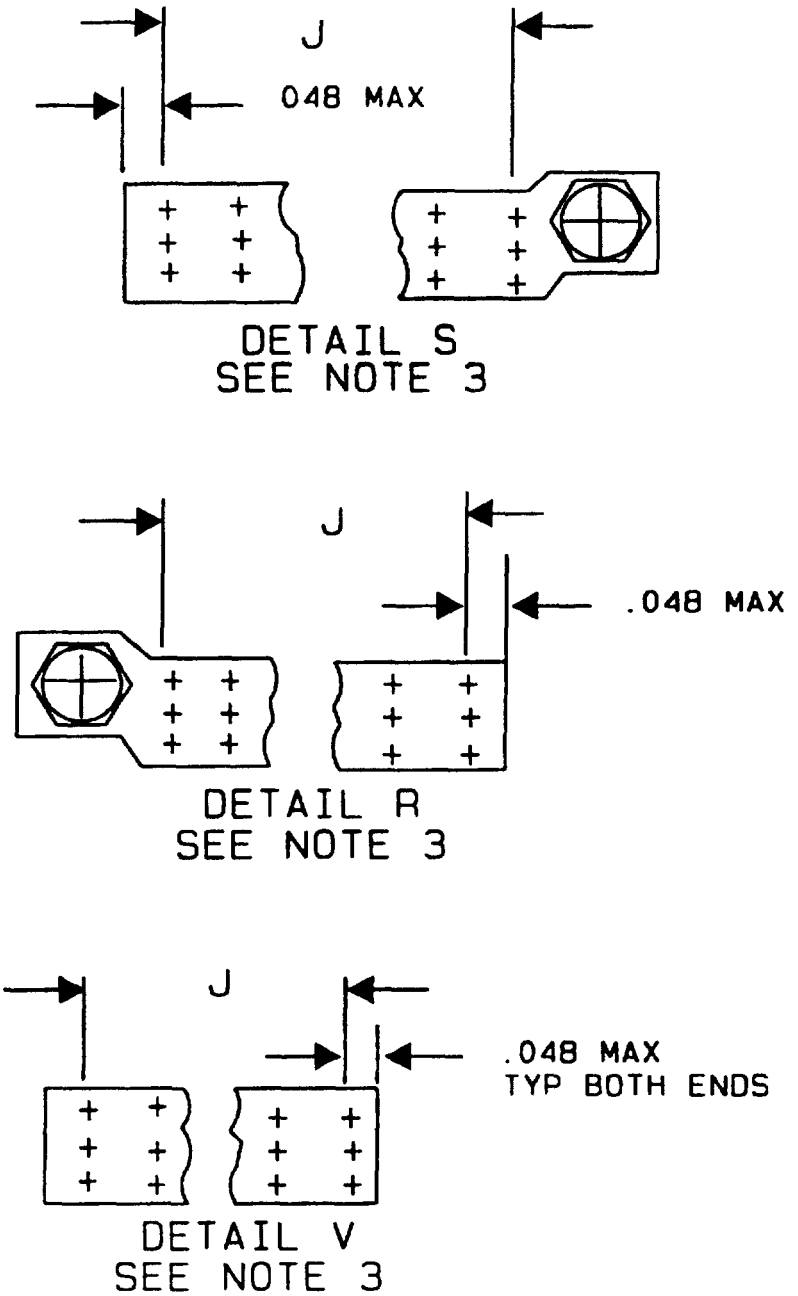


FIGURE 2. Multiple row housing - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:56Z
Check the source to verify that this is the current version before use.

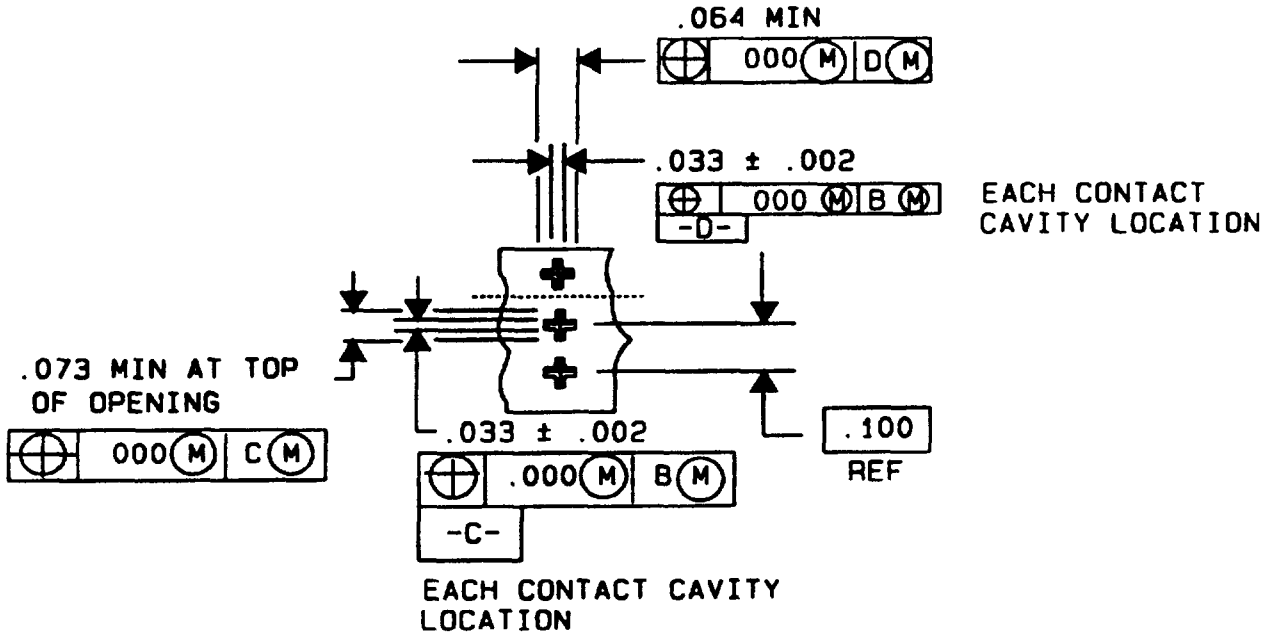

DETAIL U

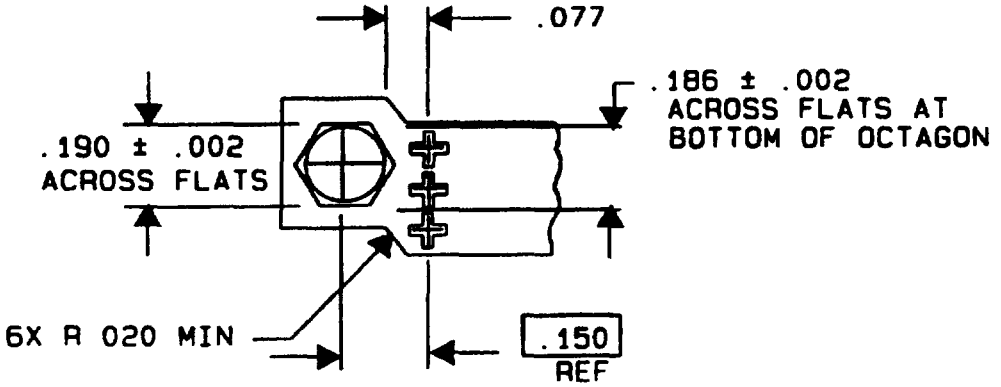

DETAIL T


FIGURE 2. Multiple row housing - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:56Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.030	.76	.158	4.01
.002	.05	.033	.84	.186	4.72
.003	.08	.048	1.22	.190	4.83
.004	.10	.050	1.27	.200	5.08
.005	.13	.064	1.63	.210	5.33
.006	.15	.073	1.85	.215	5.46
.010	.25	.100	2.54	.270	6.86
.020	.51	.120	3.05	.275	6.99
.022	.56	.150	3.81		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Optional: Part may be molded as separate modular pieces. See table I.
4. Quantity and configuration optional. May be bar or circular pad.
5. Tolerances based on plated-through holes



in printed circuit board.

6. The coaxiality of the octagon feature and the .158 dia hole shall be within .001 regardless of the size of either feature.
7. E = F within plus or minus .0025.
8. G = H within plus or minus .0025.

FIGURE 2. Multiple row housing - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:56Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1 and figure 2.

Material: Polyester thermoplastic, MIL-M-24519, type GPT-30F, color black.

Housing retention force: 6 ounces minimum and 30 ounces maximum per compliant contact. Retention only on outside rows of individual housings.

Packaging: The modular parts comprising a dash number shall be bagged and marked. This housing is designed for use with MIL-C-28859/1 and MIL-C-28859/5.

Military part number: M28859/2- (dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:56Z
Check the source to verify that this is the current version before use.

TABLE I Dash numbers and dimensions.

Dash no	Modular parts	A ±.005	B BSC	J Equal spaces at .100 BSC	K ± 005	L Equal spaces at .100 BSC	No of contact locations (each piece)	Total no of contacts
-1	1	2.440	2.200	19	.200 (.215 max after assy)		40 (2 rows of 20)	40
	2 ea Detail W 1/	2.440	2.200	9			20 (2 rows of 10)	40
-4	2 ea Detail W	5.440	5.200	24	.200 (.215 max after assy)		50 (2 rows of 25)	100
	2 ea Detail W 1/ 1 ea Detail Z 1/	5.440 5.440	5.200 5.200	19 9			40 (2 rows of 20) 20 (2 rows of 10)	100
-5	1 ea Detail R&S	5.440	5.200	24	.300 (.315 max after assy)	2	75 (3 rows of 25)	150
	1 ea Detail R&S 1/ 1 ea Detail V 1/	5.440	5.200	19 9		2 2	60 (3 rows of 20) 30 (3 rows of 10)	150
-6	1 ea Detail R&S	5.440	5.200	24	.400 (.415 max after assy)	3	100 (4 rows of 25)	200
	1 ea Detail R&S 1/ 1 ea Detail V 1/	5.440	5.200	19 9		3 3	80 (4 rows of 20) 40 (4 rows of 10)	200
	2 ea Detail W 1/ 2 ea Detail Z 1/			24			50 (2 rows of 25) 50 (2 rows of 25)	200
	2 ea Detail W 1/ 1 ea Detail Z 1/ 2 ea Detail Z 1/ 1 ea Detail Z 1/	5.440	5.200	19 9 19 9		- - - -	40 (2 rows of 20) 20 (2 rows of 10) 40 (2 rows of 20) 20 (2 rows of 10)	200
-7	1 ea Detail R&S	5.440	5.200	24	.500 (.515 max after assy)	4	125 (5 rows of 25)	250
	1 ea Detail R&S 1/ 1 ea Detail V 1/	5.440	5.200	19 9		4 4	100 (5 rows of 20) 50 (5 rows of 10)	250
	2 ea Detail W 1/ 2 ea Detail V 1/			24 24		- 2	50 (2 rows of 25) 75 (3 rows of 25)	250
	2 ea Detail W 1/ 1 ea Detail Z 1/ 2 ea Detail V 1/	5.440	5.200	19 9 24		- - 2	40 (2 rows of 20) 20 (2 rows of 10) 75 (3 rows of 25)	250

1/ Alternate construction.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:56Z
Check the source to verify that this is the current version before use.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodian:
Navy - NW

User activity:
Navy - AS

Preparing activity:
Navy - NW

(Project 5935-N397-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:56Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-C-28859/2D(NW)	1994 March 23

3. DOCUMENT TITLE
Connector, Component Parts, Electrical Backplane, Printed Wiring, Housing

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)
Technical Point of Contact (TPOC): Mr. Joseph P. Toy (Code 603A) PLEASE ADDRESS ALL CORRESPONDENCE AS FOLLOWS:	(1) Commercial: TPOC: 812-854-5993 (2) AUTOVON: 88-482-5993
c. ADDRESS (Include Zip Code) Commander ATTN: Joseph P. Toy, Code 603A, Bldg. 2917 NAVSURFWARCENDIV, 300 Highway 361 Crane, IN 47522-5001	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:36Z
Check the source to verify that this is the current version before use.