INCH-POUND

MIL-C-28859/3D(NW)
23 March 1994
SUPERSEDING
MIL-C-28859/3C(EC)
29 August 1984

MILITARY SPECIFICATION SHEET

CONNECTOR, COMPONENT PARTS, ELECTRICAL BACKPLANE, PRINTED WIRING, COMPLIANT CONTACT, FEED-THROUGH

This specification sheet is approved for use by the Crane Division, Naval Surface Warfare Center, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-28859.

AMSC N/A
FSC 5935
DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:56Z
Check the source to verify that this is the current version before use.

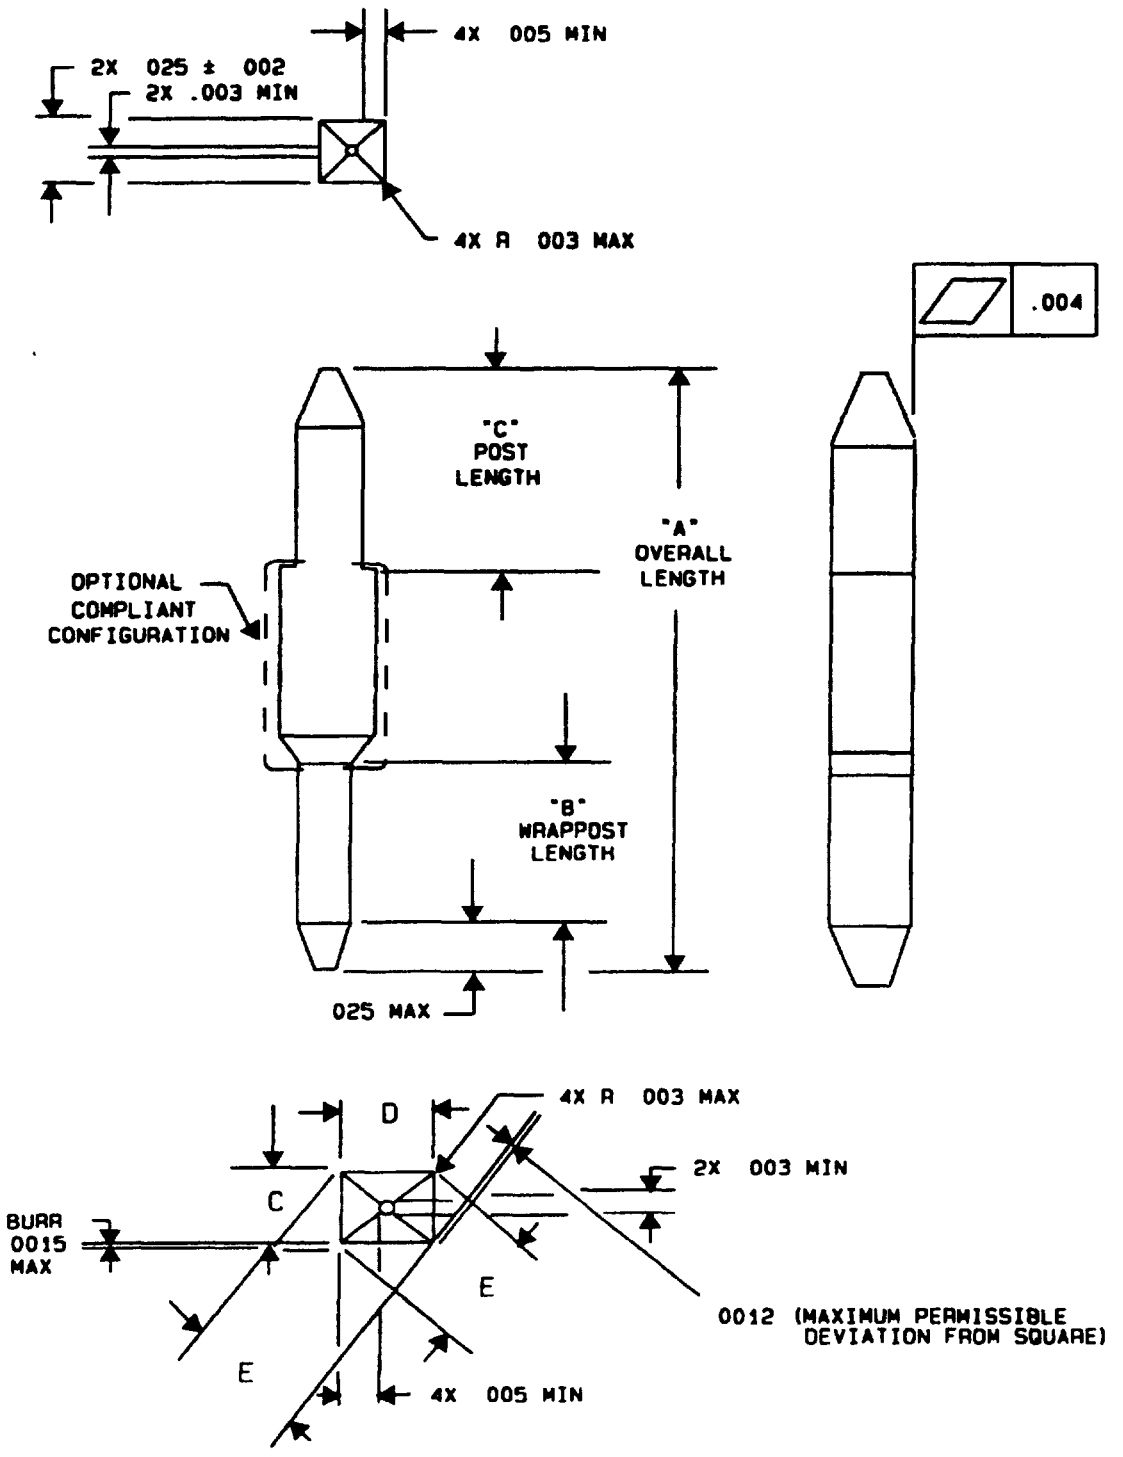


FIGURE 1. Compliant contact, feed-through.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:56Z
Check the source to verify that this is the current version before use.

Wrappost Geometry				
C	D	E	Parallelism	Straightness
.025 (Nom)	.025 (Nom)	.0355 Max	.002	.005 in/in
.022 (Min)	.022 (Min)	.0325 Min		

NOTES:

1. Part to be free of burrs and sharp edges except as noted.
2. Dimensions apply after plating.
3. Unless otherwise specified, tolerances are plus or minus .01 inch (.3 mm) on two place decimals; plus or minus .005 inch (.13 mm) on three place decimals; and plus or minus .0001 inch (.003 mm) on four place decimals.
4. Recommended printed wiring board thickness .112 + .200/ -.000 inch.

FIGURE 1. Compliant contact, feed-through - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:56Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Material: Copper in accordance with ASTM B122, alloy UNS No. C72500, temper H08, or phosphor bronze in accordance with ASTM B159, alloy UNS No. C51000, temper H03 minimum, or beryllium copper in accordance with ASTM B194, alloy UNS No. C17200, minimum hardness of 310HK.

Finish: Gold plate, MIL-G-45204, type II, grade C, class 1, 50 microinches minimum over nickel plating, QQ-N-290, class 1, 50 microinches minimum.

Dimensions and configuration: See figure 1.

Military part number: M28859/3- (dash number from table I).

TABLE I. Dash numbers and dimensions.

Dash No	Overall length A ± .010	Wrappost length B (min) 1/	Post length C (± .010)
01	.493	0	.318
02	.668	.175	.318
03	.743	.250	.318
04	.843	.350	.318
05	.993	.500	.318
06	1.118	.625	.318
07	1.243	.750	.318
08	.540	0	.365
09	.715	.175	.365
10	.790	.250	.365
11	.890	.350	.365
12	1.040	.500	.365
13	1.165	.625	.365
14	1.290	.750	.365

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:56Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and dimensions - Continued.

Dash No	Overall length A ± .010	Wrappost length B (min) 1/	Post length C (± .010)
15	.405	0	.230
16	.580	.175	.230
17	.655	.250	.230
18	.755	.350	.230
19	.905	.500	.230
20	1.030	.625	.230
21	1.155	.750	.230

1/ Backplane thickness greater than .125 inch will reduce the length of B available for wrapping

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodian:
Navy - NW

User activity:
Navy - AS

Preparing activity:
Navy - NW

(Project 5935-N397-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:56Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8 In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7
3. The preparing activity must provide a reply within 30 days from receipt of the form

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1 DOCUMENT NUMBER	2 DOCUMENT DATE (YYMMDD)
	MIL-C-28859/3D(NW)	1994 March 23

3. DOCUMENT TITLE: Connector, Component Parts, Electrical Backplane, Printed Wiring, Compliant Contact, Feed-Through

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME Technical Point of Contact (TPOC): Mr. Joseph P. Toy (Code 603A)	b. TELEPHONE (Include Area Code) (1) Commercial: TPOC: 812-854-5993 (2) AUTOVON: 88-482-5993
c. ADDRESS (Include Zip Code) Commander ATTN: Joseph P. Toy, Code 603A, Bldg. 2917 NAVSURFWARCENDIV, 300 Highway 361 Crane, IN 47522-5001	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

PLEASE ADDRESS ALL CORRESPONDENCE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:56Z
Check the source to verify that this is the current version before use.