A-A-55485/6
September 30, 1993
SUPERSEDING
MIL-M-38527/6D
January 27, 1992

COMMERCIAL ITEM DESCRIPTION

MOUNTING PADS, ELECTRICAL-ELECTRONIC COMPONENT, FOR RELAYS AND DISCRETE COMPONENTS

The General Services Administration has authorized the use of this commercial item description (CID) in preference to MIL-M-38527/6D.

Abstract. This CID covers mounting pads for use with relays and discrete components.

Part or Identifying Number (PIN). The PIN shall be A-55485/06- (plus a dash number from figure 1 and a material letter as shown below). Complete PIN example: A-55485/06-001D.

Salient characteristics.

Material. Material shall be diallyl phthalate (D), nylon (N), or polyterephthalate thermoplastic (C).

Configurations and dimensions. Configurations and dimensions shall be as specified on figure 1.

Regulatory requirements. This section is not applicable to this CID.

Quality assurance provisions. Quality assurance provisions shall be as specified in A-A-55485.

Packaging. Packaging shall be as specified in A-A-55485.

Suggested sources of supply. Suggested sources of supply are shown in table I.

Supersession data. Supersession data shall be as specified in table II.

Notes. The following information may be useful in acquiring the items described, but is not directive in nature.


Ordering data. Ordering data shall be as specified in A-A-55485.

Comments. Comments and requests for changes to this CID should be directed to Defense Electronics Supply Center, ATTN: DESC-EMM, 1507 Wilmington Pike, Dayton, OH 45444-5270, telephone (513) 296-5255, FAX (513) 296-8868.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FSC 5999

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

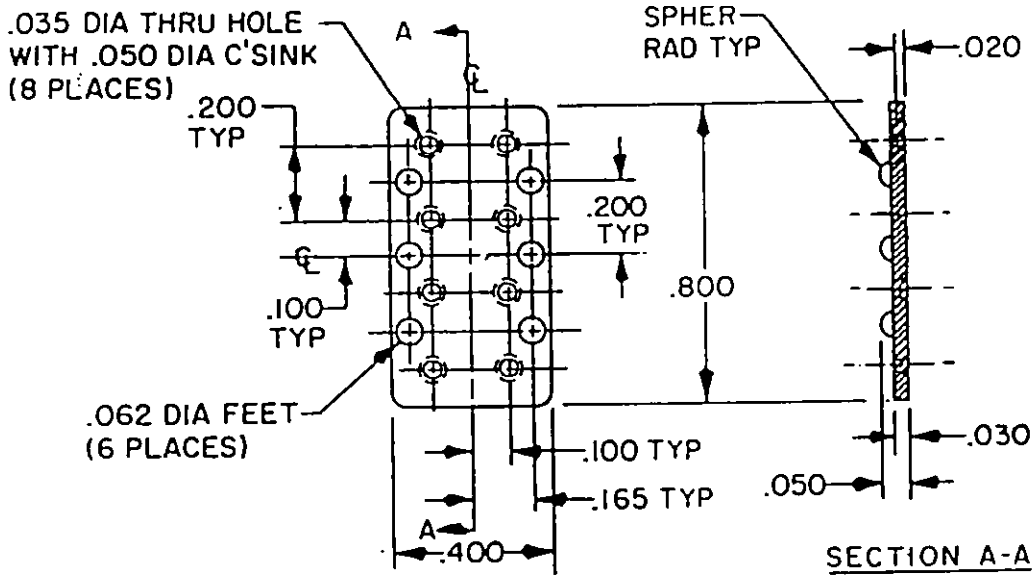



Inches	mm
.005	0.13
.020	0.51
.030	0.76
.035	0.89
.050	1.27
.062	1.57
.100	2.54
.165	4.19
.200	5.08
.400	10.16
.800	20.32

A-55485/06-001

Figure 1. Configurations and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

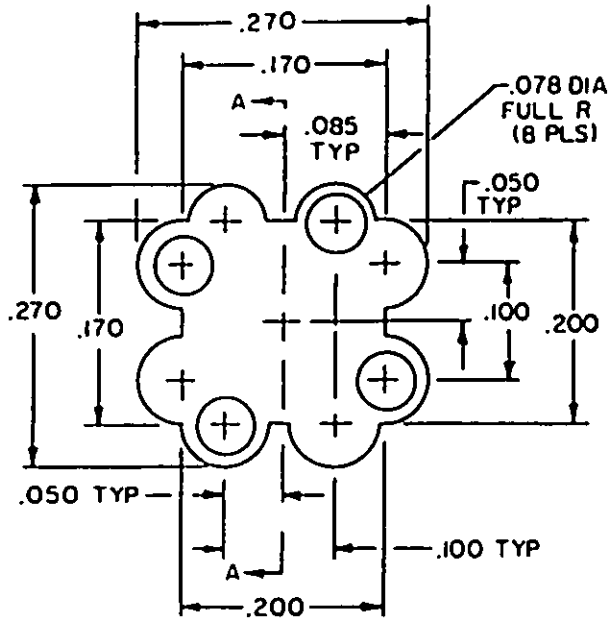

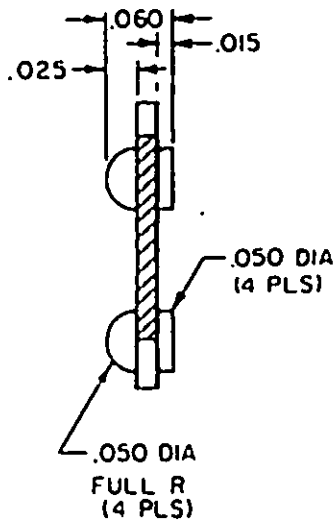


SECTION A—A

Inches	mm
.015	0.38
.025	0.64
.050	1.27
.060	1.52
.078	1.98
.085	2.16
.100	2.54
.170	4.32
.200	5.08
.270	6.86

A-55485/06-002

Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

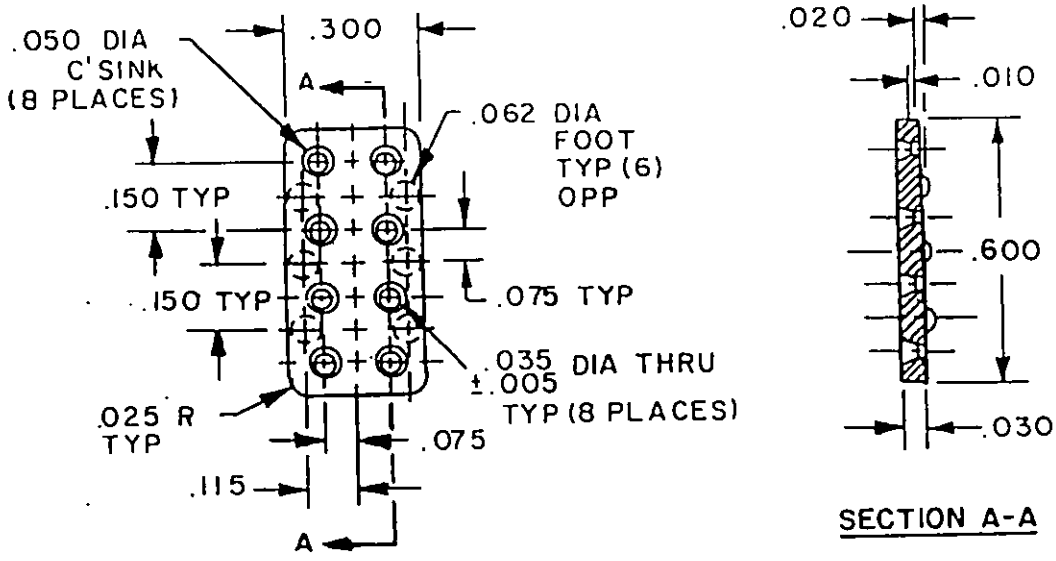


A-55485/06-003

Inches	mm
.005	0.13
.010	0.25
.020	0.51
.025	0.64
.030	0.76
.035	0.89
.050	1.27
.062	1.57
.075	1.90
.115	2.92
.150	3.81
.300	7.62
.600	15.24

Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

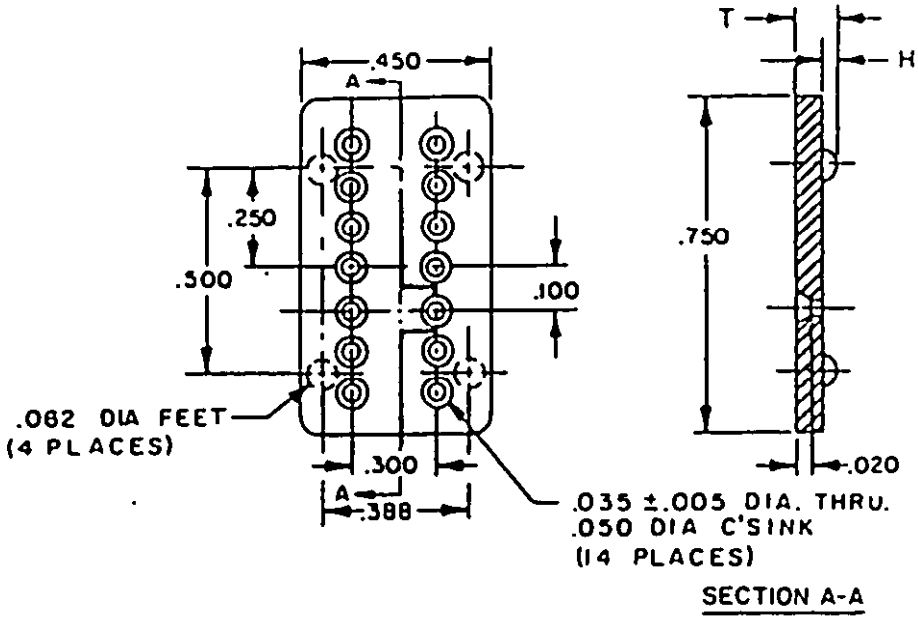


PIN A-55485/06-	H	T
004	---	.030 (0.76)
005	.020 Min (0.51)	.065 Max (1.65)
006	.050 (1.27)	.080 (2.03)

Inches	mm
.020	0.51
.025	0.64
.035	0.89
.040	1.27
.062	1.57
.100	2.54
.250	6.35
.300	7.62
.388	9.86
.450	11.43
.750	19.05

Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

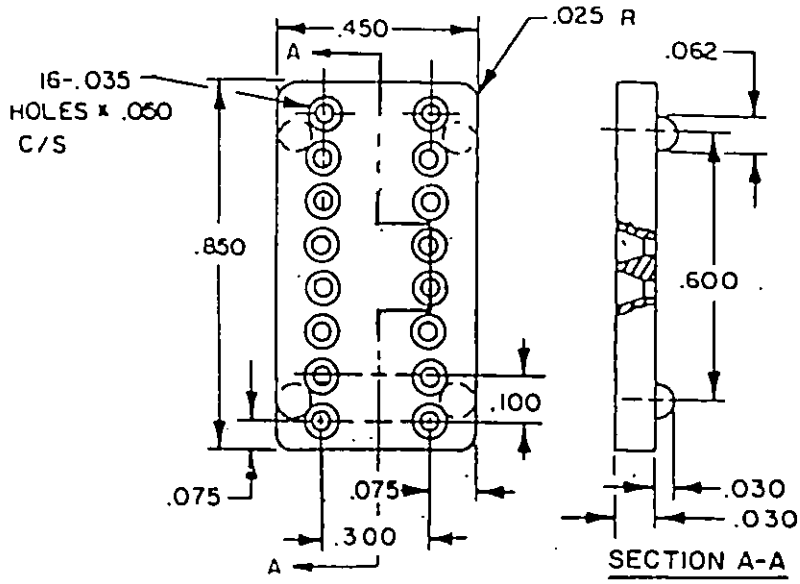


A-55485/06-007

Inches	mm
.025	0.64
.030	0.76
.035	0.89
.050	1.27
.062	1.57
.075	1.91
.100	2.54
.300	7.62
.450	11.43
.600	15.24
.850	21.59

Figure 1. Configurations and dimensions - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

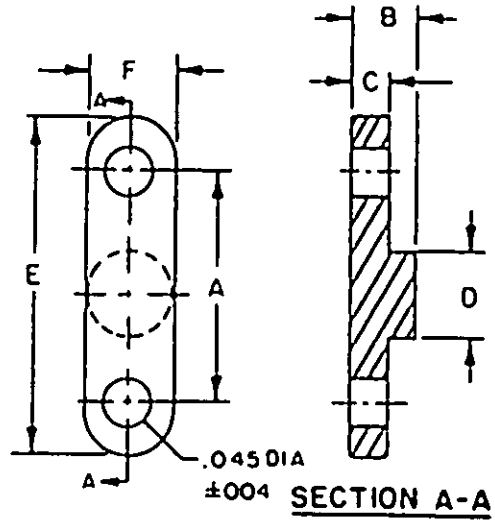

PIN A-55485/06-	A	B	C	D	E	F
008	.100 (2.54)	.045 (1.14)	.022 (.54)	.050/.070 (1.27)(1.78)	.180 (4.57)	.090 (2.29)
009	.150 (3.81)	.045 (1.14)	.022 (.54)	.090/.125 (2.29)(3.18)	.270 (6.86)	.125 (3.18)
010	.200 (5.08)	.045 (1.14)	.022 (.54)	.090 (2.29)	.290 (7.37)	.090 (2.89)
017	.250 (6.36)	.045 (1.14)	.026 (.82)	.090 (2.29)	.340 (8.89)	.090 (2.29)
018	.300 (7.62)	.045 (1.14)	.026 (.82)	.140 (3.81)	.390 (9.91)	.090 (2.29)
019	.350 (8.90)	.045 (1.14)	.030 (.76)	.140 (3.81)	.440 (11.18)	.090 (2.29)
020	.400 (10.16)	.045 (1.14)	.030 (.76)	.190 (4.82)	.490 (12.45)	.090 (2.29)
021	.500 (12.7)	.045 (1.14)	.030 (.76)	.190 (4.82)	.590 (14.99)	.090 (2.29)


Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

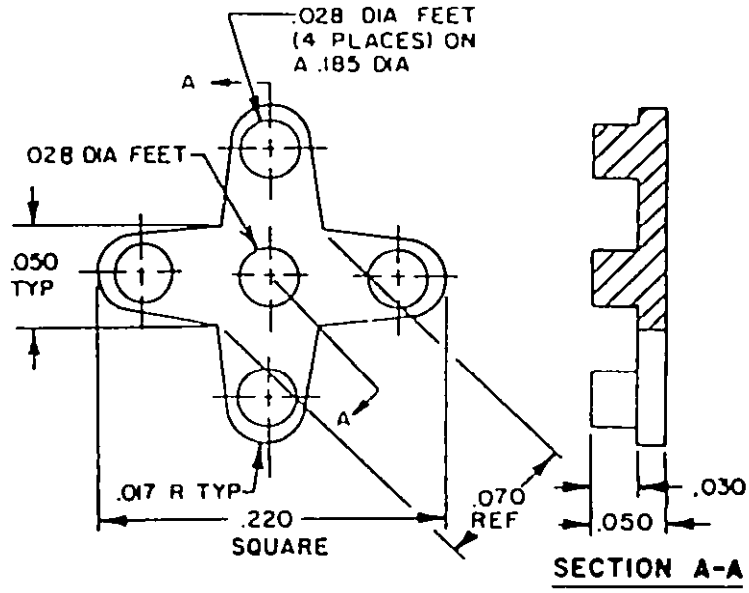

A-55485/06-011

Inches	mm
.017	0.43
.028	0.71
.030	0.76
.050	1.27
.070	1.78
.185	4.70
.220	5.59

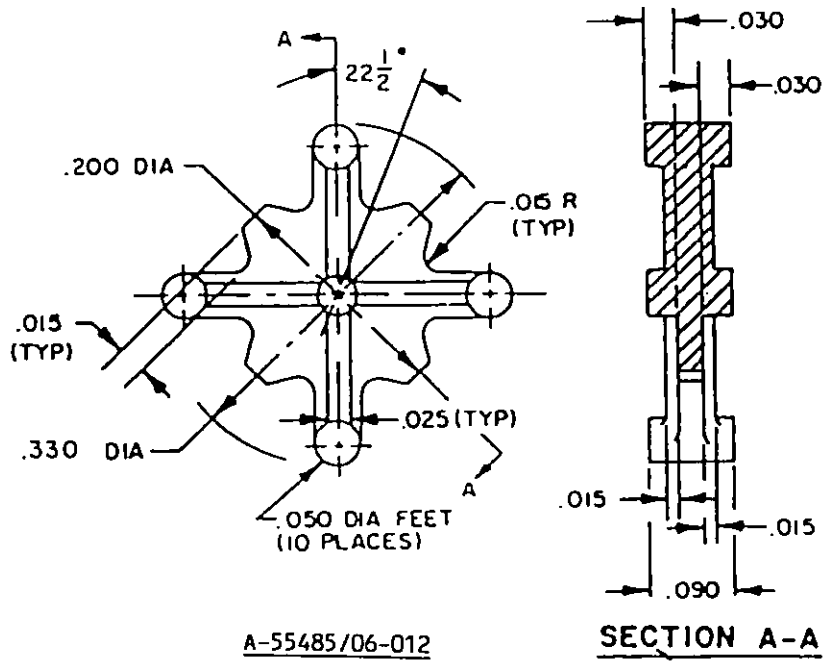


A-55485/06-012

Inches	mm
.015	0.38
.025	0.64
.030	0.76
.050	1.27
.090	2.29
.200	5.08
.330	8.38


Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

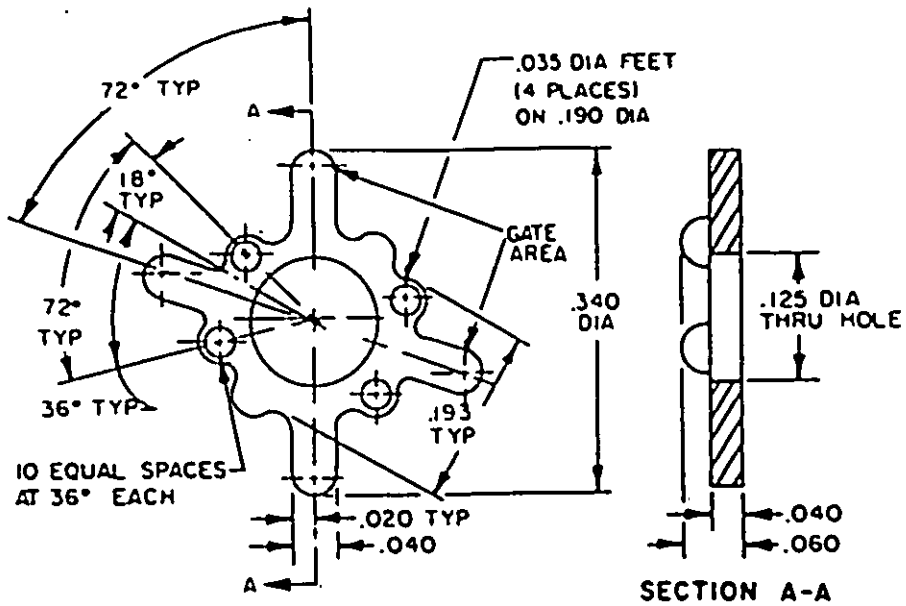

A-55485/06-013

Inches	mm
.020	0.51
.035	0.89
.040	1.02
.060	1.52
.125	3.18
.190	4.83
.193	4.90
.340	8.64

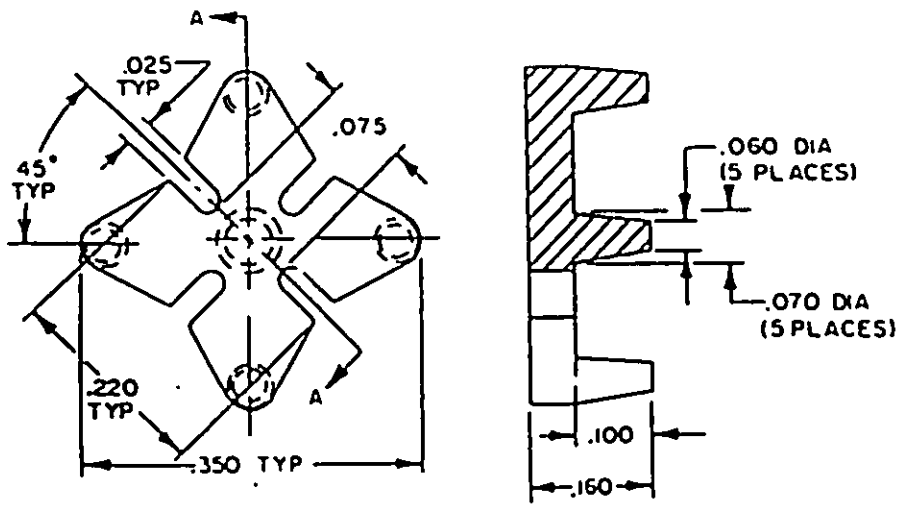


A-55485/06-014

Inches	mm
.025	0.64
.060	1.52
.070	1.78
.075	1.91
.100	2.54
.160	4.06
.220	5.59
.350	8.89


Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

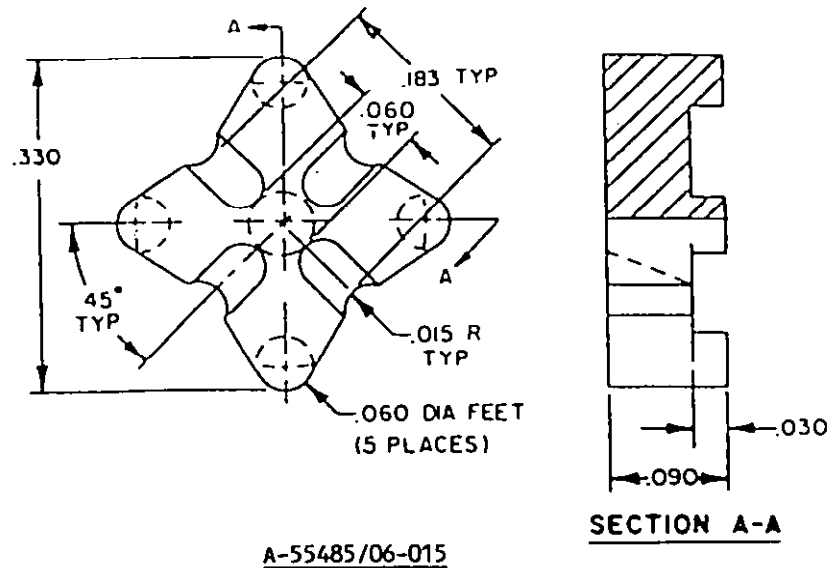

Inches	mm
.015	0.38
.030	0.76
.060	1.52
.090	2.29
.183	4.65
.330	8.38

A-55485/06-015

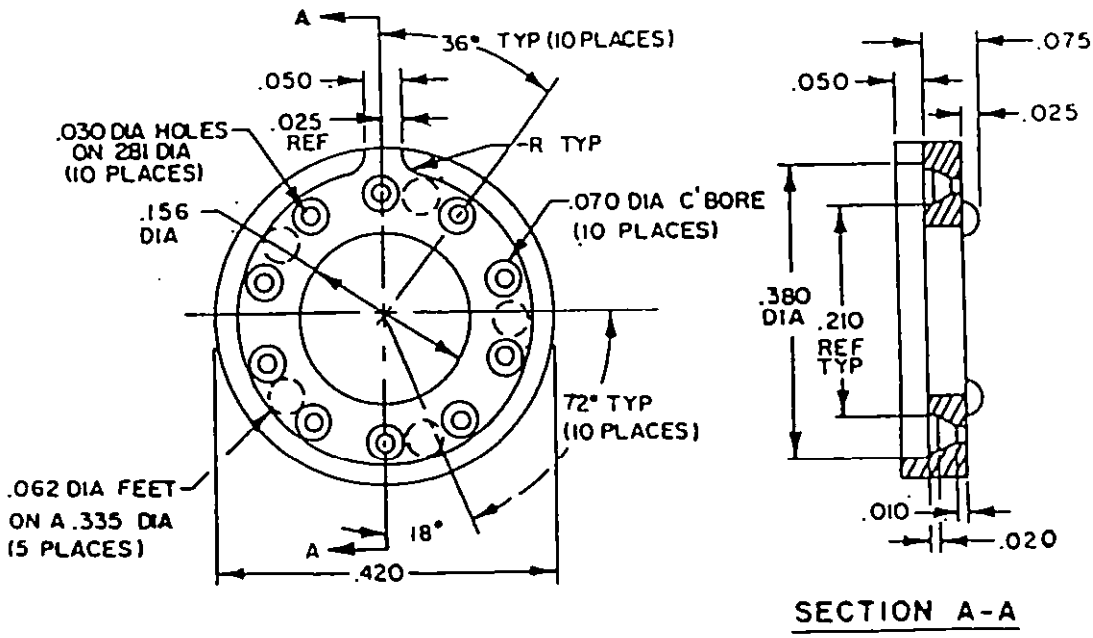


Inches	mm
.010	0.25
.020	0.51
.025	0.64
.030	0.76
.050	1.27
.062	1.57
.070	1.77
.156	3.96
.210	5.33
.281	7.14

A-55485/06-016

Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:48Z
Check the source to verify that this is the current version before use.

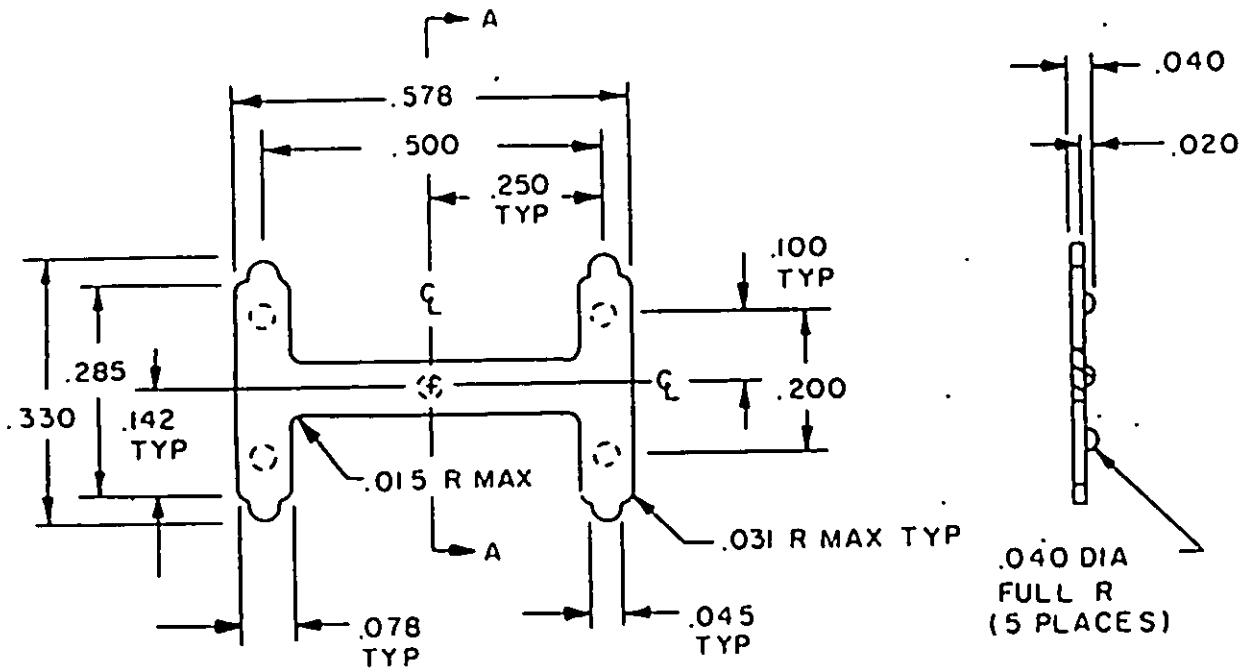


A-55485/06-022

SECTION A-A

Inches	mm
.015	0.38
.020	0.51
.031	0.71
.040	1.02
.045	1.14
.078	1.98
.100	2.54
.142	3.61
.200	5.08
.250	6.35
.285	7.24
.330	8.38
.500	12.70
.578	14.60

Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

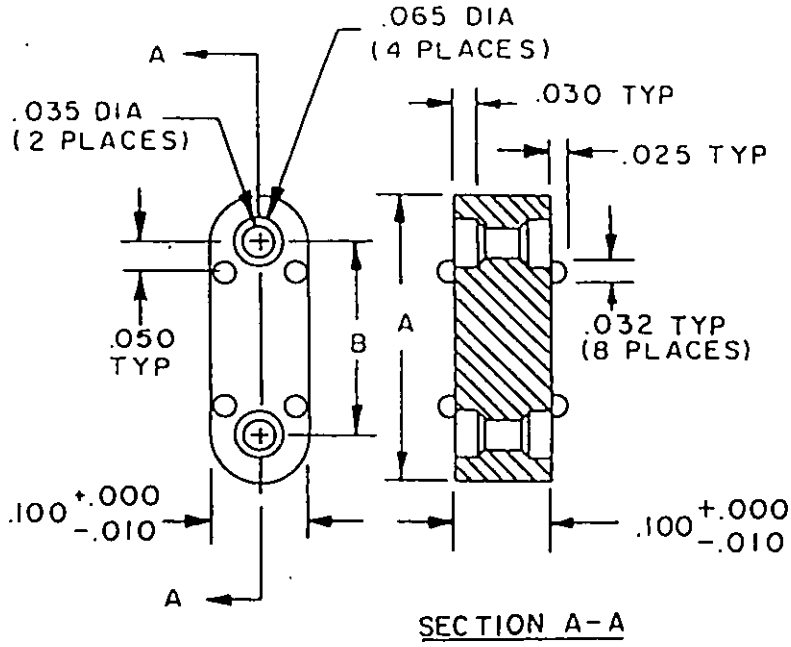


PIN A-55485/06-	A	B
023	.300 (7.62)	.200 (5.08)
024	.350 (8.89)	.250 (6.35)
025	.400 (10.16)	.300 (7.62)
026	.450 (11.43)	.350 (8.89)
027	.500 (12.70)	.400 (10.16)
028	.600 (15.24)	.500 (12.70)

Inches	mm
.025	0.64
.030	0.76
.032	0.81
.035	0.89
.050	1.27
.065	1.65
.100	2.54

Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

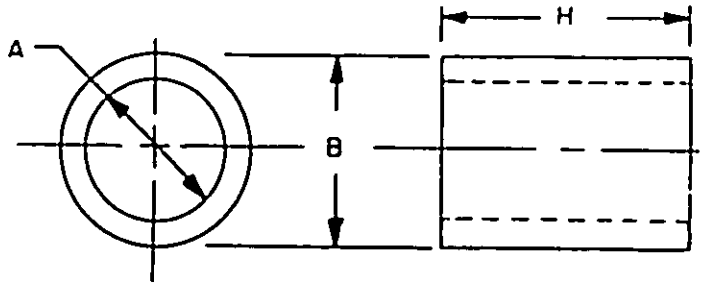


PIN A-55485/06-	"A" dimension ±.005 (0.13 mm)	"B" dimension ±.005 (0.13 mm)	"H" dimension*
029	.028 (0.71)	.085 (2.16)	.030 - 1.250 (0.76)-(31.75)
030	.032 (0.81)	.085 (2.16)	.030 - 1.250
031	.032 (0.81)	.125 (3.18)	.030 - 1.250
032	.047 (1.19)	.125 (3.18)	.030 - 1.250
033	.085 (2.16)	.148 (3.76)	.030 - 1.250
034	.047 (1.19)	.156 (3.96)	.030 - 1.250
035	.105 (2.67)	.167 (4.24)	.030 - 1.250
036	.063 (1.60)	.187 (4.75)	.030 - 1.250
037	.091 (2.31)	.187 (4.75)	.030 - 1.250
038	.120 (3.05)	.187 (4.75)	.030 - 1.250
039	.091 (2.31)	.250 (6.35)	.030 - 1.250
040	.115 (2.92)	.250 (6.35)	.030 - 1.250
041	.147 (3.73)	.250 (6.35)	.030 - 1.250
042	.171 (4.34)	.250 (6.35)	.030 - 1.250

* The following tolerances apply to dimension H:
.030 (0.76 mm) -.500 (12.70 mm): ±.005 (0.13 mm).
.505 (12.83 mm) -.750 (19.05 mm): ±.008 (0.20 mm).
.755 (19.18 mm) -1.250 (31.75 mm): ±.015 (0.38 mm).
Specific height (dimension H) shall be specified on the acquisition document. These heights are available in increments of .005 inch (0.13 mm).


Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

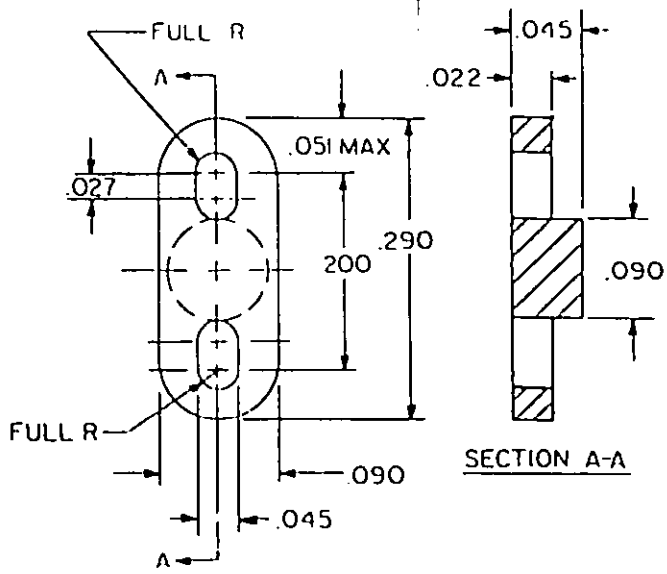

Inches	mm
.022	0.56
.027	0.69
.045	1.14
.051	1.30
.090	2.29
.200	5.08
.290	7.37

A-55485/06-043

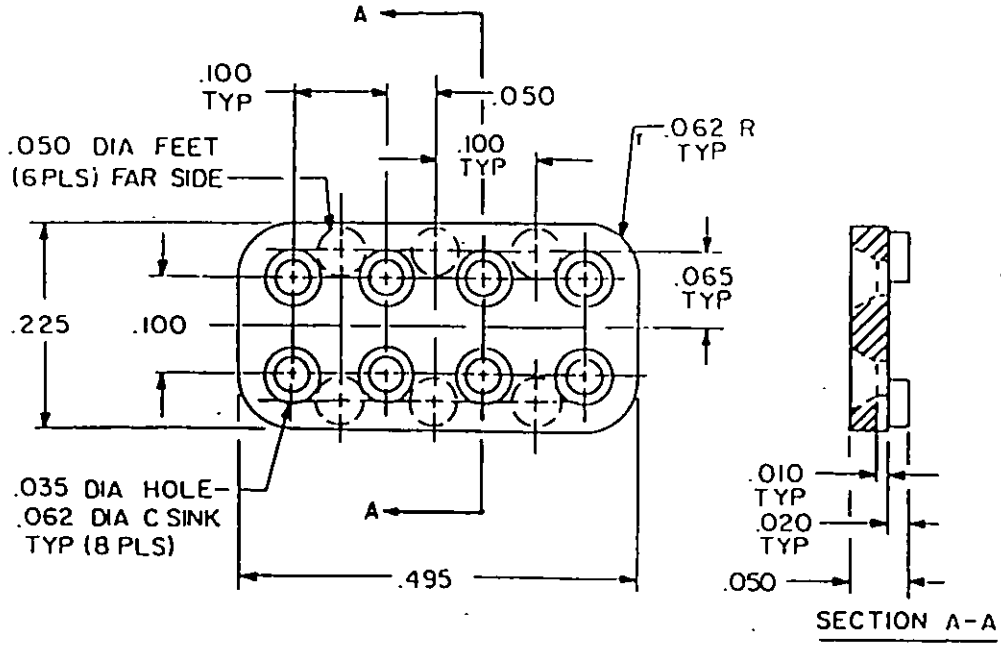


Inches	mm
.010	0.25
.020	0.51
.035	0.89
.050	1.27
.062	1.57
.065	1.65
.100	2.54
.495	12.57

A-55485/06-044

Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

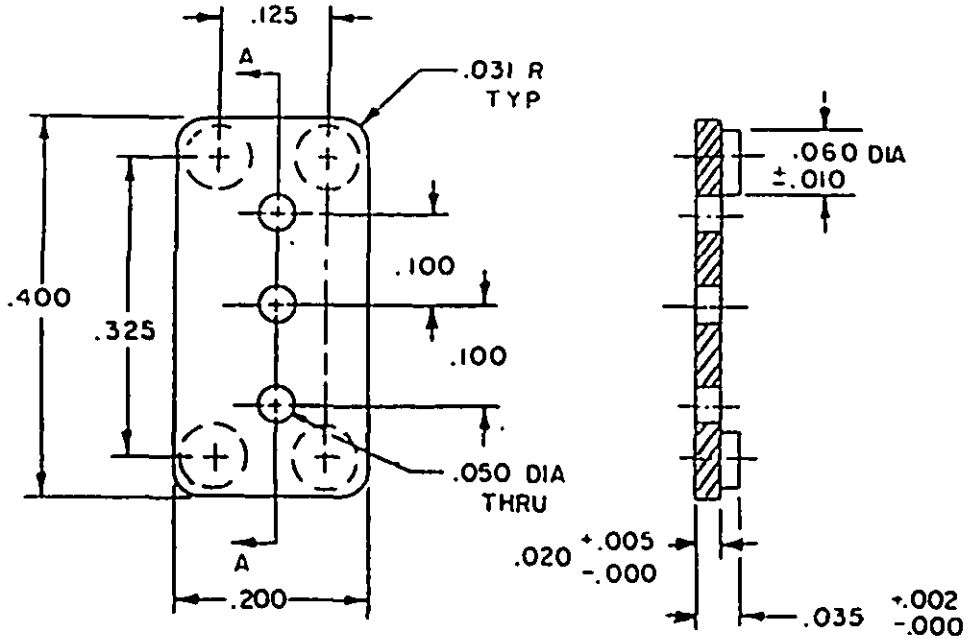


A-A-55485/6

Inches	mm
.002	0.05
.005	0.13
.020	0.51
.031	0.79
.035	0.89
.050	1.27
.060	1.52
.100	2.54
.125	3.18
.200	5.08
.325	8.26
.400	10.16

SECTION A-A

A-55485/06-045

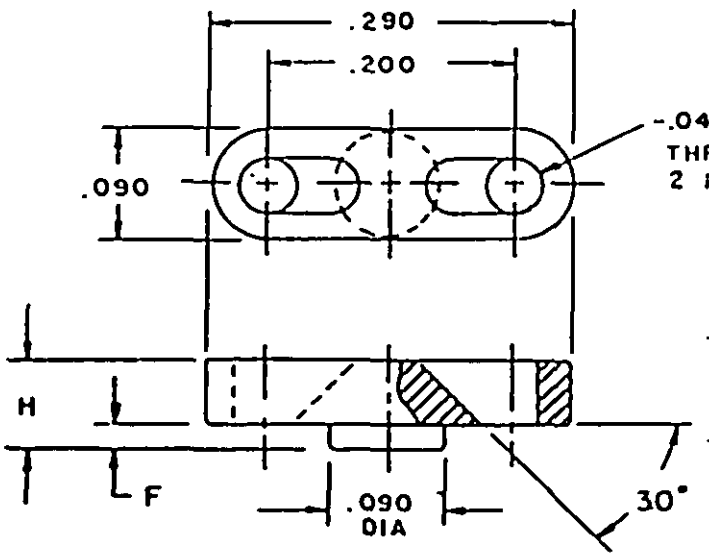

Inches	mm
.022	0.56
.035	0.89
.045	1.14
.050	1.27
.072	1.83
.085	2.16
.090	2.29
.200	5.08
.290	7.37

PIN A-55485/06-	H	F
046	.072	.022
047	.050	.000
048	.085	.035

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Tolerance on height of pads shall be ±.015 (0.38 mm).
4. Unless otherwise specified, tolerances are ±.010 (0.25 mm) for decimals and ±1° on angles.
5. A .010 (0.25 mm) radius is permissible on corners and edges and a 1° draft is permitted on sides.

Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE I. Suggested sources of supply. 1/

CID PIN (see figure 1) A-55485/06-	Vendor commercial PIN 2/						
	CAGE code 07047	CAGE code 13103	CAGE code 21071	CAGE code 24227	CAGE code 32559	CAGE code 53174	CAGE code 54355
001D	10105D	7717-175D	10364-2			AP-128/D	965-982D
001N	10105N	7717-175N	10364-1			AP-128/N	965-982N
001C			10364-3			AP-128/GP	965-982C
002D	10511D		10802-2			AP-402/D	965-592D
002N	10511N		10802-1			AP-402/N	965-592N
002C			10802-3			AP-402/GP	965-592C
003D	10537D		10760-2			AP-481/D	965-579D
003N	10537N	7717-129N	10760-1			AP-481/N	965-579N
003C			10760-3			AP-481/GP	965-579C
004D	10557D		10862-2			DIP-14-82/D	965-619D
004N	10557N		10862-1	4130	814-030	DIP-14-82/N	965-619N
004C			10862-3			DIP-14-82/GP	965-619C
005D	10558D					DIP-14-84/D	965-664D
005N	10558N	7717-156N		4160	814-060	DIP-14-84/N	965-664N
005C							
006D	10559D		10866-2			DIP-14-80/D	965-665D
006N	10559N		10866-1	4180	814-080	DIP-14-80/N	965-665N
006C			10866-3			DIP-14-80/GP	965-665C
007D	10560D						
007N	10560N			4360	816-060	DIP-16-85/N	965-663N
007C							
008D	10561D		10852-2			CX-010/D	965-609D
008N	10561N		10852-1	8100	300-100	CX-010/N	965-609N
008C			10852-3			CX-010/GP	965-609C
009D	10562D		10832-2			CX-015/D	965-669D
009N	10562N		10832-1	8150	301-150	CX-015/N	965-669N
009C			10832-3			CX-015/GP	965-669C
010D	10563D		10854-2			CX-020/D	965-671D
010N	10563N		10854-1	8200	302-200	CX-020/GP	965-671N
010C			10854-3			CX-020/GP	965-671C
011D	10259D		10686-2			AP-504/D	965-673D
011N							
011C			10686-3				965-673C
012D	10134D		10324-2			AP-227/D	965-598D
012N	10134N		10324-1			AP-227/N	965-598N
012C			10324-3			AP-227/GP	965-598C

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE I. Suggested sources of supply - Continued. 1/

CID PIN (see figure 1) A-55485/06-	Vendor commercial PIN 2/						
	CAGE code 07047	CAGE code 13103	CAGE code 21071	CAGE code 24227	CAGE code 32559	CAGE code 53174	CAGE code 54355
013D	10010D						
013N	10010N						
013C							
014D	10265D						
014N	10265N						
014C							
015D	10269D		10546-2			AP-436/D	965-677D
015N	10269N		10546-1			AP-436/N	965-677N
015C			10546-3			AP-436/GP	965-677C
016D	10235D						
016N	10235N						
016C							
017D	10581D						
017N	10581N			8250	303-250	CX-2014/N	965-825N
017C							
018D	10582D		10562-2			CX-2015/D	965-830D
018N	10582N		10562-1	8300	304-300	CX-2015/N	965-830N
018C			10562-3			CX-2015/GP	965-830C
019D	10583D						
019N	10583N			8350	305-350	CX-2016/N	965-835N
019C							
020D	10584D		10565-2			CX-2017/D	965-840D
020N	10584N		10565-1	8400	306-400	CX-2017/N	965-840N
020C			10565-3			CX-2017/GP	965-840C
021D	10585D		10566-2			CX-2018/D	965-850D
021N	10585N		10566-1	8500	307-500	CX-2018/N	965-850N
021C			10566-3			CX-2018/GP	965-850C
022D			10602-2			AP-505/D	965-754D
022N			10602-1				965-754N
022C			10602-3				965-754C
023D							
023N		7731		8201	311-200	CX-8201/N	965-686N
023C							
024D							
024N		7732		8202	312-250	CX-8202/N	965-688N
024C							

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:48Z
Check the source to verify that this is the currentversion before use.

TABLE I. Suggested sources of supply - Continued. 1/

CID PIN (see figure 1) A-55485/06-	Vendor commercial PIN 2/						
	CAGE code 07047	CAGE code 13103	CAGE code 21071	CAGE code 24227 3/	CAGE code 32559 3/	CAGE code 53174 4/	CAGE code 54355 3/
025D							
025N		7733		8203	313-300	CX-8203/N	965-689N
025C							
026D							
026N		7734		8204	314-350	CX-8204/N	965-756N
026C							
027D							
027N		7735		8205	315-400	CX-8205/N	965-757N
027C							
028D							
028N		7736		8206	316-500	CX-8206/N	965-691N
028C							
029D							
029N				5XXX-F	901-XXX	BX-8001-XXX/N	965-765-XXXN
029C							
030D							
030N					938-XXX	BX-8002-XXX/N	965-781-XXXN
030C							
031D							
031N				5XXX-E	902-XXX	BX-8003-XXX/N	965-758-XXXN
031C							
032D							
032N					939-XXX	BX-8004-XXX/N	965-764-XXXN
032C							
033D							
033N				5XXX-A	906-XXX	BX-8005-XXX/N	965-807-XXXN
033C							
034D							
034N				5XXX-G	903-XXX	BX-8006-XXX/N	965-784-XXXN
034C							
035D			10682-2				965-766-XXXD
035N			10682-1	5XXX-B	907-XXX	BX-8007-XXX/N	965-766-XXXN
035C			10682-3				965-766-XXXC
036D							
036N				5XXX-H	904-XXX	BX-8008-XXX/N	965-759-XXXN
036C							

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE I. Suggested sources of supply. 1/

CID PIN (see figure 1) A-55485/06-	Vendor commercial PIN 2/						
	CAGE code 07047	CAGE code 13103	CAGE code 21071	CAGE code 24227 3/	CAGE code 32559 3/	CAGE code 53174 4/	CAGE code 54355 3/
037D							
037N				5XXX-M	913-XXX	BX-8009-XXX/N	965-760-XXXN
037C							
038D							
038N				5XXX-C	908-XXX	BX-8010-XXX/N	965-801-XXXN
038C							
039D							
039N				5XXX-J	910-XXX	BX-8011-XXX/N	965-787-XXXN
039C							
040D							
040N				5XXX-K	911-XXX	BX-8012-XXX/N	965-791-XXXN
040C							
041D			10640-2				965-770-XXXD
041N			10640-1	5XXX-D	905-XXX	BX-8013-XXX/N	965-770-XXXN
041C			10640-3				965-770-XXXC
042D							
042N				5XXX-L	912-XXX	BX-8014-XXX/N	965-797-XXXN
042C							
043D							
043N						CX-09-020/N	
043C						CX-09-020/GP	
044D	102750						
044N							
044C							
045D	103810						
045N							
045C							
046D							
046N					330-072	AP-498/N	965-847-XXXN
046C							
047D			10828-2				965-845D
047N			10828-1		330-050	AP-444/N	965-845N
047C			10828-3				965-845C
048D			10406-2				965-848D
048N			10406-1		330-085		965-848N
048C			10406-3				965-848C

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE I. Suggested sources of supply - Continued. 1/

1/ This table is not a qualified products list or an approved source list. The vendors listed have submitted Certificates of Compliance (see A-A-55485) to DESC-EMM; however, parts may be ordered from any manufacturer who agrees to supply products that meet all the requirements of this CID.

2/ Vendor commercial PIN's are given for reference only. Do not use these numbers for ordering purposes.

3/ CAGES 24227, 32559, and 54355: XXX in the PIN represents the "H" dimension (length).

4/ CAGE 53174: XXX in the PIN represents the "H" dimension (length). Nylon is standard material; other materials may be available and will be quoted on request.

Vendor CAGE number	Vendor name and address
07047	Milton Ross Company 262 Valley Road Warrington, PA 18976-2533 (215) 491-0600
13103	Thermalloy, Incorporated 2021 West Valley View Lane Dallas, TX 75381-0839 (214) 243-4321
21071	Globe Plastics, Incorporated 13477 Twelfth Street Chino, CA 91710-9998 (909) 464-1520
24227	Teknational Industries, Incorporated 480 Clinton Avenue South Rochester, NY 14620-1103 (716) 232-1291
32559	Bivar, Incorporated 4 Thomas Irvine, CA 92718-2512 (714) 951-8808
53174	APX Plastics Company 3407 Dalworth Street Arlington, TX 76011-6815 (817) 275-3883
54355	Accessories for Electronics, Incorporated 800 Merrick Road Baldwin, NY 11510-3593 (516) 546-1751

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE II. Supersession information. 1/

Superseded (old) PIN in accordance with MIL-M-38527/60: M38527/06-	Superseding (new) CID PIN A-55485/06-
001	001
002	002
003	003
004	004
005	005
006	006
007	007
008	008
009	009
010	010
011	011
012	012
013	013
014	014
015	015
016	016
017	017
018	018
019	019
020	020
021	021
022	022
023	023
024	024
025	025
026	026
027	027
028	028
029	029
030	030
031	031
032	032
033	033
034	034

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE II. Supersession information - Continued. 1/

Superseded (old) PIN in accordance with MIL-M-38527/6D: M38527/06-	Superseding (new) CID PIN A-55485/06-
035	035
036	036
037	037
038	038
039	039
040	040
041	041
042	042
043	043
044	044
045	045
046	046
047	047
048	048

1/ Complete PIN shall include a suffix letter to denote material.

MILITARY INTERESTS:

Custodians

Army - ER
Navy - EC
Air Force - 85

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

PREPARING ACTIVITY:

DLA-ES

(Project 5999-0313-06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.