INCH-POUND

MIL-PRF-87108B (USAF)
16 June 1998
SUPERSEDING
MIL-I-87108A
1 June 1977

PERFORMANCE SPECIFICATION

INFLATION DEVICE, FLU-2A/P

This specification is approved for use by San Antonio Air Logistics Center, Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the mechanical inflation device, FLU-2A/P, which is designed for use with LRU-16/P and LRU-17/P inflatable life rafts.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of these lists, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto**,** cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be adderssed to: Engineering Division, San Antonio Air Logistics Center/TILDD, Kelly AFB, TX 78241, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 4220

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:48Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

BB-N-411	-	Nitrogen, Technical

DEPARTMENT OF DEFENSE

MIL-L-83491	-	Life Rafts, Inflatable, LRU-16/P and LRU-17/P
MIL-C-7905	-	Cylinders, Steel, Compressed Gas, Non-Shatterable, Seamless, 1800 psi and 2100 psi

STANDARDS

FEDERAL

FED-STD-H28	-	Screwthread Standards for Federal Services

(Unless otherwise indicated, copies of the above specifications, standard, and handbooks are available from the Defense Automated Printing Service, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS

AIR FORCE

76212	-	Life Rafts, Inflatable, LRU-16/P and LRU-17/P
76277	-	Valve, Check, Inlet

(Copies of drawings required by contractors should be obtained from the procuring activity or as directed by the procuring activity.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the applicable issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR QUALITY (ASQ)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:48Z
Check the source to verify that this is the current version before use.

ANSI/ASQ Z1.4 - Sampling Procedures and Tables for Inspection by Attributes (DoD-adopted)

(Application for copies should be addressed to the American Society for Quality, P.O. Box 3066, Milwaukee, WI 53201-3066, or to the American National Standards Institute, 11 West 42nd Street, 13th Floor, New York, NY 10036.)

RADIO TECHNICAL COMMISSION FOR AERONAUTICS (RTCA)

RTCA/DO-160 - Environmental Conditions and Test Procedures for Airborne Equipment

(Application for copies should be addressed to the RTCA, Inc., 1140 Connecticut Ave, NW, Suite 1020, Washington, DC 20036-4001.)

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated specifications or specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3.0 REQUIREMENTS

3.1 First article. When specified in the acquisition documents (see 6.2), samples shall be subjected to first article inspection.

3.2 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle cost.

3.3 Materials. All materials shall resist, or be suitably treated to resist corrosion due to electrolytic decomposition, salt spray, and any other atmospheric condition that may be encountered during operational use or storage. The use of toxic chemicals, hazardous substances, or ozone depleting chemicals (ODCs) shall be avoided, whenever feasible.

3.4 Components. The inflation device shall consist of at least a container for the inflation medium and a transfer assembly (see figure 1).

3.4.1 Container. The container shall be charged with 0.5, +0.01 or –0.02, pounds (lbs) of an inflation medium (see 6.2 and 6.3). A cylinder conforming to MIL-C-7905, (except that the fragmentation resistance and qualification requirements shall not apply), or a similar container shall be used for the inflation medium container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:48Z
Check the source to verify that this is the current version before use.

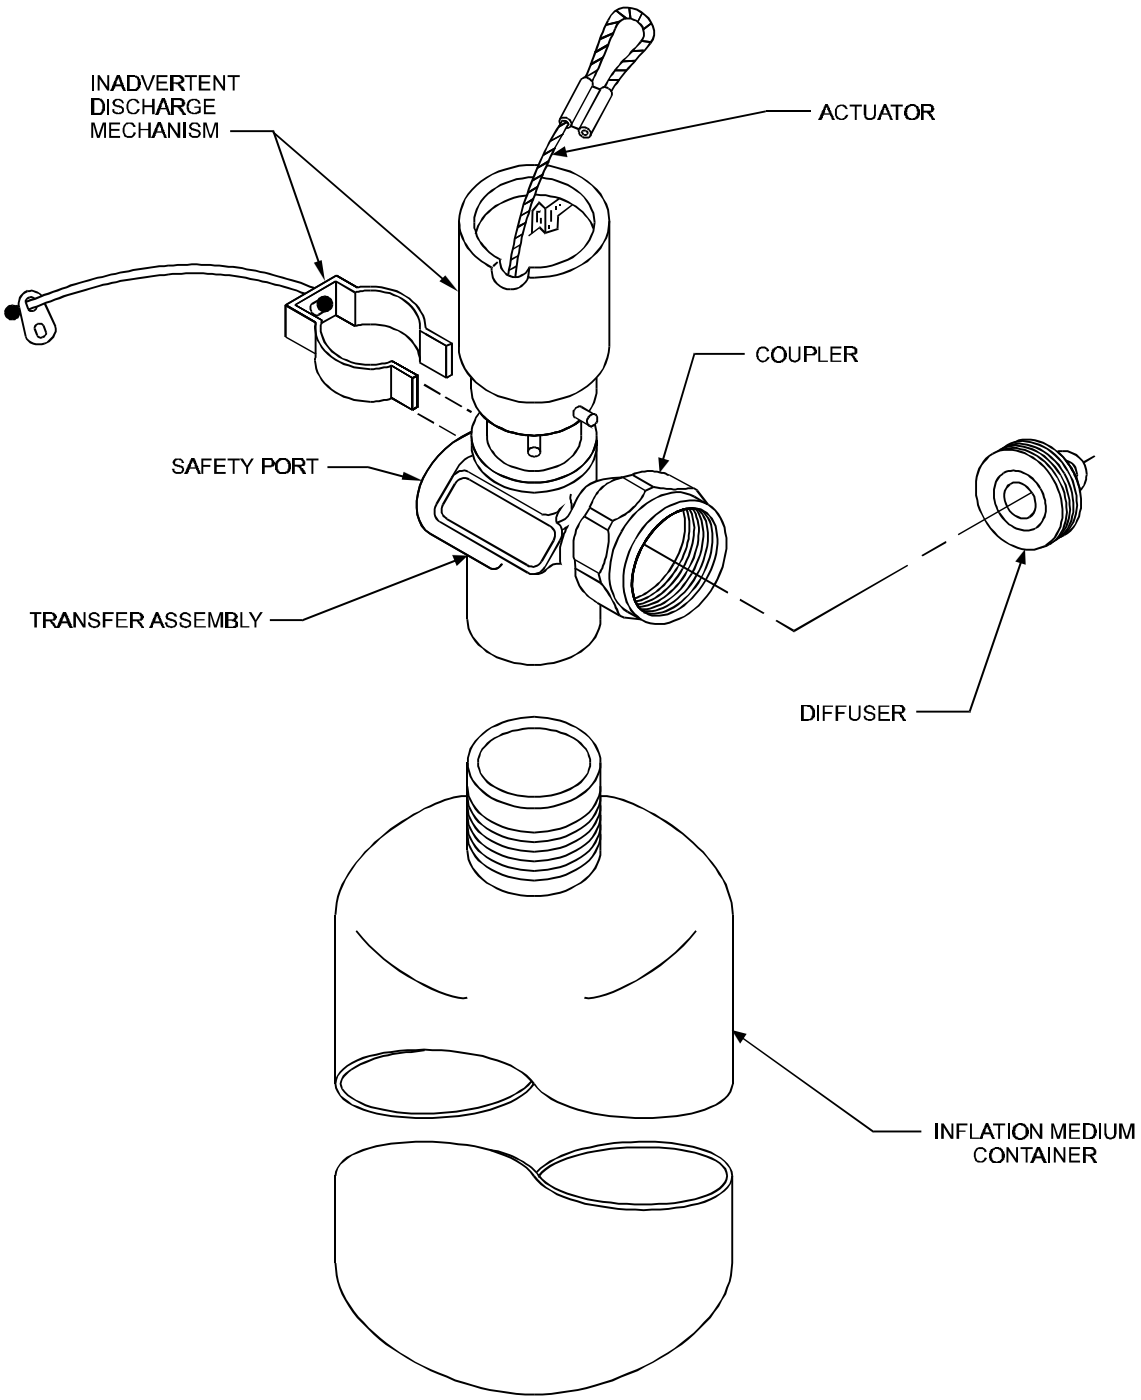


FIGURE 1. Inflation device (typical).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:48Z
Check the source to verify that this is the current version before use.

3.4.2 Transfer assembly. The transfer assembly shall consist of a diffuser, a coupler, and a manual actuating device. The transfer assembly shall also have an outlet, an inlet, a safety port, and an opening for venting air from a packed life raft. The device, upon actuation, shall inflate an LRU-16/P or LRU-17/P life raft to its designed shape, size, and at least minimum, but not more than maximum pressure within 30 seconds.

3.4.2.1 Inadvertent discharge. The transfer assembly shall incorporate a device which, until removed, prevents inadvertent, unintended discharge of inflation medium.

3.4.2.2 Diffuser. The transfer assembly shall include a removable diffuser to dissipate the thrust of the inflation medium in the case of damage or mishandling resulting in an inadvertent discharge. The diffuser shall be capable of insertion and tightening into the coupler, and loosening and removal from the coupler without the use of tools. After proper tightening, it shall not loosen during transportation and storage.

3.5 Interface.

3.5.1 Compatibility. The inflation device shall be compatible with the LRU-16/P and LRU-17/P life rafts as described in MIL-L-83491.

3.5.2 Weight. The weight of the inflation device (less the diffuser) with a charged container shall not exceed 2.01 lbs.

3.5.3 Screw threads. Screw threads, if used on the inflation device, shall conform to FED-STD-H28 or any other commercially acceptable thread standard.

3.5.4 Coupler. The coupler shall attach the inflation device to the life raft connector conforming to AF Drawing 76212.

3.6 Removal of parts. The inflation medium container shall be rechargeable through the transfer assembly outlet without special tools. Other than removal of the diffuser, disassembly of the inflation device shall not be required to recharge the container.

3.7 Performance.

3.7.1 Leakage. With the transfer assembly in the closed position, the inflation device shall not leak when exposed to temperatures ranging from -65 to 160 °F.

3.7.2 Vent leakage. With the transfer assembly in the open position and 2.0 lbs per square inch gage (psig) pressure applied to the outlet of the transfer assembly, the leakage from the transfer assembly shall not exceed 0.2 psig/min.

3.7.3 Vent flow. With the transfer assembly in the off position, the flow of inflation medium through the transfer assembly opening shall be not less than 61 cubic inches per minute when a pressure of 8 inches of water is applied to the outlet of the transfer assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:48Z
Check the source to verify that this is the current version before use.

3.7.4 Actuator (manual system operation). The transfer assembly shall open fully when a load between 15 and 21 lbs is applied to the actuator, and shall be operable from any direction of pull.

3.7.5 Strength of actuator. The actuator shall withstand a force of 300 lbs without failure of any part.

3.7.6 Operation at 70 °F. When operated at a temperature of 70 °F, the inflation device transfer assembly shall discharge a minimum of 90 percent of the inflation medium in at least 5 seconds without leakage.

3.7.7 Operation at –20 °F. When operated at a temperature of –20 °F, the inflation device transfer assembly shall discharge a minimum of 50 percent of the inflation medium in at least 5 seconds without leakage.

3.7.8 Coupling torque. A tightening torque of 25 to 30 foot-pounds applied to the coupler shall not cause failure, permanent deformation of the coupler or leakage of the transfer assembly.

3.7.9 Operation. The inflation device shall operate freely under all normal operating conditions to which it might be subjected. Any time the inflation device is actuated, the actuator shall operate smoothly and without damage to, loss of, or loosening of any component. The inflation device shall continue to operate smoothly and without binding after any normal operation.

3.7.10 Pressure relief. A safety port shall release the inflation medium into the atmosphere in the event of excess container pressure. The safety port shall relieve the pressure, without damage to the inflation device, at a pressure between 3,150 and 3,500 psig.

3.8 Reliability. The inflation device shall have a reliability of 0.985 at a 90 percent confidence level.

3.9 Item identification. After a container has been charged it shall be legibly marked with the information below:

INFLATION DEVICE, FLU-2A/P
WEIGHT EMPTY: _____ pounds
WEIGHT OF INFLATION MEDIUM: _____ pounds
TOTAL WEIGHT: _____ pounds
DATE OF RECHARGE: _____
2100 PSI 147.63 KG/CM^2
NSN 4220-00-920-3651
US

3.9.1 Warning label. A red, non-conductive label with a white-lettered statement shall be permanently affixed to the inflation device and shall contain the following information:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:48Z
Check the source to verify that this is the current version before use.

WARNING

The diffuser shall be installed on coupling at all times except when the inflation device is connected to the raft manifold or during charging operations.

3.10 Interchangeability. All parts having the same manufacturer's part number shall be functionally and dimensionally interchangeable.

3.11 Environmental. The inflation device shall not inadvertently discharge or show evidence of damage, such as cracks, permanent corrosion, deformation, leaks, or other flaws, during or after exposure to the environmental conditions below, and shall function as specified.

a. Exposure to atmosphere containing salt-laden moisture.
b. Vibration incident to service use.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2).
b. Conformance inspection (see 4.3).

4.2 First article inspection. When specified by the procuring activity (see 6.2), five sample inflation devices and two uncharged inflation medium containers shall be subjected to the all the inspections and tests in 4.6 and 4.7. The first article inspection for the two uncharged inflation medium containers shall be conducted in accordance with an industrially accepted test procedure or, if cylinders are used, the first article inspection described in MIL-C-7905, including the endurance test and the flattening test.

4.3 Conformance inspection. Conformance inspection shall include tests (see 4.3.1 and 4.3.2).

4.3.1 Individual tests. Each inflation device or inflation medium container shall be subjected to the tests below:

a. Visual Examination (see 4.6.1)
b. Leakage at +70 °F (see 4.6.4.1)
c. Weight (see 4.6.3)

4.3.2 Sampling inspection. Samples of inflation devices shall be selected from a lot of completed inflation devices in accordance with inspection Level II of ANSI/ASQ Z1.4, or equivalent, and subjected to a vacuum leak test (see 4.3.3).

4.3.3 Vacuum leak test. The charged inflation device shall be subjected to a vacuum of at least 1×10^{-3} millimeters of mercury (mm Hg) for at least 24 hours in a suitable bell jar or vacuum

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:48Z
Check the source to verify that this is the current version before use.

chamber. Following the vacuum leak test, when measured using a scale accurate to at least 0.002 lbs, there shall be no loss in weight.

4.4 Requirements cross-reference matrix. Table I provide a cross-reference matrix of the section 3 requirements tested or verified in the paragraphs below.

TABLE I. Requirements cross-reference matrix.

REQUIREMENT	VERIFICATION	REQUIREMENT	VERIFICATION
3.3	4.6.1	3.7.3	4.6.8
3.4	4.6.1	3.7.4	4.6.9
3.4.1	4.6.1	3.7.5	4.6.16
3.4.2	4.6.1, 4.6.9	3.7.6	4.6.10
3.4.2.1	4.6.1	3.7.7	4.6.11
3.4.2.2	4.6.1	3.7.8	4.6.12
3.5.1	4.6.1	3.7.9	4.6.13
3.5.2	4.6.3	3.7.10	4.6.14
3.5.3	4.6.1	3.8	4.6.15
3.5.4	4.6.1	3.9	4.6.1
3.6	4.6.1	3.10	4.6.1
3.7.1	4.6.4, 4.6.5, 4.6.6	3.11	4.7
3.7.2	4.6.7		

4.5 Inspection conditions.

4.5.1 Test items. Unless otherwise indicated in the test procedures, all performance, environmental, and test requirements are based on an inflation device complete with replaceable components.

4.5.2 Test conditions. Unless otherwise specified in the test procedures, all required tests shall be conducted under the ambient conditions, i.e., atmospheric pressure of 28 to 32 inches of mercury, temperature of 59 to 95 °F, and relative humidity of not more than 80%. If conditions change during a test, the test shall be suspended and appropriate corrections applied before resuming the test. Unless otherwise indicated in the test procedures, test sample temperature conditioning shall be at least one hour longer than that required for the sample to reach thermal equilibrium.

4.5.3 Nitrogen. Where gaseous nitrogen is specified for an inspection method, grade B of BB-N-411, type 1, class 1 shall be used.

4.5.4 Drying. Unless otherwise specified herein, the inflation assembly shall be thoroughly dried upon completion of any inspection that requires it to be immersed in a liquid.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:48Z
Check the source to verify that this is the current version before use.

4.5.5 Inlet check valve. If an inlet check valve is specified for a test, it shall conform to AF Drawing 76227.

4.5.6 Container charge. Unless otherwise specified herein, each inflation medium container shall be charged with 0.5, +0.01, –0.02, lbs of inflating medium.

4.6 Tests.

4.6.1 Visual Examination. An inflation device shall be examined to determine compliance with materials, components, compatibility, screw threads, coupler, parts removal, identification, and interchangeability requirements.

4.6.2 Leakage. When exposed to temperatures of –65, +70, and +160 °F for a seven day period, a charged inflation device shall have no loss in weight. A scale accurate to at least 0.002 lbs shall be used to weigh the inflation devices.

4.6.3 Weight. The weight of the charged inflation device (less diffuser) shall not exceed 2.01 lb. A scale accurate to at least 0.002 lbs shall be used to weigh the inflation device.

4.6.4 Leakage at 70 °F.

4.6.4.1 Single closed position. With the transfer assembly in the closed position, an inflation device and a collection device shall be submerged in water maintained at a temperature of 70 ± 5 °F. The submerged inflation device shall be held stationary, in a vertical position, and temperature stabilized for a minimum of 30 minutes. There shall be no leakage from the transfer assembly into the collection device.

4.6.4.2 Both closed positions (cam head design). If a cam head design is used, the inflation device shall be tested twice as described in 4.6.4.1, except as follows: the transfer assembly shall be cocked on one end of the two opposite flats on the cam head during the first test, and on the other end of the cam head flat during the second test. There shall be no leakage from the transfer assembly into the collection device during either test.

4.6.5 Leakage at 160 °F. With the transfer assembly in the closed position, an inflation device and a collection device shall be held stationary in a vertical position and submerged in water heated to and maintained at a temperature of 160 ± 5 °F for a minimum of 30 minutes. There shall be no leakage from the transfer assembly into the collection device.

4.6.6 Leakage at –65 °F. With the inflation medium container removed from the transfer assembly, a closed transfer assembly and a collection device shall be submerged in a non-freezing liquid chilled to a temperature of –65 ± 5 °F. The transfer assembly shall be held stationary in the vertical position. After the transfer assembly has been temperature stabilized at –65 ± 5 °F for at least 30 minutes, it shall be pressurized with nitrogen gas to at least 1,000 psig, applied to the inlet of the closed transfer assembly. The source of the nitrogen gas shall be shut off and the

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:48Z
Check the source to verify that this is the current version before use.

transfer assembly shall be allowed to reach ambient conditions. When the pressure has stabilized at a minimum value, the pressure shall be further reduced manually to 100 psig. The pressure at the transfer assembly shall be maintained for at least 30 minutes after temperature stabilization. There shall be no leakage from the transfer assembly.

4.6.7 Vent leakage. With the inlet of an open transfer assembly plugged, a gas pressure of 2.0 psig shall be applied at the outlet of the transfer assembly. Any gas leakage shall be trapped in a suitable container with a maximum volume of 1 cubic inch. There shall be no pressure decay greater than 0.2 psig/min. Nitrogen, oxygen, air, or carbon dioxide may be used for this test.

4.6.8 Vent flow. A gas pressure equivalent to 8 inches of water shall be applied to the outlet of a closed transfer assembly. The gas flow past the vent opening shall be less than 61 cubic inches per minute. Nitrogen, oxygen, air, or carbon dioxide may be used for this test.

4.6.9 Actuator operation. A charged inflation device, with the transfer assembly in the closed position, shall be connected to an LRU-16/P or LRU-17/P life raft. Using a measuring device that is accurate to 0.25 lbs, the force required to actuate the transfer assembly shall be determined. The force applied to the actuator shall be parallel to the longitudinal axis of the transfer assembly. The transfer assembly shall open fully with an operating force of at least 15 lbs but not more than 21 lbs. The inflation device shall inflate the LRU-16/P or LRU-17/P inflatable life raft to its designed shape, size, and minimum pressure within a maximum of 30 seconds. No damage to the transfer assembly body or the actuator shall occur as the result of the inflation or actuator operation.

4.6.10 Operation at 70 °F. An inlet check valve (see 4.5.6) is required for this test and shall be installed in the transfer assembly. A charged inflation device, with the diffuser removed, shall be stabilized at a temperature of 70 ± 5 °F. Once stabilized, it shall be weighed on a scale or balance accurate to at least 0.002 lbs, to the nearest 0.01 lb. While maintaining the inflation device at 70 ± 5 °F , it shall be securely restrained in a horizontal position and the transfer assembly activated for not more than 5 seconds. The transfer assembly shall then be securely closed. The venting of inflating medium into the atmosphere shall be observed. Immediately following the discharge, the transfer assembly shall be wiped dry and reweighed. The inflation device shall have discharged a minimum of 90 percent of the inflating medium charge, by weight, in not more than 5 seconds, without leakage from the transfer assembly body. For this test, a cocking tool may be substituted for the actuator.

4.6.11 Operation at -20 °F. An inlet check valve shall be installed in the transfer assembly. A charged inflation device, with the diffuser removed, shall be stabilized at a temperature of –20 ± 2 °F. Once stabilized, it shall be weighed on a scale or balance accurate to at least 0.002 lbs, to the nearest 0.01 lb. While maintaining the inflation device at –20 ± 2 °F, it shall be securely restrained in a horizontal position and the transfer assembly activated for not more than 5 seconds. The transfer assembly shall then be securely closed. The venting of inflating medium into the atmosphere shall be observed. Immediately following the discharge, the transfer assembly shall be wiped dry and reweighed. The inflation device shall have discharged a minimum of 50

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:48Z
Check the source to verify that this is the current version before use.

percent of the inflating medium charge, by weight, in not more than 5 seconds, without leakage from the transfer assembly body. For this test, a cocking tool may be substituted for the actuator.

4.6.12 Coupling torque. With the diffuser removed and a transfer assembly in the open position, install or attach a safety plug to the coupler of the transfer assembly with a torque of 25 ft lb. The transfer assembly shall be submerged in water at a temperature of 70 ± 5 °F. Using nitrogen gas at 15 psig, pressurize the inlet of the transfer assembly for a minimum of 60 seconds. No leakage shall be noted. Remove the transfer assembly from the water, and without making adjustments, examine the assembly. There shall be no evidence of failure or permanent deformation of the coupler or leakage of the transfer assembly.

4.6.13 Gravity drop test. The inflation device shall be subjected to three individual gravity drop, or free fall, operation tests. The gravity drop operation test shall be performed with an inflation device in the following orientations:

a. Vertical position with the actuator down.
b. Horizontal position.
c. Vertical position with the actuator uppermost.

An inflation device, containing a diffuser, shall be securely restrained in a jig or vise. A 6 foot line of sufficient strength shall be attached to the actuator. A 50 ± 0.5 lb weight shall be attached to the opposite end of the line. The weight shall then be allowed to free fall so that the full force of the accelerated mass shall be applied to the actuator through the line. After each of the three gravity drop operation tests, the inflation device shall meet the requirements as specified in 3.7.9. After the completion of the three gravity drop operation tests, the inflation device shall be subjected to and shall meet the requirements described (see 4.6.4.1, 4.6.4.2, 4.6.7, 4.6.8, 4.6.9, 4.6.10, and 4.6.11 in the sequence listed).

4.6.14 Pressure relief. This test is applicable to designs which incorporate frangible disc overpressure relief devices. With the transfer assembly in the closed position, an inflation device shall be immersed in water at a temperature of 160 ± 5 °F for a minimum of 15 minutes. The inflation device shall be removed from the water and, while the transfer assembly is still at 160 ± 5 °F, hydraulic pressure shall be applied to the inlet of the transfer assembly at the rate of approximately 100 psig/sec until the frangible disc bursts. The frangible disc shall burst at a pressure between 3,150 and 3,500 psig with no damage to the transfer assembly.

4.6.15 Reliability demonstration. Inflation devices shall be cycled sufficient times to demonstrate a 0.985 reliability at a confidence of 90%. A cycle shall consist of one charge and one discharge. The container shall be charged though the outlet of the transfer assembly with 0.5 ± 0.01 lb of inflating medium, using standard recharging equipment. During the discharging, the inflation device shall be securely restrained and a diffuser shall be installed following the reliability demonstration, each inflation device involved in the reliability test shall pass the tests described (see 4.6.4.1, 4.6.4.2, 4.6.7, 4.6.8, 4.6.9, 4.6.10, and 4.6.11 in the sequence listed).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:48Z
Check the source to verify that this is the current version before use.

4.6.16 Strength of actuator. The actuator strength shall be demonstrated using any industrially accepted test procedure.

4.7 Environmental conditions. At the completion of the environmental tests, the inflation device shall meet the requirements as described (see 4.6.4.1, 4.6.4.2, 4.6.7, 4.6.8, 4.6.9, 4.6.10, and 4.6.11 in the sequence listed).

4.7.1 Salt fog. An inflation device, with a closed transfer assembly, shall be placed in a horizontal position to simulate the position of the inflation device when attached to the life raft and that will permit the salt atmosphere to circulate completely around the inflation device. For this test, the inflation device shall contain a diffuser. Any holes in the diffuser shall be sealed or plugged to prevent the entry of salt fog. The inflation device shall be exposed to salt fog in accordance with RTCA/DO-160, Section 14, Category S.

4.7.2 Vibration. An inflation device shall be in the closed position and shall contain a diffuser and a charged container. The inflation device shall be weighed on a scale or balance, accurate to at least 0.002 lbs, to the nearest 0.01 lb. The inflation device shall be securely restrained and then vibrated for at least 8 hours along each of three mutually perpendicular axes of the transfer assembly at an amplitude of 0.060 inch and at a frequency of 10 to 55 Hertz in 1-minute cycles. The total vibration time shall be at least 24 hours. This test may be conducted with or without rest periods between the 8-hour vibration cycles in the different planes. No adjustments to the inflation device shall be made during the vibration test. At the completion of the vibration test, the inflation device shall be reweighed. There shall be no loss in weight.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of material is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The inflation device covered by this specification is intended to be used as a component of the mechanical inflation system of the LRU-16/P and LRU-17/P one man, inflatable life rafts.

6.2 Acquisition requirements. Acquisition documents must specify the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:48Z
Check the source to verify that this is the current version before use.

a. Title, number, and date of this specification.

b. Issue of the DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.2.1, and 2.3).

c. When first article is required (see 3.1 and 4.3).

d. The inflation medium, if a specific medium is required (see 3.4.1).

e. Packaging requirements (see 5.1).

6.3 Inflation medium. Carbon dioxide that conforms to grade B of BB-C-101 has proven to be an acceptable inflation medium.

6.4 Subject term (key word) listing.

Actuator
Diffuser
Container
Inflation medium
Transfer assembly

6.5 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Air Force - 99

Preparing Activity:
Air Force - 82

(Project No. 4220-F080)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:48Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** MIL-PRF-87108B	**2. DOCUMENT DATE (YYMMDD)** 98/06/16

3. DOCUMENT TITLE
Inflation Device, Automatic – FLU-9A/P

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. Organization	
c. ADDRESS *(Include zip code)*	**d. TELEPHONE** *(Include Area Code)* (1) Commercial (2) DSN *(if applicable)*	**7. DATE SUBMITTED (YYMMDD)**

8. PREPARING ACTIVITY

a. NAME SA-ALC/TILDD	**b. TELEPHONE** *(Include Area Code* (1) Commercial 210-925-6314 (2) DSN 945-6314
c. ADDRESS ***(Include Zip Code)*** 485 Quentin Roosevelt Rd. Kelly AFB, Texas 78241-6425	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** **Defense Quality and Standardization Office** **5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466** **Telephone (703) 756-2340 DSN 289-2340**

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:48Z
Check the source to verify that this is the current version before use.