INCH-POUND

MIL-S-82849(OS)
5 February 1990
SUPERSEDING
WS 25355
19 January 1987
WS 21534
8 November 1983

MILITARY SPECIFICATION

SWITCH, ARM ENABLE, ROCKET MOTOR MK 104

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 **Scope.** This specification covers the Mk 104 Rocket Motor Arm Enable Switch, referred to herein as the switch (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 **Government documents.**

2.1.1 **Specifications, standards and handbooks.** The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

MILITARY

MIL-F-7179 Finishes, Coatings, and Sealants for the Protection of Aerospace Weapons Systems

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer, Naval Ordnance Station, Standardization Branch (3730), Indian Head, MD 20640-5000, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 1340

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:29Z
Check the source to verify that this is the current version before use.

MIL-S-7742	Screw Threads, Standard, Optimum Selected Series, General Specification for
MIL-B-7883	Brazing of Steels, Copper, Copper Alloys, Nickel Alloys, Aluminum, and Aluminum Alloys
MIL-W-8611	Welding, Metal Arc and Gas, Steels, and Corrosion and Heat Resistant Alloys, Process for
MIL-W-22759	Wire, Electric, Fluoropolymer Insulated, Copper or Copper Alloy
MIL-H-46855	Human Engineering Requirements for Military Systems, Equipment and Facilities

STANDARDS

MILITARY

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-454	Standard General Requirements for Electronic Equipment
MIL-STD-889	Dissimilar Metals
MIL-STD-970	Standards and Specifications, Order of Preference for the Selection of
MIL-STD-1472	Human Engineering Design Criteria for Military Systems, Equipment and Facilities
MIL-STD-1695	Environments, Working, Minimum Standards for

HANDBOOKS

MILITARY

MIL-HDBK-5	Metallic Materials and Elements for Aerospace Vehicle Structures

(Unless otherwise indicated, copies of federal and military specifications, standards and handbooks are available from: Military Specifications and Standards, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.1 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:29Z
Check the source to verify that this is the current version before use.

DRAWINGS

NAVAL SEA SYSTEMS COMMAND (CAGE Code 10001)

6204118 Switch, Arm Enable, Rocket Motor, Mk 104

6204129 Subminiature Switch, Arm Enable

(Application for copies of drawings should be addressed to Commanding Officer, Naval Ordnance Station, Attn: Code 802, Louisville, KY 40214-5001.)

PUBLICATIONS

WS 6536 Procedures and Requirements for Preparation and Soldering of Electrical Connections

(Application for copies of WS 6536 should be addressed to Commander, Naval Air Systems Command (Attn: AIR 51122E) Washington, D.C. 20361-5110.)

NAVAL SEA SYSTEMS COMMAND (CAGE Code 10001)

WR-43 Preparation of Quality Assurance Provisions (Including Classification of Characteristics)

(Copies of WR-43 are available from the Commanding Officer, Naval Publications and Forms Center, Attn: 1053, 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.2 **Non-Government publications.** The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2.).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 3951 Standard Practice for Commercial Packaging (DoD adopted)

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services).

2.3 **Order of precedence.** In the event of a conflict between the text of this document and the references cited herein, the text of this document takes

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:29Z
Check the source to verify that this is the current version before use.

precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample of the switch shall be subjected to first article inspection (see 6.3) in accordance with 4.5.

3.2 Design. The switch specified herein shall be a mechanically actuated mechanism which shall enable electrical arming of the arming-firing device (AFD) of the rocket motor. The switch shall consist of a spring loaded arming lever and a subminiature electrical switch.

3.2.1 Arming lever.

3.2.1.1 Auto-return to safe. During the function of the switch, the arming lever of the unit shall automatically return to the SAFE position from the ARM ENABLE position (see 3.3.1.1).

3.2.1.2 Rotation angle. The arming lever shall pass through an angle of 82 degrees minimum with applied force (see 3.3.1.2).

3.2.2 Switch mechanism.

3.2.2.1 Function. The switch mechanism shall close the subminiature electrical switch to ARM ENABLE the AFD and open the switch to SAFE the circuit (see 3.3.2.1).

3.2.2.2 Auto-return to safe. The switch mechanism shall automatically return to the SAFE condition from the ARM ENABLED condition upon removal of the force applied to the arming lever.

3.3 Performance characteristics.

3.3.1 Arming lever.

3.3.1.1 Rate of auto-return to safe. The rate of return of the arming lever from the ARM ENABLE to the SAFE position shall not be faster than a constant rate of 80 degrees per second.

3.3.1.2 Arming forces. The forces on the arming lever shall meet the requirements of table I after the switch has been cycled to the full arm position ten times, minimum.

3.3.2 Switching mechanism.

3.3.2.1 Lever position requirements. The switching mechanism functions (see 3.2.2.1) shall conform to the lever position requirements specified in figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:29Z
Check the source to verify that this is the current version before use.

TABLE I. Arming forces.

Rotation angle	Pounds-force
0.4 degree maximum 1/	6 minimum
30 ± 1 degrees	25 minimum
80 ± 1 degrees	35 to 95

1/ This rotation angle is equal to a 0.005 inch movement of the arming lever to accurately measure the force at the 0 degree position (see figure 1).

3.3.3 **Cycle life.** The switch shall meet the requirements of 3.2.1.2, 3.2.2, 3.3.2.1 and 3.4 after being mechanically cycled from the SAFE (0 degree position) to the full ARM ENABLE position (82 degrees minimum) and back to SAFE 1000 times.

3.4 **Physical characteristics.**

3.4.1 **Dimensions.** The switch interface and envelope dimensions shall conform to the requirements of Drawing 6204118.

3.4.2 **Arming lever gap.** There shall be no gap between the outer housing and the arming lever when the arming lever is in the SAFE (0 degree) position (see figure 2).

3.4.3 **Switch leakage.** The switch, when installed on the rocket motor case, shall not show visible signs of leakage when pressurized to 25 pounds per square inch gage (psig) ± 5 psig with dry nitrogen.

3.4.4. **Electrical properties.** The switch electrical properties shall be as specified herein.

3.4.4.1 **Subminiature switch.** The subminiature switch shall meet the requirements of Drawing 6204129 except the direct current (dc) operating voltage shall be 28 +6, -2 volts direct current (vdc) at sea level.

3.4.4.1.1 **Functional current.** The subminiature switch shall be functional before and after application of a voltage of 28 +6, -2 vdc and a current of 1.50 ± 0.15 amperes (amps) for 30 ± 5 minutes.

3.4.4.2. **Resistance.**

3.4.4.2.1 **SAFE condition.** In the SAFE condition (0 degree position), resistance between each lead wire of the switch and the switch housing, and between the two lead wires shall be greater than 2 megohms minimum at 500 ± 50 vdc.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:29Z
Check the source to verify that this is the current version before use.

3.4.4.2.2 **ARM ENABLE condition.** In the ARM ENABLE condition (between 66.5 degrees and the full arm, stop position), the resistance between the two lead wires shall be 0.05 ohm maximum.

3.5 **Construction.**

3.5.1 **Materials, processes, and parts.** Materials and parts shall be selected for lightweight construction and simplicity of manufacture commensurate with the design. Unless necessary for the design application, critical and strategic materials shall not be used. No cleaning or plating processes shall be used which may degrade the structural integrity of the switch due to hydrogen embrittlement or stress corrosion.

3.5.1.1 **Selection of specifications and standards.** The selection of specifications and standards for materials, processes, and parts for use shall be in accordance with MIL-STD-970. The number of different types and sizes of hardware shall be kept to the minimum practicable.

3.5.2 **Threads.** Threads shall be in accordance with MIL-S-7742.

3.5.3 **Screws.** Screws shall be the self-locking type, wherever possible.

3.5.4 **Welds.** Welds shall be in accordance with MIL-W-8611.

3.5.5 **Brazing.** Brazing shall be in accordance with MIL-B-7883.

3.5.6 **Soldering.** Soldering of all electrical connections shall be in accordance with WS 6536.

3.5.7 **Wiring.** Wiring and terminal design shall be in accordance with MIL-W-22759 and shall include protection against environmental and mechanical hazards to prevent corrosion or shorting of circuits.

3.5.8 **Interchangeability.** Mechanical and electrical interchangeability shall exist between similar assemblies or subassemblies. Interchangeability requires the substitution of similar parts without physical modification to any part of the component, including cabling, wiring, and mounting.

3.6 **Materials.**

3.6.1 **Moisture and fungus resistance.** Materials shall be resistant to the corrosive action of salt air and damage from moisture and fungus in accordance with MIL-STD-454. Protective coatings shall be acceptable as moisture, fungus, and corrosion preventatives on parts which will not lose the coating during the normal course of inspection, operation, maintenance, and periodic test.

3.6.2 **Metals.** The properties of metals shall be in accordance with MIL-HDBK-5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:29Z
Check the source to verify that this is the current version before use.

3.6.2.1 **Dissimilar metals.** The switch shall exhibit maximum corrosion resistance between dissimilar metals in accordance with MIL-STD-889, and shall be insulated in accordance with MIL-F-7179 wherever contact is unavoidable.

3.6.3 **Plastics.** The use of plastics within the switch shall be limited to materials which will not outgas corrosively, creep under the applied load, or crack due to aging.

3.7 **Reliability.** The switch shall be designed to meet the performance requirements specified herein with a reliability goal of 0.998 at a confidence level of 50 percent. Performance data resulting from testing of first article test units shall be used for reliability determination.

3.8 **Maintainability.** The switch shall not require maintenance, repair, or component replacement during the storage life. In addition, the switch shall be capable of immediate use without checkout for at least three years after being placed in ready-service storage.

3.9 **Transportability.** The switch shall be transportable in a packaged condition by any appropriate transportation method available for military materials.

3.10 **Safety.**

3.10.1 **Safe condition.** The switch shall be electrically isolated from the arming circuit in the safe condition.

3.10.2 **Human factors.** The switch shall comply with the human engineering principles specified in MIL-H-46855 and MIL-STD-1472. Particular attention shall be given to, but not be limited to, the following areas:

a. Safety concerning:

(1) Mechanical, pyrotechnic and electrical equipment.

(2) Maintenance tasks to be performed, if applicable.

b. Synthesis of human procedures with designated manned position requirements without exceeding human performance limitations.

c. The number of personnel and skill level required for interface equipment maintenance, handling, and loading procedures, and including analysis of unique calibration, alignment, and test procedures.

3.11 **Environmental conditions.**

3.11.1 **Operating temperature.** The switch shall operate at temperatures ranging from 45 to 95°F.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:29Z
Check the source to verify that this is the current version before use.

3.11.2 **Storage temperature.** The switch shall withstand storage temperatures of -20 to 130°F.

3.11.3 **Heat soak.** The switch shall be operable after heat soak of 170 ± 5°F for a minimum of 170 hours.

3.12 **Working environment.** Unless otherwise specified in the contract or order (see 6.2), the working environment shall conform to the levels and requirements specified in MIL-STD-1695.

3.13 **Identification and marking.** Nameplates and product marking shall be in accordance with the applicable drawing.

3.14 **Workmanship.** Workmanship shall conform to the requirements of MIL-STD-454, Requirement 9. All subassembly parts and the assembled item shall be thoroughly cleaned of any foreign matter.

4. QUALITY ASSURANCE PROVISIONS

4.1 **Responsibility for inspection.** Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 **Responsibility for compliance.** All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, not does it commit the Government to accept defective material.

4.2 **Classification of inspections.** The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.5).

b. Quality conformance inspection (see 4.6).

4.3 **Inspection conditions.** Unless otherwise specified, all tests shall be conducted at 80 ± 30°F, 10 to 95 percent relative humidity, and a barometric pressure of 24 to 30 inches of mercury.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:29Z
Check the source to verify that this is the current version before use.

4.4 Classification of characteristics. The characteristics verified by the inspections herein are classified as Major or Minor in accordance with WR 43. Inspections that verify Major characteristics are identified by the symbol (M). The number following the classification symbol indicates the serial number of the inspection. Inspections which are not annotated with a classification code are classified minor.

4.5 First article inspection. First article inspection shall consist of the examination and tests specified in table II. Failure to conform to the requirements specified herein shall be cause for rejection of the first article sample.

4.6 Quality conformance inspection. Quality conformance inspection shall consist of the examination and tests specified in table II.

TABLE II. First article and quality conformance inspections.

Examination and Tests	Requirement	Inspection Method
Visual examination	3.4.1, 3.13, 3.14	4.7.1
Rotation angle	3.2.1.2	4.7.2
Auto return to SAFE	3.2.1.1, 3.2.2.2	4.7.3
Function/lever position	3.2.2.1, 3.3.2.1	4.7.4
Arming forces	3.3.1.2	4.7.5
Resistance	3.4.4.2.1, 3.4.4.2.2	4.7.6.1, 4.7.6.2
Leak test	3.4.3	4.7.7
Cycle life	3.3.3	4.7.8
Inspection of packaging	Section 5	4.7.9

4.6.1 Lot. A production lot shall be all switches produced from a single production run of machined parts.

4.6.2 One hundred percent inspection. Each switch in the lot shall be inspected as specified in 4.7.1 through 4.7.6.2. Noncompliance of a switch with any specified requirements or presence of one or more defects shall constitute cause for rejection of the switch.

4.6.3 Sampling.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:29Z
Check the source to verify that this is the current version before use.

4.6.3.1 **For leak test.** One switch shall be randomly selected from each 10 switches in the lot and tested as specified in 4.7.7. Failure of any one of the sample switches to meet the leakage requirements specified in 3.4.3 shall constitute cause for rejection of the lot.

4.6.3.2 **For cycle life test.** One switch shall be randomly selected from each lot of switches and tested as specified in 4.7.8. Failure of the sample switch to meet the cycle life requirements specified in 3.3.3 shall constitute cause for rejection of the lot. The cycle life test is a destructive test. Sample switches subjected to this test shall not be offered for acceptance by the Government.

4.7 **Methods of inspection.**

4.7.1 **Visual examination.** Each switch shall be examined for compliance with the requirements specified in 3.4.1, 3.13 and 3.14.

4.7.2 **Rotation angle.** The arming lever shall be rotated counterclockwise through an angle of 82 degrees minimum to determine compliance with the requirements of 3.2.1.2.

4.7.3 **Auto return to SAFE (M102).** The arming lever shall be rotated to the ARM ENABLE position and released to automatically return to the SAFE position to determine compliance with the requirements of 3.2.1.1 and 3.2.2.2.

4.7.4 **Function/lever position (M101).** The arming lever shall be rotated from the SAFE position (0 degree location) to the ARM ENABLE position (82 degree, minimum, location) to determine compliance with the requirements of 3.2.2.1 and 3.3.2.1.

4.7.5 **Arming forces (M103).** The arming lever shall be rotated from the SAFE position (0 degree location) to the ARM ENABLE position (82 degree, minimum, location) at least ten times. After the cycling, the forces to rotate the arming lever shall be measured to determine compliance with the requirements of 3.3.1.2.

4.7.6 **Resistance.** The switch shall be subjected to the following tests.

4.7.6.1 **In SAFE condition.** Compliance with the resistance requirements of 3.4.4.2.1 shall be determined in accordance with the following procedures:

a. With the switch in the SAFE position, apply 500 $\pm$ 50 vdc to the lead wire(s) and measure resistance as described below:

(1) Through one lead wire and measure resistance between wire and switch outer housing

(2) Through the other lead wire and measure resistance between wire and switch outer housing

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:29Z
Check the source to verify that this is the current version before use.

(3) Through the two lead wires and measure resistance between the two wires.

4.7.6.2 **In ARM ENABLE condition.** Compliance with the resistance requirements of 3.4.4.2.2 shall be determined in accordance with the following procedures:

a. Place the switch in the ARM ENABLE condition (between 66.5 degrees and the full arm, stop position).

b. Measure the resistance between the two lead wires.

4.7.7 **Leak test.** The switch shall be mounted to a suitable fixture and pressurized to 25 ± 5 psig with dry nitrogen to determine compliance with the requirements of 3.4.3.

4.7.8 **Cycle life.** The switch shall be cycled from the SAFE position (0 degree location) to the ARM ENABLE position (82 degree, minimum, location) and back to SAFE 1000 times. Upon completion of the cycles, the switch shall be subjected to the inspections specified in 4.7.1 through 4.7.6.2 to determine compliance with the requirements of 3.3.3.

4.7.9 **Inspection of packaging.** The packaging and marking shall be inspected to verify conformance to the requirements of section 5.

5. PACKAGING

5.1 **Packaging.** Unless otherwise specified in the contract or order (see 6.2), packaging shall be commercial as specified herein.

5.1.1 **Commercial.** The switches shall be packaged in accordance with standard commercial packaging requirements of ASTM D 3851.

5.2 **Marking.**

5.2.1 **Standard marking.** In addition to any special marking required by the contract or order (see 6.2), interior and exterior containers shall be marked in accordance with MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 **Intended use.** The switch is intended for use in the Standard Missile Mk 104 Dual Thrust Rocket Motor to allow actuation of the arming firing device.

6.2. **Acquisition requirements.** Acquisition documents must specify the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:29Z
Check the source to verify that this is the current version before use.

a. Title, number and date of this specification.

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1, and 2.2).

c. Whether first article is required (see 3.1 and 6.3).

d. Working environment, if other than as specified in 3.12.

e. Packaging if other than as specified in 5.1.

f. Special marking (see 5.2.1).

6.3. First article. When first article inspection is required, the contracting officer should provide specific guidance to offerors on the material to be inspected. The material should be a first article sample and should consist of a quantity of the switches sufficient to perform all of the inspections specified in 4.5. The first article sample should be packaged and marked as specified in section 5. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results, and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.4 Subject term (key word) listing.

Rocket Motor, Dual Thrust, Mk 104
Standard Missile

Preparing activity:
NAVY-OS
(Project 1340-N815)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:29Z
Check the source to verify that this is the current version before use.

1. TRANSITION ZONE. Both the ARM ENABLE and SAFE operation must take place within this zone.
2. Arming lever must rotate freely through an angle of 82° minimum.
3. ARM ENABLE ZONE. The unit must be ARM ENABLE when the arming lever is in this zone.
4. 30.0° minimum SAFE ZONE. Unit must be SAFE when arming lever is in this zone.
5. Requirements shown are for a counterclockwise rotating switch located at the 0° position on the rocket motor.

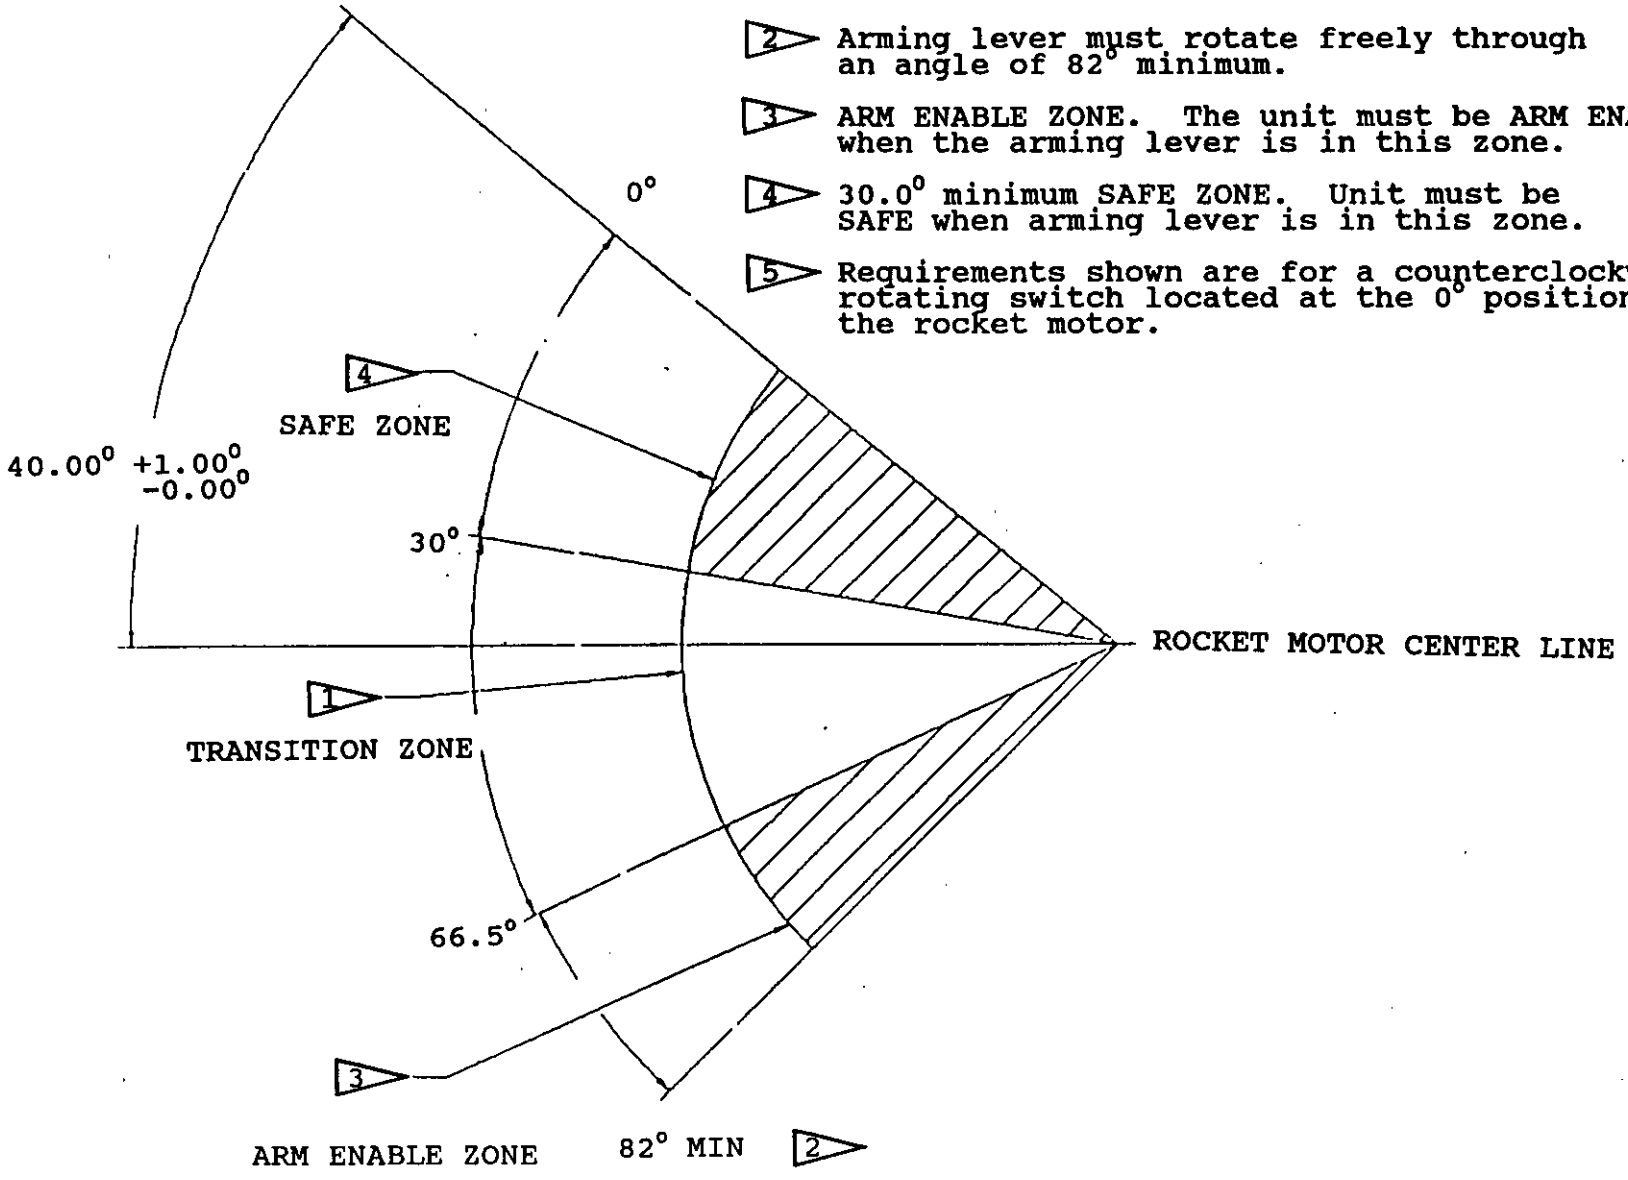


FIGURE 1. Lever position requirements. 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:29Z
Check the source to verify that this is the current version before use.

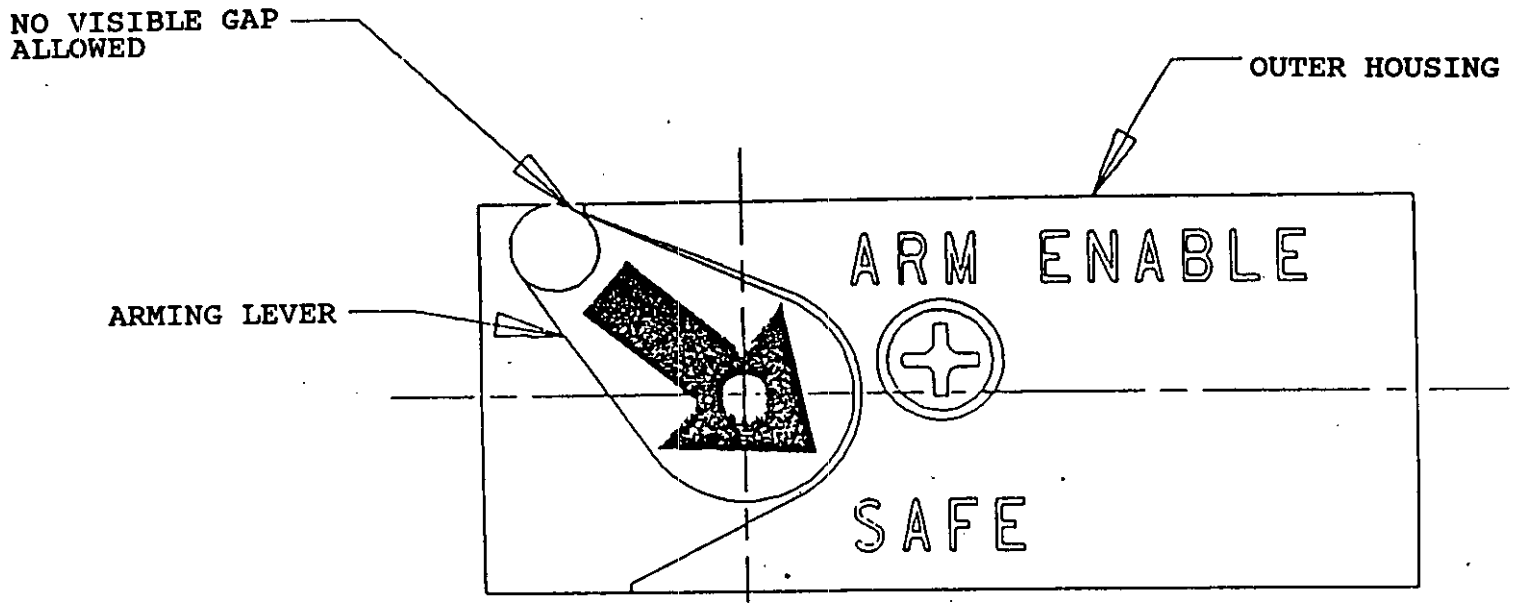


FIGURE 2. Arming lever "no gap" requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:29Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-S-82849	2. DOCUMENT DATE (YYMMDD) 5 February 1990

3. DOCUMENT TITLE
SWITCH, ARM ENABLE, ROCKET MOTOR, MK 104

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE *(Include Area Code)* (1) Commercial (2) AUTOVON *(If applicable)*	7. DATE SUBMITTED *(YYMMDD)*

8. PREPARING ACTIVITY NAVAL ORDNANCE STATION (CODE 3730) INDIAN HEAD, MD 20640-5000

a. NAME	b. TELEPHONE *(Include Area Code)* (1) Commercial (2) AUTOVON
c. ADDRESS *(Include Zip Code)*	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:29Z
Check the source to verify that this is the current version before use.