MIL-S-13001C
25 February 1972
SUPERSEDING
MIL-S-13001B
28 September 1964

MILITARY SPECIFICATION

SIFTING MACHINE, FLOUR, ELECTRIC

(FOR FIELD BAKERIES)

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers a portable gyratory flour sifting machine.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids, or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

W-F-406	-	Fittings for Electrical Cable and Flexible Metal Conduit
CC-M-636	-	Motor, Alternating-Current, (Fractional Horsepower)
HH-C-576	-	Cork Sheet (Gaskets, Sheets, and Strips)
QQ-A-250	-	Aluminum and Aluminum Alloy Plate and Sheet; General Specification For
QQ-A-250/1	-	Aluminum 1100, Plate and Sheet
QQ-A-250/8	-	Aluminum Alloy 5052, Plate and Sheet
QQ-A-601	-	Aluminum Alloy Sand Castings
QQ-L-171	-	Lead Pig
QQ-M-44	-	Magnesium Alloy Plate and Sheet (AZ31B)
QQ-S-630	-	Steel, Bar, Carbon, Hot Rolled (Merchant Quality)
QQ-S-634	-	Steel, Bar, Carbon, Cold Finished, (Standard Quality)
QQ-S-698	-	Steel, Sheet and Strip, Low-Carbon
QQ-W-461	-	Wire, Steel, Carbon (Round, Bare and Coated)
QQ-W-470	-	Wire, Steel, Carbon, Spring, Music

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:56Z
Check the source to verify that this is the current version before use.

RR-C-271 - Chains and Attachments, Welded, Weldless, and Roller Chain
TT-E-529 - Enamel, Alkyd, Semi-Gloss
TT-P-636 - Primer Coating, Alkyd, Wood and Ferrous Metal
PPP-C-650 - Crates, Wood, Open and Covered
PPP-T-60 - Tape: Packaging, Waterproof

MILITARY

MIL-P-116 - Preservation, Methods Of
MIL-W-530 - Webbing, Textile, Cotton, General Purpose, Natural Or in Colors
MIL-R-5674 - Rivets, Aluminum and Aluminum Alloy
MIL-S-7947 - Steel, Sheet and Strip (1095) Aircraft Quality
MIL-C-10578 - Metal Conditioner and Rust Remover (Phosphoric Acid Base)

STANDARDS

FEDERAL

FED-STD-595 - Colors

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-130 - Identification Marking of U.S. Military Property
* MIL-STD-461 - Electromagnetic Interference Characteristics, Requirements For Equipment
* MIL-STD-462 - Electromagnetic Interference Characteristics, Measurement Of

DRAWINGS

ARMY NATICK LABORATORIES

5-11-304 - Sifter, Flour, For Field Bakeries, Assembly and Parts List
5-11-305 - Sections
5-11-306 - Base and Stake, Assembly and Details
5-11-307 - Machine Bed, Assembly and Details

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:56Z
Check the source to verify that this is the current version before use.

5-11-308 - Machine Bed, Details "A"
5-11-309 - Machine Bed, Details "B"
5-11-310 - Lower Bearing Housing, Counter-Balance Sheave and Details
5-11-311 - Hanger Rod and Miscellaneous Details
5-11-312 - Sieve Frame Bed, Assembly
5-11-313 - Sieve Frame Bed, Details "A"
5-11-314 - Sieve Frame Bed, Details "B"
5-11-315 - Sieve Frames
5-11-316 - Sieve Insert Panels
5-11-317 - Hold Down Box
5-11-318 - Cloth Tube and Clamps
5-11-319 - Feed Hopper

(Miniature copies of Drawings 5-11-304 and 5-11-305, identified as figures 1 and 2, are attached for information purposes only.)

(Copies of specifications, standards, and drawings required by the supplier in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

Underwriters' Laboratories, Inc. (UL)

Standard No. 73 - Motor-Operated Appliances

* (Application for copies should be addressed to the Underwriters' Laboratories, Inc., 207 East Ohio St., Chicago, Ill. 60611; 1285 Walt Whitman Road, Melville, Long Island, N.Y. 11746; or 1655 Scott Blvd., Santa Clara, Calif. 95050.)

Baking Industry Sanitation Standard (BISSC)

* Standard No. 1 - Flour Handling Equipment for Bakeries

* (Application for copies should be addressed to the Baking Industry Sanitation Standards Committee, 521 Fifth Avenue, New York, N.Y. 10017.)

National Electrical manufacturers Association (NEMA)

Standard Switches Enclosed KS 1-1957

(Application for copies should be addressed to the National Electrical Manufacturers Association, 155 East 44th Street, New York, N.Y. 10017.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:56Z
Check the source to verify that this is the current version before use.

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, D.C. 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

* 3.1 First article. When specified (see 6.2), the supplier shall furnish a sample for first article inspection and approval (see 4.2 and 6.3).

* 3.2 Code and standards compliance.

* 3.2.1 Underwriters' Laboratories, Inc. (UL). The electrical components utilized in the flour sifter shall conform to the applicable requirements of UL Std. No. 73.

* 3.2.1.1 UL certification. Prior to the approval of the preproduction sample, if one is submitted, or prior to the approval of the first shipment, the supplier shall submit to the contracting officer or his authorized representative satisfactory evidence that all electric components of the flour sifters he proposes to furnish under this specification conform to the applicable standards of UL Std. No. 73. Acceptable evidence of meeting the requirements of UL Std. No. 73 shall be the UL listing mark, or label; or a certified test report from an independent testing laboratory acceptable to the Government indicating that the electrical components of the flour sifter have been tested and conform to all the requirements of UL Std. No. 73.

* 3.2.2 Baking Industry Sanitary Standards (BISSC). The flour sifting machine shall conform to the applicable requirements of BISSC Std. No. 1.

* 3.2.2.1 BISSC certification. The supplier shall submit satisfactory evidence to the contracting officer or his authorized representative that the flour sifting machine he proposes to furnish under this specification conforms to the applicable requirements of BISSC Std. No. 1 as follows:

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:56Z
Check the source to verify that this is the current version before use.

(1) A photostatic copy of the current BISSC certificate of authorization for the flour sifting machine shall be submitted prior to the approval of the preproduction sample, if one is submitted, or prior to the approval of the first shipment; or

(2) A certified test report from a recognized independent testing laboratory acceptable to the medical department of the service for which the flour sifters are being procurred indicating that the flour sifters have been tested and conform to the applicable requirements of BISSC Std. No. 1 shall be submitted prior to the approval of the preproduction sample, if one is submitted, or prior to the approval of the first shipment.

* 3.3. Materials. Materials not definitely specified shall be of the quality normally used by the manufacturer for his sifting machines provided the completed machines comply with all provisions of this specification.

3.3.1 Steel carbon.

* 3.3.1.1 Bar stock. Steel bar stock shall be 1010, 1015, and 1020 conforming to QQ-S-630 or QQ-S-634.

3.3.1.2 Sheet and strip. Steel sheet and strip shall conform to hot rolled commercial quality or cold rolled commercial quality, chemical composition 1009 of QQ-S-698.

3.3.1.3 Spring tempered strip. Spring tempered strip steel shall be 1095 of MIL-S-7947.

3.3.1.4 Spring wire. Steel spring wire used in the hopper door springs shall conform to QQ-W-470.

3.3.1.5 Wire steel. Steel wire number 1015 shall conform to QQ-W-461.

3.3.2 Aluminum.

3.3.2.1 Castings. Aluminum castings shall conform to alloy 195 of QQ-Q-601.

3.3.2.2 Plate and sheet 1100. Aluminum plate and sheet 1100 shall conform to temper H14 of QQ-A-250/1.

3.3.2.3 Sheets 5052. Aluminum sheets and plate 5052 shall conform to temper H32 of QQ-A-250/8.

3.3.2.4 Rivets. Aluminum rivets shall conform to composition 5056 - H32 of MIL-R-5674.

3.3.3 Magnesium plate and sheet. Magnesium plates and sheets shall conform to QQ-M-44.

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:56Z
Check the source to verify that this is the current version before use.

3.3.4 Lead. Lead shall conform to grade B of QQ-L-171.

3.3.5 Tape, textile cotton. Tape for the sieve insert panels shall conform to type I, class 1 of MIL-W-530.

3.3.6 Enameling sheets. Enameling sheets shall be of a grade commercially known as prime ingot iron, with vitreous enameling finish.

3.3.7 Chain safety. Safety chain used with the stake assembly shall conform to type II, class 6 of RR-C-271.

3.3.8 Cork. Cork for the lower bearing housing cover shall conform to HH-C-576.

3.3.9 Conditioner metal. Metal conditioner shall conform to type II of MIL-C-10578.

3.3.10 Primer. Primer shall conform to TT-P-636.

3.3.11 Enamel. Enamel shall conform to TT-E-529. Color shall be olive drab No. X24087 conforming to FED-STD-595.

3.3.12 Bearings. Ball bearings shall be of the sealed type conforming to Sealmaster Ball Bearing No. SC-16 or equal (see 6.4).

3.4 Design and construction. The electric sifting machine shall be a portable gyratory type consisting essentially of a hopper, sifter box sieve, driving motor sifting mechanism and supporting framework constructed in accordance with Drawings 5-11-304 through 5-11-319 and as specified herein. When tested as specified in 4.4.1 and 4.4.2, the sifter shall start, stop, produce sifted flour and operate without evidence of binding, parts failure, parts separation or overheating of bearings.

3.4.1 Electrical.

3.4.1.1 Motor. The electric motor shall conform to type I, class 1a, style B2, continuous duty of CC-M-636, and shall have the following characteristics: single phase 60 hertz, alternating current, 1/4 horsepower, 1140 revolutions per minute for use on a nominal 120 volt power system, 40 degree centigrade ambient temperature, ball bearings and vertical mountings. The motor leads shall be connected for 115 volt operation.

3.4.1.2 Motor starting switch. The motor starting switch shall be as shown on Drawing 5-11-304 and shall be manually operated, single throw, double pole, toggle switch incorporating hand-reset thermal overload protection. The switch shall be housed in a general purpose NEMA 1 enclosure, Standard Switches Enclosed KS-1-1957.

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:56Z
Check the source to verify that this is the current version before use.

3.4.1.3 Power cord, plug fittings.

3.4.1.3.1 Power cord. The power cord shall consist of three No. 12 American Wire Gage (AWG) flexible, stranded, copper conductors, wrapped in a color coded braid, individually insulated with natural or synthetic rubber, cabled together with jute or cotton filler, and surrounded by a jacket of oil-resistant rubber. The cord shall be rated at 600 volts and shall comply with Underwriter Laboratories, Inc. for hard service cord type SO. The power cord shall be not less than 30 feet long, shall be connected to the line side of the switch and shall be terminated with an attachment plug. A shorter length of power cord shall be connected from the load side of the above mentioned switch to the leads of the motor. One of the three conductors shall connect the frame of the motor and machine to ground potential through the plug.

3.4.1.3.2 Plug. The plug shall be a 2-pole, 30-ampere, polarized, male type, equal to and interchangeable with that of polarized Anderson type NEG, catalog C-5498G1 capable of fitting the female polarized Anderson receptacle type NEG, catalog C-5649G2 or equal (see 6.4). The plug shall be furnished complete with rubber cable packing having an opening for the power cord of 0.635 inch, nominal diameter.

3.4.1.3.3 Fittings. The fittings used in connection with the cable shall conform to type I, class 4 of W-F-406.

3.4.1.3.4 Electromagnetic compatibility. When specified (see 6.2), the flour sifter shall be designed and equipped for electromagnetic compatibility in accordance with class IIB of MIL-STD-461 (see 4.4.3).

3.4.2 Welding. When aluminum or other nonferrous metal is welded, welding rod of chemical composition similar to the parts being welded shall be used. Projections and rough edges shall be ground smooth.

3.4.3 Bolted connections. Bolt holes shall be accurately punched or drilled and burrs shall be removed. Rivets shall be driven with pressure tools and shall completely fill the holes.

3.5 Finish. All exposed metal surfaces of the sifting machine shall be cleaned and prepared for finishing with the conditioner specified in 3.3.9, followed by a thorough drying. The surface shall then be given one coat of primer specified in 3.3.10. After primer is dry, it shall be followed by one coat of enamel specified in 3.3.11. Dry film thickness of primer and enamel shall be 1.4 mils minimum.

3.6 Marking for identification. The flour sifting machines shall be marked in accordance with MIL-STD-130. Marking shall be the size and location shown on Drawing 5-11-307.

Source: https://assist.dla.mil -- Downloaded: 20260-17T23:56Z
Check the source to verify that this is the current version before use.

3.6.1 Instruction plate. Each machine shall be provided with the instruction plate as shown on Drawing 5-11-310 adhered on the hopper with an adhesive of the epoxy type. Instruction plate shall contain the following information:

(a) Sifting machine is transported with parts nested.

(b) Remove hopper and check that sieves are in numerical order for operation with sieve No. 1 at bottom, with number in front (opposite motor).

(c) Invert the hopper and place in position on top of the supporting frame. Pegs in the brace attached to the hopper fit into the holes in the cross-bar. Lock the hopper in place by means of the locking device mounted on the supporting framework.

(d) Slip inlet stocking over hopper discharge opening and over sifter inlet. Secure stocking with wire clamps provided.

(e) Remove twelve thumb screws which hold the sifter to the inverted supporting base.

(f) Lift sifter assembly from inverted supporting base. Reverse base and place sifter assembly on top of the base. Replace the twelve thumbscrews.

(g) The sifter shall be fastened to the ground by means of the four stakes provided. These stakes are chained to the supporting base.

(h) Attach three bags at the locations provided, two for flour and one for the overproduct or rejected material.

(i) Plug motor into 120-volt, single-phase, 60 hertz receptacle.

(j) Reverse the above procedures to prepare the sifter for transporting.

3.7 Workmanship. The finished flour sifting machine, electric, shall conform to the quality and grade of product established by this specification.

3.7.1 Fabrication. Steel used shall be free from kinks and sharp bends. Straightening of material prior to fabrication shall be accomplished by methods which shall not harm the materials. Shearing and chipping of metal parts shall be done cleanly and accurately, edges shall be smooth. Material shall be free from sharp burrs, slivers and splinters. Corners shall be square and true. Flame cutting by using a tip suitable for the thickness of the metal may be employed instead of shearing or sawing. Bends of a major character shall be made with controlled means to insure uniformity of size and shape.

3.7.2 Welding and brazing. All surfaces of parts to be welded or brazed shall be clean. Welding and brazing shall be accomplished in a manner which will prevent the occurrence of burn holes, cracks, fractures or incomplete fusion. All scales or flux deposits shall be removed from finished welds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:56Z
Check the source to verify that this is the current version before use.

3.7.3 Threaded fasteners. All bolts, nuts, studs and screws and other threaded fasteners shall be drawn tight.

3.7.4 Riveting. Rivets shall be tight. Drawn heads shall be concentric with holes and in full contact with member riveted.

3.7.5 Electrical assembly. Wiring shall be properly joined, not cut or abraded, not loose at terminal end, properly enclosed in conduit when required, provided with slack and not stripped of required insulation.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 First article inspection. When a preproduction sample is required, it shall be examined for the defects in table I, dimensions specified, and tested as specified in 4.4.1 and 4.4.2, and when applicable, tested as specified in 4.4.3. The presence of any defect listed in table I, or any dimension not within specified requirements, shall be cause for rejection of the preproduction sample. Failure to pass any test shall be cause for rejection of the preproduction sample.

4.3 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.3.2 In-process inspection. Inspection shall be made of the following operations to determine compliance with specified requirements. Whenever nonconformance is noted correction shall be made to the affected items and lot in process.

(a) All exposed metal surfaces shall be cleaned with the conditioner specified in 3.3.9.

(b) Surfaces shall be given an application of primer specified in 3.3.10.

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:56Z
Check the source to verify that this is the currentversion before use.

4.3.3 End item inspection. The inspection lot shall consist of all sifting machines offered for inspection at one time. The sample unit shall be one completely fabricated sifting machine.

4.3.3.1 Visual examination. Examination shall be made of the sifting machine for the defects listed in table I. The inspection level shall be II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE I. Classification of defects

Examine	Defect	Classification Major	Classification Minor
Finish	Type of finish not as specified	X	
	Not finished where required	X	
	Not specified color		X
Design, construction and workmanship general (applicable to all components and assemblies).	Material not free from sharp bends or kinks	X	
	Shearing and chipping not clear or accurate		X
	Edges not smooth		X
	Corners not square or true		X
	Components misplaced, or not in proper alignment	X	
	Surfaces of production zone not easy cleanable, or accessible	X	
	Sharp burr, or edge, silver or splinter	X	
Welding and brazing (where required).	Missing, incomplete, burn holes, cracked, fractured, or not fused	X	
	Slag inclusion, slight undercut, not smooth and uniform or scale or flux deposits not removed		X
Rivets	Missing, or broken, not approved type	X	
	Inadequately peened or loose		X
Bolts, nuts, screws, studs, and other types of threaded fasteners.	Missing, not type specified, loose, broken, stripped or fractured	X	
	Lockwasher missing where required		X

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:56Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Electrical assembly	Wiring cut, not properly joined, loose at terminal or not enclosed in conduit where required	X	
	Adequate slack not provided for wiring to relieve strain or required insulation stripped from wiring	X	
Identification marking	Missing, incomplete, not legible, not specified type or size, not in proper location or incorrect		X
Instruction plate	Missing, incomplete		X
	Not adhered with an epoxy adhesive		X

4.3.3.2 Dimensional and coating thickness. Examination shall be made to determine conformance with dimensional requirements and coating thickness. Any dimension and coating thickness not within specified requirements shall be classified as a defect. The inspection level shall be S-2 with an AQL of 4.0 expressed in terms of defects per hundred units.

4.3.3.3 Testing of the end product. When a preproduction sample is not required, the initial production unit shall be tested as specified in 4.4.1 and 4.4.2, and when applicable in accordance with 4.4.3. Each flour sifter shall be tested as specified in 4.4.1.

4.3.4 Code and standards compliance. Proof of compliance with the requirements of 3.2 and 3.4.1.2 shall be submitted to the Government representative.

* 4.3.5 Examination of preparation for delivery. An examination shall be made to determine that preservation and packaging, packing and marking as required by section 5 of this specification are complied with. Defects shall be as indicated in table II. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-2 with an AQL of 2.5 defects, expressed in terms of defects per hundred units.

TABLE II. Examination of preparation for delivery

Examine	Defect
Markings	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Component missing, damaged, or otherwise defective

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:56Z
Check the source to verify that this is the current version before use.

* 4.3.5.1 Examination of shipping containers. When shipping containers are required to be in accordance with PPP-C-650, examination for defects in waterproofing, anchoring of contents, and closure shall be in accordance with PPP-C-650.

4.4 Tests.

4.4.1 Operational test. Each flour sifting machine shall be connected to power and operated for 30 minutes to determine compliance with 3.4. Nonconformance to specified requirements shall constitute failure of this test.

4.4.2 Functional test. The flour sifting machine shall sift flour (approximately 250 to 300 pounds) for not less than 5 minutes to determine compliance with 3.4. Any nonconformance to specified requirements shall constitute failure of this test.

* 4.4.3 Electromagnetic compatibility test. When electromagnetic compatibility is required the preproduction sample or the initial unit of production shall be tested by the supplier in accordance with test method CE03 and RE02 of MIL-STD-462. The Government reserves the right to witness tests performed by the supplier or an independent testing agency. The supplier shall furnish the contracting officer written certification that the Interference Control Plan, the EMI/EMC Test Plan, and the Electromagnetic Test Report and the requirements meet MIL-STD-461.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.

* 5.1.1.1 Preservation.

5.1.1.1.1 Sealing. The switchbox and the end of the power cable of each sifting machine shall be sealed with tape conforming to PPP-T-60.

5.1.1.1.2 V-Belt. Tension shall be relieved from V-Belt.

5.1.1.2 Packaging. Each sifting machine shall be dissassembled and packaged nested as specified hereinafter.

5.1.1.2.1 Base assembly. The base assembly shall be disassembled from each sifting machine, and placed in an inverted position. The ground stakes shall be placed in the clips provided.

5.1.1.2.2 Sifting machine. The sifting machine shall be placed within the inverted base assembly and secured to the base assembly and secured to the base assembly with the twelve thumbscrews provided.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:56Z
Check the source to verify that this is the current version before use.

5.1.1.2.3 Power cable. The power cable shall be neatly coiled, tied in at least two places with cord or twine and then tied to the base ring.

5.1.1.2.4 Hopper assembly. The hopper assembly shall be disassembled from the sifting machine. The cloth tube and clamps shall be packaged in accordance with method IC-1 of MIL-P-116 and secured to the top of the sifting machine. The hopper assembly shall be inverted and placed over the sifting machine. The hopper assembly shall be secured to the sifting machine to prevent movement while in transit.

* 5.1.2 Level C. Sifting machines shall be preserved and packaged to afford adequate protection against corrosion, deterioration and damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets these requirements.

5.2 Packing. Packing shall be Level A, B, or C as specified (see 6.2).

5.2.1 Level A. Each sifting machine, preserved and packaged as specified in 5.1, shall be packed in a shipping container conforming to type IV of PPP-C-650. Additional floor members shall be used, as required, to support and secure the sifting machine. The sifting machine shall be covered with a full-length shroud in accordance with the appendix of the container specification. The sifting machine shall be blocked by nailing four nominal 2- by 4-inch pieces of lumber to the inside of the four faces of the container and positioned outside of the shroud so that they bear down on the ring of the base assembly. Further anchoring of the contents, as required, shall be in accordance with the appendix of the container specification. There shall be a minimum 1-inch clearance between the top of the hopper and the inside surface of the top of the container.

5.2.2 Level B. Each sifting machine, preserved and packaged as specified in 5.1, shall be packed in a shipping container conforming to type IV of PPP-C-650. Additional floor members shall be used, as required, to support and secure the sifting machine. The sifting machine shall be blocked by nailing four nominal 2- by 4-inch pieces of lumber to the inside of the four faces of the container so that they bear down on the ring of the base assembly. Further securing of the sifting machine, as required, shall be in accordance with container specification. There shall be a minimum 1-inch clearance between the top of the hopper and the inside surface of the top of the container.

* 5.2.3 Level C. Sifting machines, preserved and packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 20261O-17T23:56Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The flour sifting machine covered by this specification is intended for use in mobile field bakeries to aerate and remove foreign substances from flour. The flour sifter has a capacity of 50 to 60 pounds of flour per minute.

* 6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) When a first article is required (see 3.1, 4.2, and 6.3).
(c) When electromagnetic compatibility is required (see 3.4.1.3.4).
(d) Selection of applicable levels of preservation and packaging, and packing (see 5.1 and 5.2).

* 6.3 First article. When a first article is required it shall be inspected and approved under the appropriate provisions of ASPR 7-104.55. The first article should be a preproduction sample. The first article should consist of one unit. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

6.4 Where an item is specified by trade name and is followed by the words "or equal or equivalent" it is intended to indicate a supplier satisfactory to the Government and a quality level that must be met or surpassed by any supplier of an "or equal or equivalent" item. In order to be considered equal or equivalent, a piece or item must be dimensionally interchangeable with the piece or item it is to replace. The Sealmaster Ball Bearing No. SC-16 referenced in 3.3.12 is manufactured by Morse Chain, Division of Borg Warner Corp., Ithica, N.Y. 14850. The electric plug referenced in 3.4.1.3.2 is manufactured by Albert and J.M. Anderson Manufacturing Company, 289 A Street, Boston, Mass. 02127.

6.5 The margins of this specification have been marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) have been made. This has been done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - MC

Preparing activity:

Army - GL

Project No. 7320-0243

Review activity:


Army - MD

User activity:

Army - SM

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:56Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:56Z
Check the source to verify that this is the current version before use.

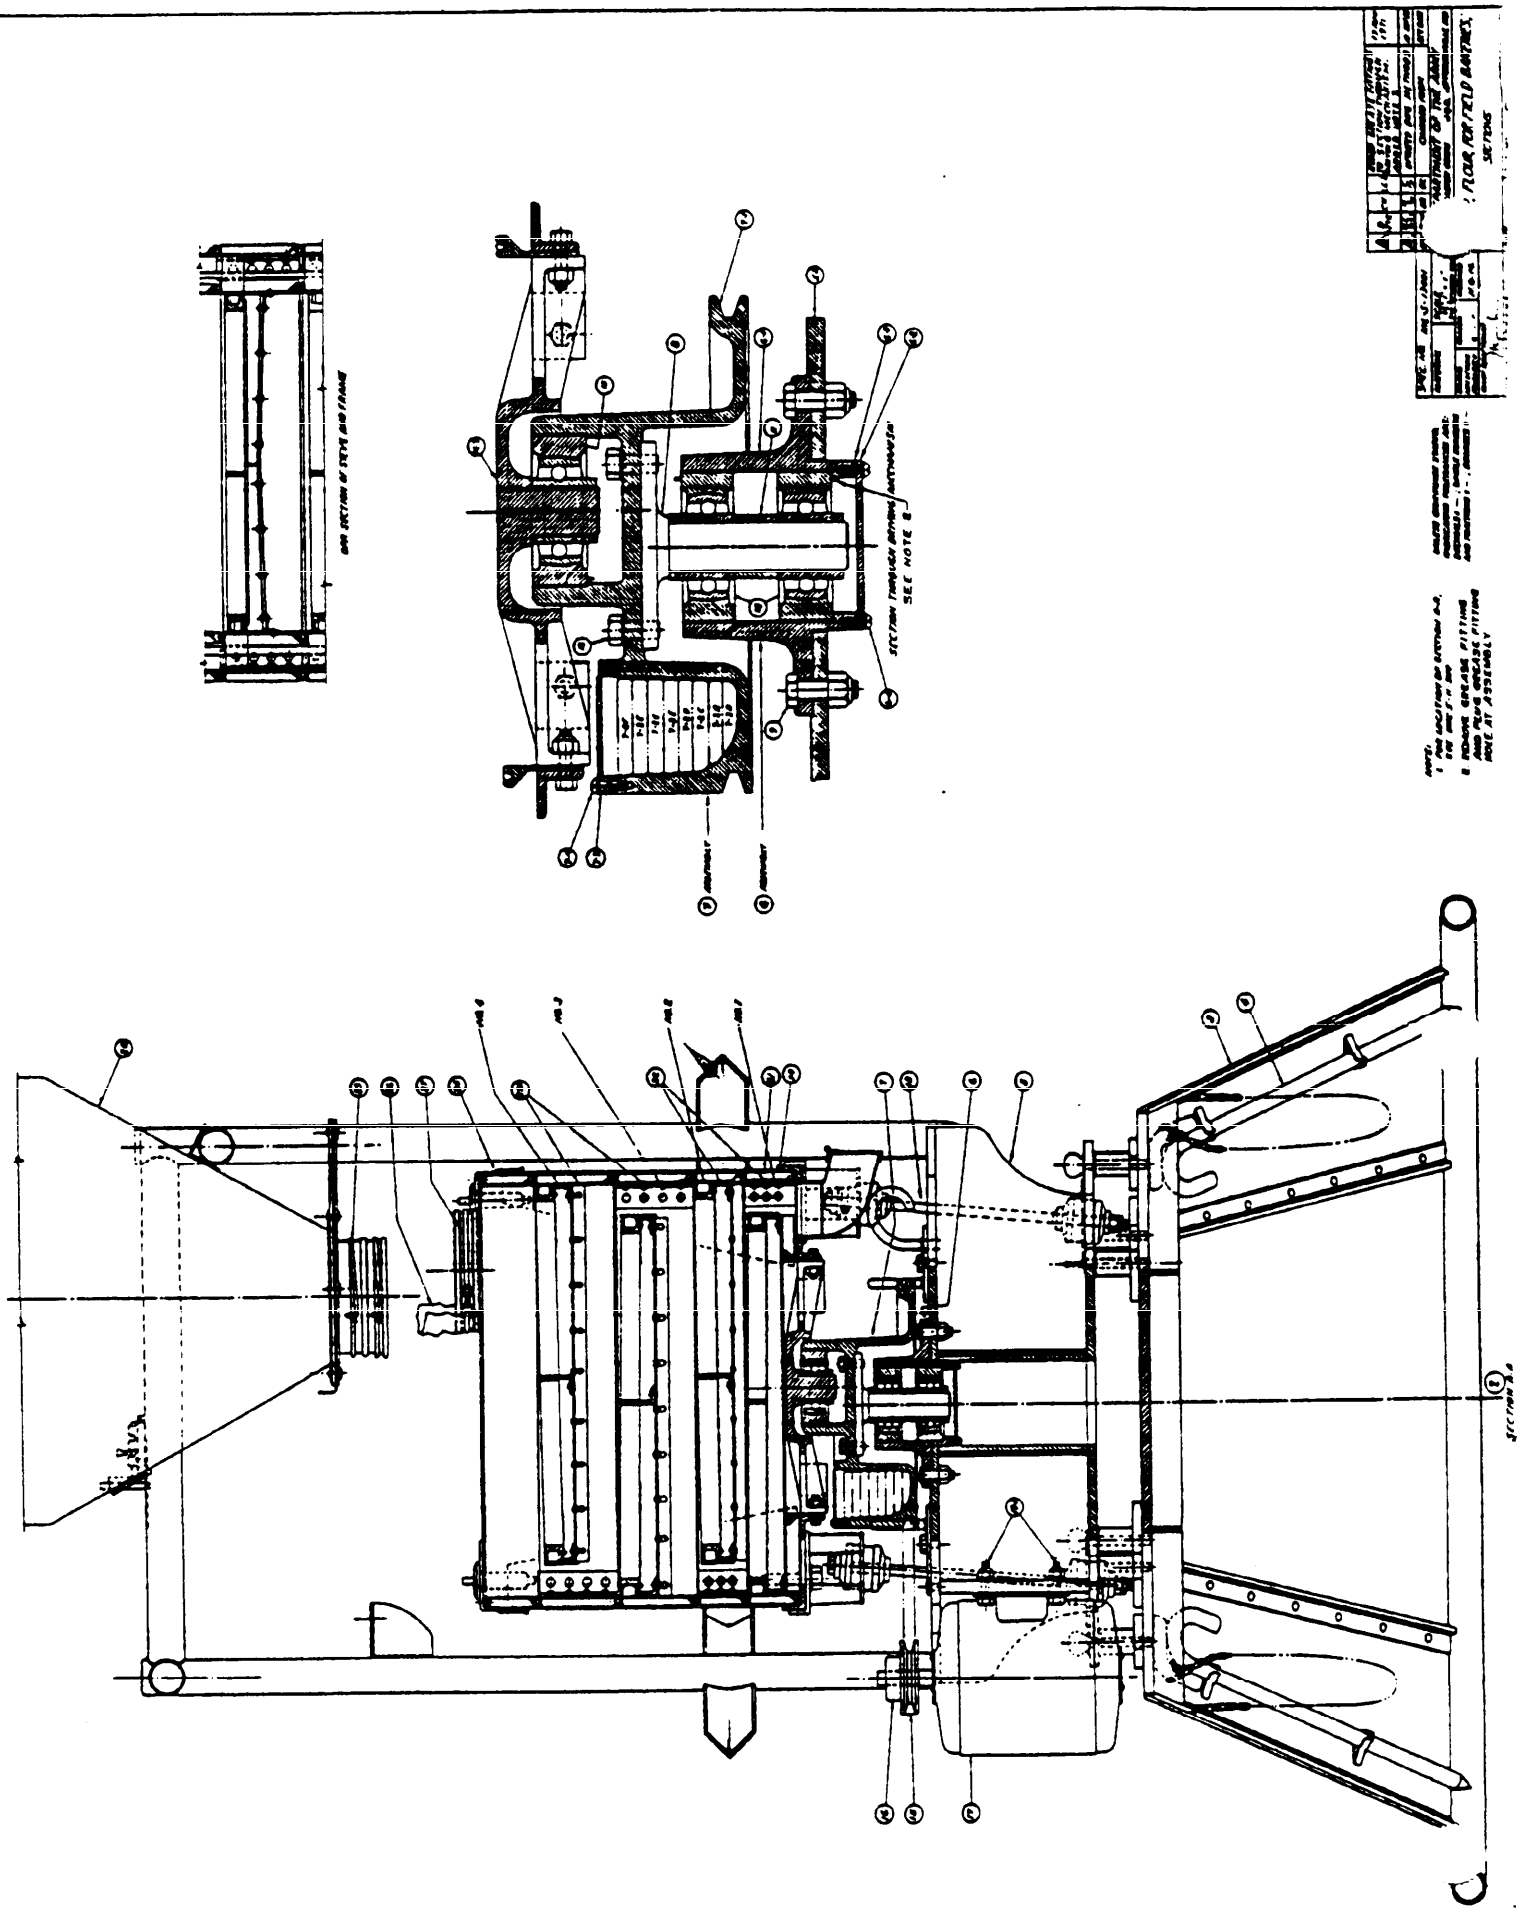

Source: https://assist.dla.mil -- Downloaded: 202610-17T23:56Z
Check the source to verify that this is the currentversion before use.