MILITARY SPECIFICATION

TENT, HATCH TYPE, FIRE, WATER, WEATHER AND MILDEW RESISTANT, OLIVE DRAB

1. SCOPE AND CLASSIFICATION

1.1 Scope.- This specification covers one type of hatch tent for use over vessel hatches.

1.2 Classification.- The tents shall be of the following sizes, as specified (see 6.2):

Size	Width (feet)	Length (feet)	Ridge length (feet)
A	40	36	22
B	30	36	22
C	30	44	30

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

T-T-871	-	Twine, Cotton, Wrapping
T-T-891	-	Twine, Linen
T-T-911	-	Twine, Jute
V-T-285	-	Thread, Polyester
FF-T-276	-	Thimbles, Rope
QQ-S-781	-	Steel, Strapping, Flat

FSC 8340

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:00Z
Check the source to verify that this is the current version before use.

QQ-W-461	-	Wire, Steel, Carbon, (Round, Bare and Coated)
QQ-Z-325	-	Zinc Coating, Electrodeposited, Requirements for
RR-C-271	-	Chains and Attachments, Welded, Weldless, and Roller Chain
RR-W-410	-	Wire Rope and Strand
CCC-C-419	-	Cloth, Duck, Cotton, Unbleached, Plied-Yarns, Army and Numbered
CCC-C-428	-	Cloth, Duck, Cotton; Fire, Water, Weather and Mildew Resistant
CCC-C-429	-	Cloth, Osnaburg, Cotton
CCC-C-467	-	Cloth, Burlap, Jute (or Kenaf)
DDD-L-20	-	Label; for Clothing, Equipage, and Tentage, (General Use)

MILITARY

MIL-E-480	-	Enamel, Baking, Phenol-or Urea-Formaldehyde
MIL-R-1670	-	Rope, Tent-Lay
MIL-L-1709	-	Lines, Tent
MIL-G-16491	-	Grommet, Metallic
MIL-T-40625	-	Tubing, Bias Sewn (Burlap or Osnaburg) Cloth
MIL-W-43061	-	Wax, Machine Stitching

STANDARDS

FEDERAL

FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage

DRAWINGS

ARMY NATICK LABORATORIES

5-4-456	-	Tent, Hatch Type, F.W.W.M.R., O.D., Illustration and Assembly
5-4-457	-	Sections and Hoisting Attachment
5-4-458	-	Enlarged Views "A", "B", "C", and "D"
5-4-459	-	Enlarged Views "E" and "F"
5-4-99	-	Rings, Hand-Worked

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:00Z
Check the source to verify that this is the current version before use.

(Figures 1 through 5 are miniature reproductions of Drawing Nos. 5-4-456, 5-4-457, 5-4-458, 5-4-459 and 5-4-99 and are attached for information only.)

PUBLICATION

Department of the Army Technical Manual TM 10-269; General Repair for Canvas and Webbing

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply:

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 202 Union Station, 516 W. Jackson Blvd., Chicago, Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC.

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Associations, ATTN: Tariff Order Section, 1616 P Street, N.W., Washington, D.C. 20036.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

* 3.1 First article.- This specification contains provisions for first article approval (see 4.2, 6.2 and 6.4).

3.2 Materials and components.-

3.2.1 Cloth, duck, cotton.- The cloth shall be number 8 duck conforming to type I of CCC-C-419.

Source: https://assist.dla.mil -- Downloaded: 202640-18T00:00Z
Check the source to verify that this is the currentversion before use.

3.2.1.1 Color and treatment.- The finished cloth shall conform to type I, class 1 of CCC-C-428.

3.2.2 Rope, tent-lay.- The manila rope shall conform to type I, class 2, 1-1/2 inch circumference and 2-inch circumference of MIL-R-1670.

* 3.2.3 Thread, polyester.- The thread shall conform to type I, class 1, subclass B (except size 5 shall be subclass A) dyed shade S-1 (Cable No. 66022) of V-T-285. The dyed thread shall show fastness to weathering equal to or better than the standard shade sample (see 6.3). If no standard shade sample is available, the dyed thread shall show good fastness to weathering. Thread sizes shall be as follows:

For all stitching except machine stitching of rope and machine serving of rope and stitching indicated by "Z" on drawings	- Size FF for needle and bobbin
For stitching of ropes to tents	- Size 3 for needle and bobbin
For machine serving of ropes and machine stitching of ropes	- Size 5 for needle and bobbin
For stitching indicated by "Z" on drawings	- Size FF for needle, size F for looper

* 3.2.4 Wax, stitching.- The stitching wax shall conform to MIL-W-43061 and shall be golden in color.

3.2.5 Twine, linen.- The twine shall be 5-ply conforming to type II of T-T-891.

* 3.2.6 Grommets, metallic.- The grommets shall conform to type VIII, class 4B, size no. 6 of MIL-G-16491, except that the zinc coating on the steel or malleable iron rings shall be in accordance with type III, class 3 of QQ-Z-325, after which a coating of black enamel conforming to type I or II of MIL-E-480 shall be applied. When rings are made of steel wire, they shall conform to steel, finish 5, class 2, number 1010 to 1020 of QQ-W-461.

* 3.2.7 Hoisting attachment.- The hoisting attachment shall be fabricated from welding quality structural steel and shall be of the design shown on Drawing 5-4-457. The welding shall have a proof load of 4,000 pounds. The roller shall be machine finished, case hardened Rc 40-48, .020 inch in depth and shall rotate after the attachment has been given an electrodeposited zinc coating in accordance with type III, class 1 of QQ-Z-325, followed by a coating of black enamel conforming to type II of MIL-E-480.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:00Z
Check the source to verify that this is the current version before use.

* 3.2.8 Rings, steel.- The rings shall be type VI sizes 1/2 inch by 3 inches and 1/2 inch by 4 inches conforming to RR-C-271. The rings shall be zinc coated in accordance with type III, class 2 of QQ-Z-325 and then coated with black enamel conforming to type I or II of MIL-E-480.

3.2.9 Wire rope.- The wire rope shall be made of improved plow steel, non-preformed, fiber core, galvanized, 1/2 inch diameter conforming to type III, class 2 of RR-W-410.

* 3.2.10 Thimble, rope.- The thimbles shall conform to type II, thimble sizes 1/2-inch and 5/8-inch of FF-T-276, except that after zinc coating as specified therein the thimbles shall be coated with black enamel conforming to type II of MIL-E-480.

* 3.2.11 Wire, steel.- The wire shall be 0.0625 inch nominal diameter and conform to the requirements for steel number 1010, soft, finish 5, class 3 of QQ-W-461.

3.3 Construction.- The construction shall conform to the drawings listed in section 2 as specified herein.

3.3.1 Stitching machine.-

3.3.1.1 Types of stitching.- Stitching shall conform to FED-STD-751 as follows:

For all stitching except machine stitching and machine serving of rope, and stitching indicated by "Z" on drawings	-	Type 301, 5 to 7 stitches per inch
For machine serving and machine stitching of ropes	-	Type 301, 3 to 5 stitches per inch
For stitching indicated by "Z" on drawings	-	Type 401, 5 to 7 stitches per inch. Chain portion of stitching shall not appear on outside of tent

3.3.1.2 Thread breaks.- Thread breaks in stitching shall be overstitched not less than 1-inch at each break on stitch type 301; not less than 1-1/2 inches at each break on stitch type 401.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:00Z
Check the source to verify that this is the current version before use.

3.3.1.3 Stitching ends.- Stitching ends shall be overstitched not less than 1 inch on stitch type 301, except where ends are turned under in a hem, are held down by other stitching, or where stitching is performed automatically.

* 3.3.1.4 Skipped stitches.- Two or more consecutively skipped stitches occurring in type 301 stitching shall be overstitched not less than 1 inch. Any skipped stitches in type 401 stitching shall be overstitched not less than 1-1/2 inches. Skipped stitches in type 401 stitching may be overstitched with type 301 stitching.

3.3.1.5 The addition of any lubricant to the polyester sewing thread prior to or during sewing operation is prohibited, except where otherwise specified (see 3.3.3).

* 3.3.2 Hand stitching.- All hand stitching shall be done with the twine specified in 3.2.5 using four strands twisted together. Each stitch shall be pulled tight and all ends of stitching secured. Hand stitching of rope reinforcements shall be stitched to canvas through each lay of rope and fullness of 1/4 inch, minimum of canvas shall be allowed for each foot of rope.

3.3.3 Machine stitching of rope.- Machine stitching of rope to the cloth with the size 5 thread specified in 3.2.3 shall be done on a machine capable of using hot stitching wax specified in 3.2.4.

3.3.4 Rings, handworked.- The handworked rings shall be made as illustrated on Drawing 5-4-99. Handstitching shall be done with the twine specified in 3.2.5 using two strands twisted together. Each stitch shall be pulled tight and all ends of stitching secured.

3.3.5 Serving of end ropes.- The free ends of the manila ropes shall be served in accordance with methods shown on Drawing 5-4-458.

3.3.6 Splicing of rope.- Splicing shall be done in a tight and workmanlike manner. After splice has been completed, all ends of strands shall be clipped to a length of not less than 1-inch nor more than 1-1/4 inches.

3.3.6.1 Sailmaker's splice.- The sailmaker's splice shall consist of four tucks, the first two tucks with all three strands of rope, the third tuck with two strands, and the fourth with one strand, giving a tapered effect.

3.3.7 Wire rope thimble-eye splice.- The wire rope thimble-eye splice shall have three full strand tucks and two half strand tucks. The splice shall be hammered smooth and served over its entire length with wire specified in 3.2.11. The end of the serving wire shall be secured.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:00Z
Check the source to verify that this is the current version before use.

3.3.8 Repairs.- Repairs whenever necessary and when authorized by the contracting officer shall be effected in accordance with Department of the Army Technical Manual TM 10-269 except that handsewn or glued patches will not be acceptable.

3.3.9 Welding.- All welding shall be as specified on drawings. Materials to be welded shall be clean and free of scale, corrosion, oil, water and other matter. Welding shall be sound and smooth, free from porosity, cracks, incomplete fusion and deformation of material.

* 3.4 Marking.- Marking and labels shall conform to DDD-L-20 and shall be applied as indicated on Drawing 5-4-456.

* 3.4.1 Special marking.- The item nomenclature and the letters "US" shall conform to type IV, class 9 and shall be clearly legible after subjection to accelerated weathering.

* 3.4.2 Identification label.- The identification label shall conform to type II, class 6. The size of the label shall be 3-1/2 inches by 5-1/2 inches with a blank space of at least 1-1/4 inches at the bottom of the label for the Department of Defense inspector's stamp.

* 3.5 Workmanship.- Cloth components shall be clean and free of holes, cuts, tears or cloth defects such as smashes, weak places, broken or missing yarns. Thread tension shall be maintained so that there will be no loose stitching and seam allowances shall be maintained with seams properly sewed so that no runoffs, twists, pleats, or open seams shall result. Care shall be taken to insure that no needle chews occur. All thread ends shall be trimmed to 1/2 inch or less. Metal components shall be free of burrs, sharp edges, corroded areas and shall not be broken or malformed.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:00Z
Check the source to verify that this is the current version before use.

* 4.2 First article inspection.- When a preproduction sample is required, it shall be examined for the defects listed in tables II and III. Any visual defect or any dimension not within specified requirements shall be cause for rejection of the preproduction sample.

4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

* 4.3.1.1 Testing of components.- In addition to the quality assurance provisions of the subsidiary specifications and drawings, tests shall be performed on components listed in table I for the characteristics shown. The sample unit shall be one hoisting attachment or roller, as applicable. Requirements shall be applicable to the individual unit. The inspection level shall be S-1 and the acceptable quality level (AQL) shall be 6.5 expressed in terms of defects per hundred units. The inspection lot shall consist of all hoisting attachments or rollers, as applicable, offered for inspection at one time.

TABLE I.- Component tests

Component	Characteristics	Requirement paragraph	Test method
Hoisting attachment	Welding (proof load)	3.2.7	Commercial
Roller	Degree of hardness	3.2.7	Commercial
Roller	Depth of hardness	3.2.7	Commercial

4.3.2 Process inspection.- Inspection shall be made to determine that the following are as specified.

a. Holes punched to receive grommets are in compliance with Drawing 5-4-99.
b. There shall be no lubrication of polyester thread prior to or during sewing operations for compliance with 3.3.1.5.

Whenever nonconformance is noted, correction shall be made to the items affected and to the process.

Source: https://assist.dla.mil -- Downloaded: 202610-18T00:00Z
Check the source to verify that this is the current version before use.

4.3.3 End product inspection.- Inspection shall be made of the completely fabricated end product for the defects as classified in tables II and III. The inspection levels and AQL's shall be as specified in 4.3.3.3. A lot shall consist of all completely fabricated tents offered for inspection at one time. The sample unit shall be one completely fabricated tent.

* 4.3.3.1 Visual examination.- Examination shall be made for defects classified in table II.

TABLE II.- Classification of defects for visual characteristics

Examine	Defect	Classification Major	Minor A	Minor B
Fabric	Hole, (except drill hole) cut, or tear	X		
	Exposed drill hole			X
	Broken or missing yarn, multiple floats clearly visible at normal inspection distance	X		
	Shade bar			X
	Fine or coarse filling bar	X		
Hardware	Broken	X		
	Malformed:			
	- fails to perform intended function	X		
	- but will perform intended function		X	
	Any burr or sharp edge which may cause injury in handling or damage to fabric	X		
	Protective finish omitted		X	
Hoisting attachment	Roller fails to rotate freely		X	
	Welds showing porosity, entrapped slag, overlap, undercut, non-fusion or cracks	X		
Thimbles	Any thimble not reclinched in a closed position after encircling the steel rings or hoisting attachment		X	
	Size or type not as specified	X		
Steel rings: 3 and 4 inches	Wrong size used, i.e., 3-inch ring used on corners where 4-inch ring is specified or 4-inch ring used on corners where 3-inch ring is specified		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:00Z
Check the source to verify that this is the current version before use.

TABLE II.- Classification of defects for visual characteristics (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Handworked rings with eyelet grommet	Grommets used in lieu of handworked rings and eyelet grommets	X		
	Handworked rings set to inside of tent or eyelet grommet set from outside of tent		X	
	Eyelet grommet in rings split or set excessively tight, cutting handstitchings	X		
	Number of handstitches attaching rings:			
	- less than 20, but not less than 18			X
	- less than 18		X	
	Stitches not tightly pulled, or ends of twine not secured under handstitching; done with less than four strands of linen twine or with twine not thoroughly twisted	X		
Rope components	Any cut; any break	X		
	One half inch diameter rope used where 5/8 inch rope is required	X		
	Any splice (except on lashing ropes) not 4-tuck sailmaker's splice; any lashing rope spliced through thimble or rings with less than 4 tucks eye splice			X
	Any sailmaker's splice not snugly spliced around thimble, allowing thimble to disengage itself from splice	X		
	Free ends not finished as specified			X
	Any reinforcement rope sewn on outside of tent in lieu of inside	X		
Seams and stitching	Open seam on stitch type 301:			
	- for more than 1/4 inch but not more than 1 inch			X
	- for more than 1 inch		X	

Source: https://assist.dla.mil -- Downloaded: 202610-18T00:00Z
Check the source to verify that this is the current version before use.

TABLE II.- Classification of defects for visual characteristics (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)	Open seam on stitch type 401:			
	- one row of stitching open for more than 1/4 inch but not more than 1 inch			X
	- one row of stitching open for more than 1 inch		X	
	- both rows open for more than 1/4 inch (not necessarily at the same location)	X		
	Note: A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more consecutive skipped stitches or run-offs occur. On double-stitched seams, a seam shall be considered open when either one or both sides of a seam are open.			
	Raw edges caught in stitching (except on seams joining main sections on inside of tent):			
	- for more than 1 inch but not more than 3 inches			X
	- for more than 3 inches		X	
	Thread breaks:			
	- overstitched less than 1-1/2 inches on stitch type 401			X
	- overstitched less than 1 inch on stitch type 301			X
	Note: Thread breaks not overstitched shall be classified as open seams			
	Needle chews resulting in hole, cut or tear	X		
Stitching ends	Overstitched less than 1 inch on stitch type 301 (except where ends are held down by other stitching, turned under in a hem, or where stitching is performed automatically)		X	

Source: https://assist.dla.mil -- Downloaded: 202610-18T00:00Z
Check the source to verify that this is the current version before use.

TABLE II.- Classification of defects for visual characteristics (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Seam type	Wrong seam type	X		
Stitch type	Wrong stitch type	X		
Stitch tension	Loose, resulting in a loosely exposed bobbin or top thread for more than 6 inches			X
	Tight, resulting in excessive puckering of fabric on seams for more than 6 inches		X	
Stitches per inch	One stitch less than minimum specified			X
	Two or more stitches less than minimum specified		X	
	One or more stitches in excess of maximum specified			X
	Note: Variation in the number of stitches per inch, caused by the operator speeding up the machine and pulling the fabric in order to sew over heavy places or heavy seams or in turning corners, shall be classified as follows:			
	a. Within the minor "B" defect classification - no defect			
	b. Within the minor "A" defect classification - minor "B" defect			
Stitching gage	Not as specified		X	

Source: https://assist.dla.mil -- Downloaded: 202610-18T00:00Z
Check the source to verify that this is the current version before use.

TABLE II.- Classification of defects for visual characteristics (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Stitching margin	Less than specified by more than 3/16 inch:			
	- for more than 2 inches but not more than 4 inches in length			X
	- for more than 4 inches in length		X	
Stitching indicated by "Z" on drawings	Chain portion of stitching shows on outside of tent		X	
Handstitching of reinforcing rope	Any handstitching done with less than 4 strands of linen twine; ends of stitching not secured; not stitched to canvas through each lay of rope	X		
	Sailmaker's splices not cross-handstitched to seams the full length of the splice; handstitching not extending beyond end of last tuck		X	
	Reinforcement ropes at location of steel rings not handstitched along thimbles and seized off with less than 4 handstitches; reinforcement ropes at location of hoisting attachment not handstitched along thimble and seized off to throat rope with less than 4 handstitches	X		
Construction and workmanship				
Components and assembly	Any component part not fabricated of applicable referenced material	X		
	Any required component or operation omitted (unless otherwise specified herein)	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:00Z
Check the source to verify that this is the current version before use.

TABLE II.- Classification of defects for visual characteristics (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Construction and workmanship (cont'd)				
Mends, darns or patches	Repairs not in accordance with Department of the Army Technical Manual TM 10-269 or not authorized by the contracting officer	X		
Seams	Pleated			X
Hems	Constructed with partial turnunder when double turnunder is required		X	
	Twisted or pleated			X
Reinforcement	Improperly applied, causing excessive fullness on reinforcements or reinforced parts			X
	Not stitched to reinforced parts on all sides or not caught in seams or stitching of reinforced parts		X	
Fullness of canvas	Omitted along rope reinforced sections of tent, causing strain on canvas in lieu of rope (see Note 2 of Dwg 5-4-456 for machine stitching and para. 3.3.2 for handstitching)	X		
Split ridge	Wire rope fastened to ridge with a single turn of steel wire around handworked rings; steel wire not threaded through wire rope as specified		X	
	Splices on wire rope not served with steel wire over entire length of splice; ends of serving wire exposed or not secured	X		
	Ridge reinforcements not inserted in ridge hems as specified, failing to reinforce handworked rings	X		
	Ends of steel wire on handworked rings not flattened smooth	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:00Z
Check the source to verify that this is the current version before use.

TABLE II.- Classification of defects for visual characteristics (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Body, inside	Seams joining main sections not folded as specified or not stitched, folded, and restitched (exclusive of rope stitching)	X		
	Intermediate rope seams not formed as specified, or not stitched prior to stitching rope reinforcement	X		
	Any handstitching at thimble or bridle splices (except wire rope) omitted	X		
	Bridle spliced to wrong reinforcement rope	X		
	Any part of bottom hem not reinforced with 1/2 inch rope; eyes around thimbles not cross-stitched to hem reinforcement rope, or handstitched with a single cross-stitch		X	
Bottom hem	Any thimble along bottom hem (except at 4 inch rings) not extending beyond bottom edge, failing to allow clearance for splice of lashing ropes			X
Body, outside	Not extending to outside of tent	X		
Bridle ropes	Slits through which bridle is passed from inside to outside of tent not closed by handstitching		X	
	Slack on bridle omitted			X
Cleanness	Noticeable grease or oil stains; thread ends not trimmed to 1/2 inch or less		X	
Markings	Omitted, incorrect, illegible or misplaced or size characters not as specified			X

4.3.3.2 Dimensional examination.- Dimensional examination of the completely fabricated tent shall be made for defects in table III.

Source: https://assist.dla.mil -- Downloaded: 202610-18T00:00Z
Check the source to verify that this is the currentversion before use.

TABLE III.- Classification of defects for dimensional characteristics

Examine	Defect	Classification Major	Minor A	Minor B
Overall dimensions	Smaller than specified dimensions less applicable minus tolerance indicated on drawings	X		
	Larger than specified dimensions and applicable plus tolerance indicated on drawings			X
Component dimensions:				
Reinforcements	Finished dimension less than specified by more than 1/2 inch			X
Rope components	Lashing ropes finished less than 24 feet, 6 inches long			X
Hems	Less than specified width by more than 1/4 inch			X
Split ridge	Any handworked ring set unequally spaced by more than 1 inch	X		
Body, inside	Handstitching on bridle splices extending less than 11 inches on either side of slits		X	
Handworked rings on rim	Not centered between thimbles by more than 2 inches			X
Bridle ropes	Distance between bridle slits less than 9 feet, 10 inches or more than 10 feet, 2 inches			X
Location dimensions (unless otherwise specified)	Not within the specified tolerance, but not exceeding twice the applicable tolerance			X
	- exceeding twice the applicable tolerance		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:00Z
Check the source to verify that this is the current version before use.

4.3.3.3 Inspection levels and AQL's.- The inspection levels and AQL's, expressed in terms of defects per hundred units, shall be as follows:

Examination	Inspection level	AQL's
For defects applicable to table II	II	40.0 Major
		150.0 Major and minor A defects combined
		250.0 Totals, major, minor A and B defects combined
For defects applicable to table III	S-3	2.5 Major
		15.0 Major and minor A defects combined
		40.0 Totals, major, minor A and B defects combined

4.3.4 Examination of preparation for delivery requirements.- An examination shall be made to determine that packaging, packing and marking requirements are in compliance with section 5 of this specification. Defects shall be scored in accordance with table IV. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of shipping containers offered for inspection at one time. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Source: https://assist.dla.mil -- Downloaded: 202610-18T00:00Z
Check the source to verify that this is the current version before use.

TABLE IV.- Examination of preparation for delivery

Examine	Defect
Marking	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing. Any component damaged.
Workmanship	Inadequate application of components, such as, incomplete closure of cloth covered bundles or bundles insecurely sewn; steel strapping insecurely fastened.

* 4.3.5 Examination of shipping containers.- When shipping containers are required to be in accordance with PPP-B-601, examination for defects in closure and strapping shall be in accordance with the appendix of that specification.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

* 5.1.1 Level A.- Each hatch tent shall be spread out flat, inside facing up. All lashing ropes shall be formed into self-secured coils. All ends of wire used to secure wire rope to ridge shall be protected to prevent damage to the fabric when bundled. The tent shall be folded in half by aligning the split ridge and the outer edges of the tent. The tent then shall be folded at right angles to the split ridge so as to form a rectangle approximately 22 by 32 feet for size A; 22 by 29 feet for size B; and 30 by 29 feet for size C. The tent then shall be folded into a compact bundle approximately 6 feet in length by 3 feet in width. Before or during the folding operations, all the coiled ropes shall be placed inside the folds.

5.1.2 Level C.- Hatch tents shall be packaged to afford adequate protection against deterioration and damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets these requirements.

* 5.2 Packing.- Packing shall be level A, B, or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202610-18T00:00Z
Check the source to verify that this is the current version before use.

* 5.2.1 Level A.- One tent packaged as specified in 5.1, shall be packed in a snug-fitting wood cleated plywood shipping container conforming to overseas type, style A of PPP-B-601. Each container shall be provided with skids fabricated as specified in the container specification. Each shipping container shall be closed and reinforced with steel strapping in accordance with the appendix of the container specification.

* 5.2.2 Level B.- One hatch tent, packaged as specified in 5.1, shall be wrapped and sewn in cotton onsnaburg cloth conforming to class 2 of CCC-C-429; or burlap cloth conforming to class 3 of CCC-C-467. The cloth wrapping shall be securely hand sewn with type I or II, 16-ply cotton twine conforming to T-T-871 or type I, size no. 2 jute twine conforming to T-T-911, with approximately one stitch to the inch and every third stitch knotted. Alternatively, the bottom and side may be machine-sewn. A minimum of five inches of wrapping material shall be gathered together on each of the four corners and securely hand-sewn into ears for handles. In lieu of the sewn wrapping indicated above, bias-sewn tubing (or bag presewn one end) conforming to MIL-T-40625 may be used. One end of the tubing may be machine-sewn. The formation of handles shall be effected by hand sewing with the same method as specified above. Wherever machine sewing is used, the thread type, stitch type and number of stitches per inch shall conform to the requirements specified in MIL-T-40625. Each bundle shall be strapped with four flat steel straps 3/4 inch by 0.023 inch conforming to type I, class B of QQ-S-781. The strapping shall be applied girthwise with one strap placed 18 inches from each end and the other two straps spaced equal distance between.

* 5.2.3 Level C.- Hatch tents, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with the Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking.- In addition to any special marking required by the contract or order, cloth covered bundles shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The tent is used over vessel hatches to protect cargo, winchman, and hatch tenders while loading and unloading during adverse weather conditions.

* 6.2 Ordering data.- Procurement documents should specify the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:00Z
Check the source to verify that this is the current version before use.

(a) Title, number and date of this specification.
(b) Size required.
(c) First article (see 3.1, 4.2 and 6.4).
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 For access to a standard shade sample of thread, address the procuring office issuing the invitation for bids.

* 6.4 First article.- The item covered by this specification requires first article approval under appropriate provisions of paragraph 7-104.55 of the Armed Services Procurement Regulations. The first article should be a preproduction sample and should consist of one unit. The contracting officer should include specific instructions, in all procurement instruments, regarding arrangements for examination and approval of the first article.

6.5 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:

Army - GL

Review activity:


Army - ME

Preparing activity:

Army - GL

Project No. 8340-A190

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:00Z
Check the source to verify that this is the current version before use.

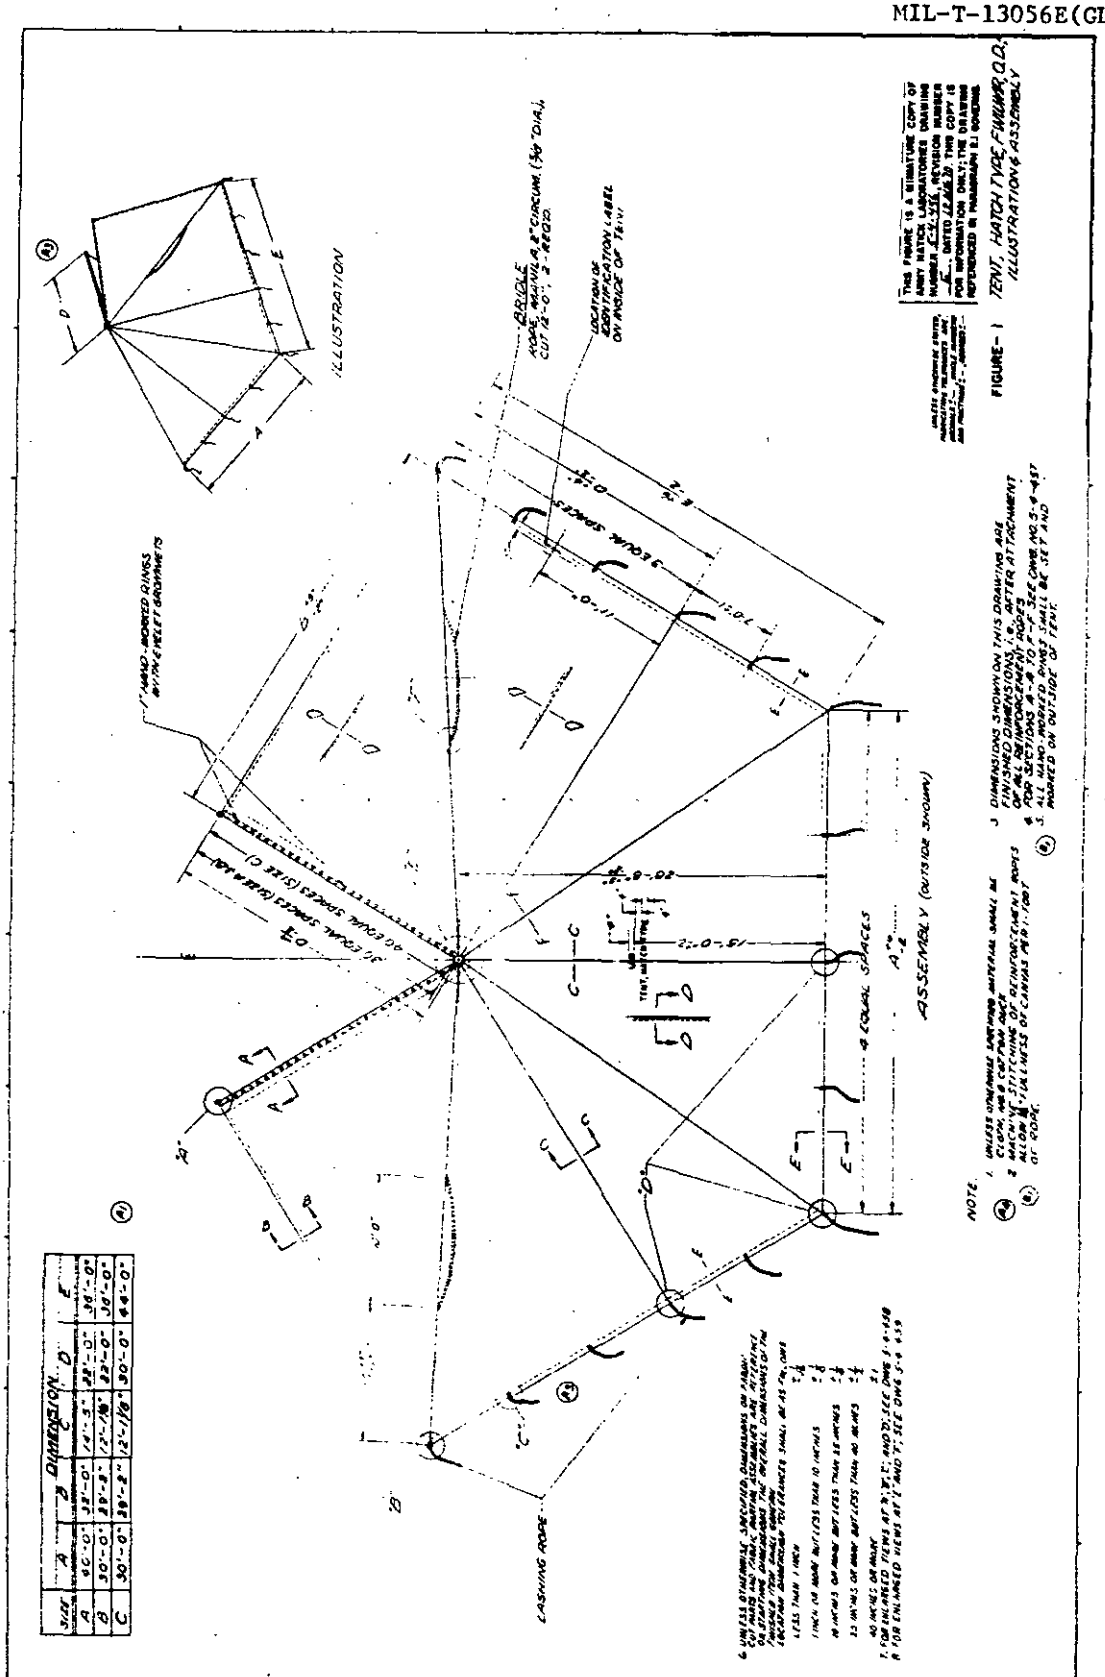

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:00Z
Check the source to verify that this is the current version before use.


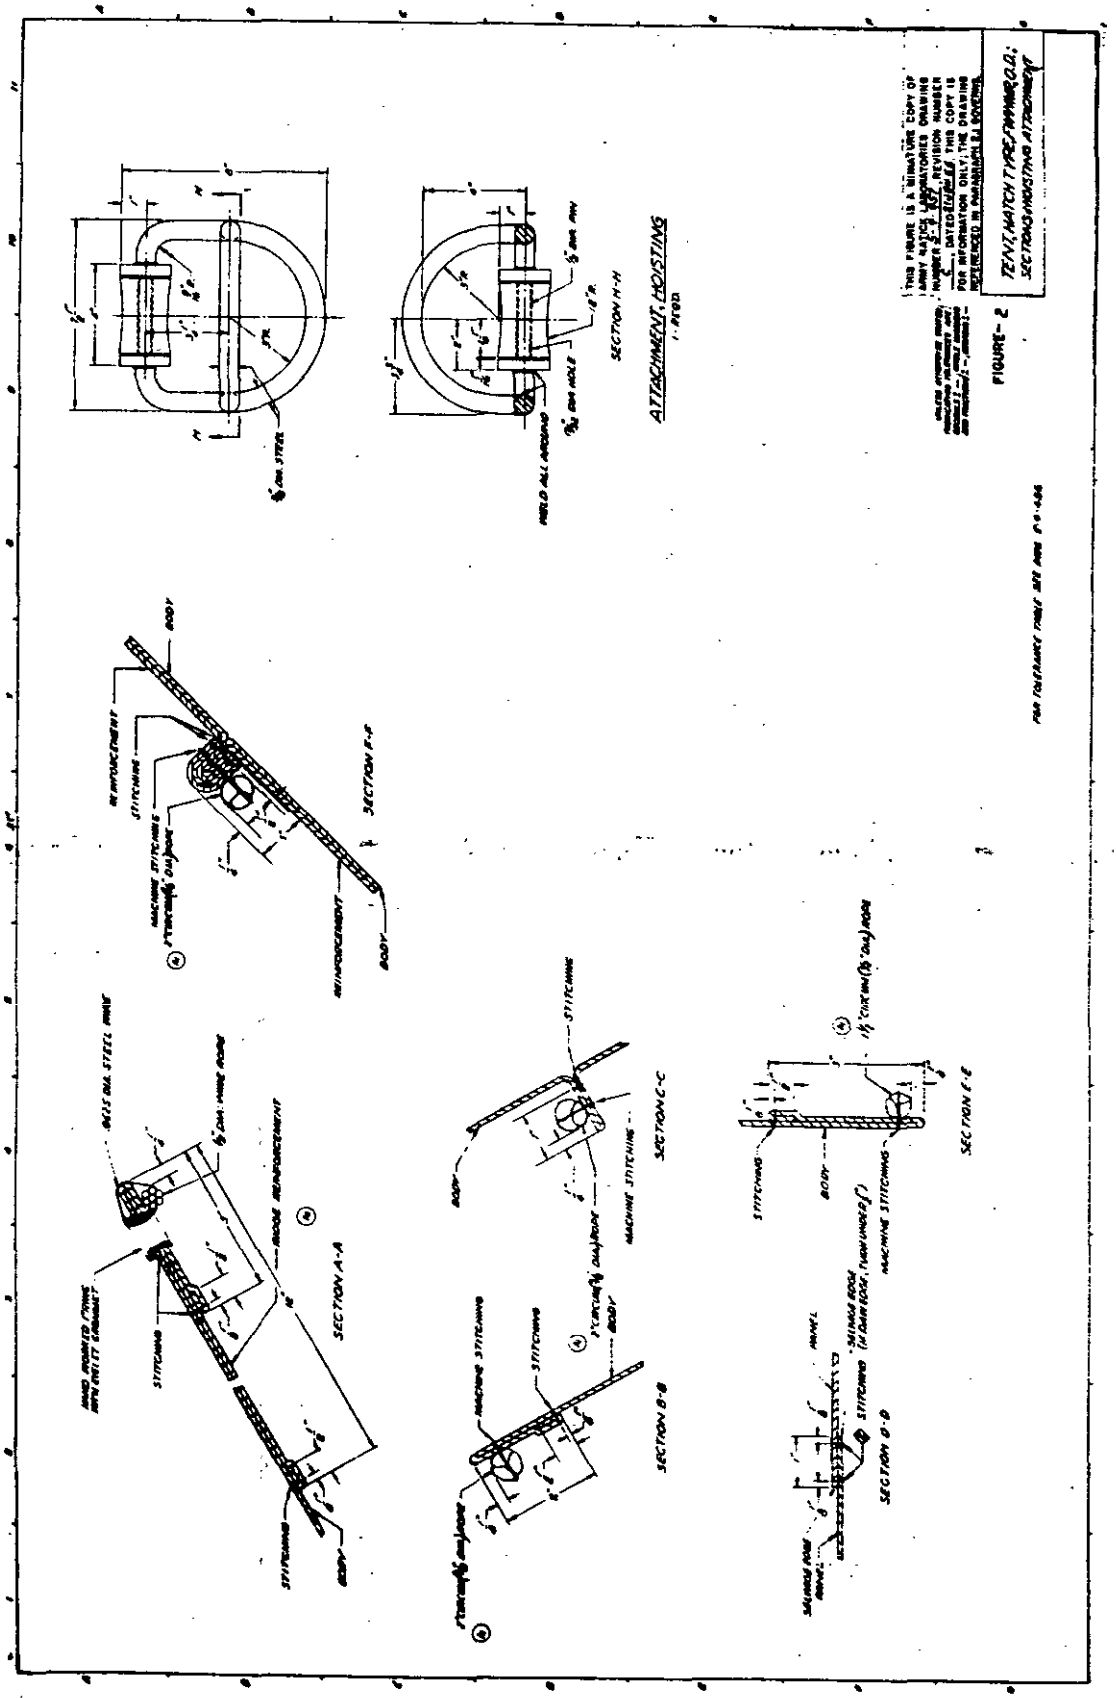


FIGURE 2. TENT, HATCH TYPE (M44 & G.P.) SECTIONS SHOWING ATTACHMENT

Source: https://assist.dla.mil -- Downloaded: 202610-18T00:00Z
Check the source to verify that this is the current version before use.

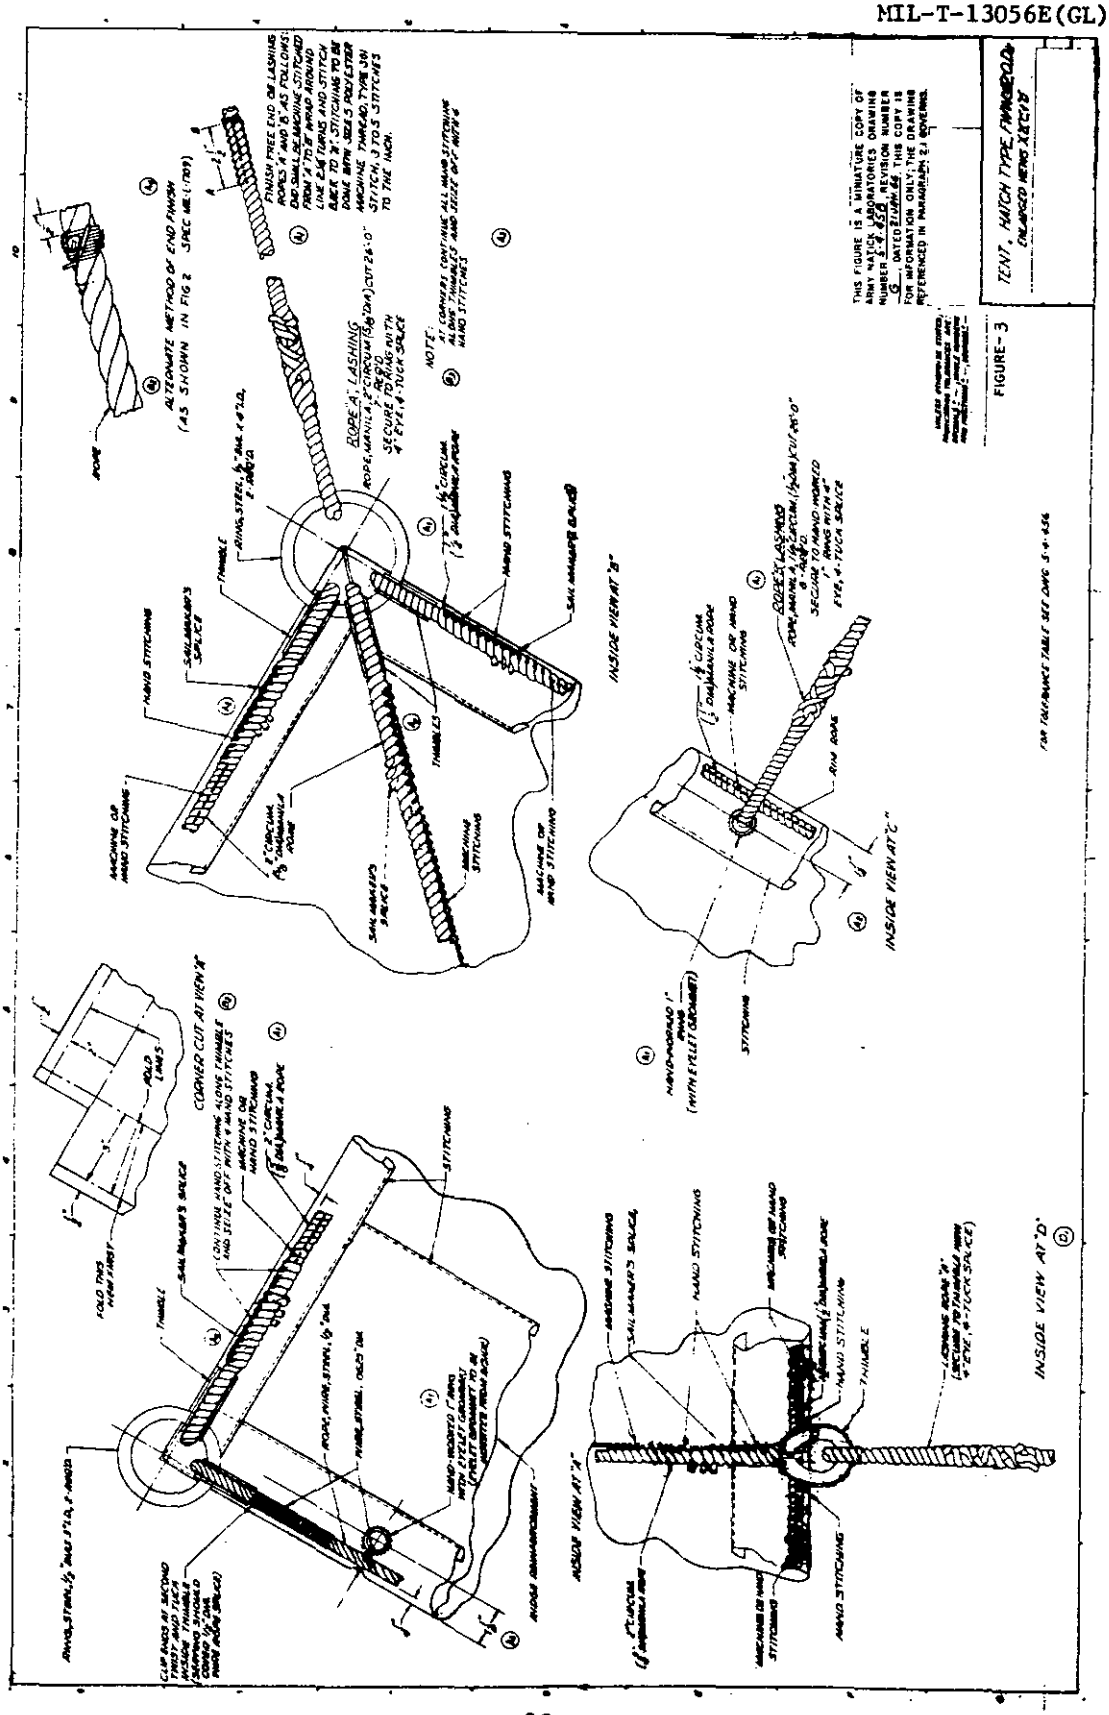

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:00Z
Check the source to verify that this is the current version before use.



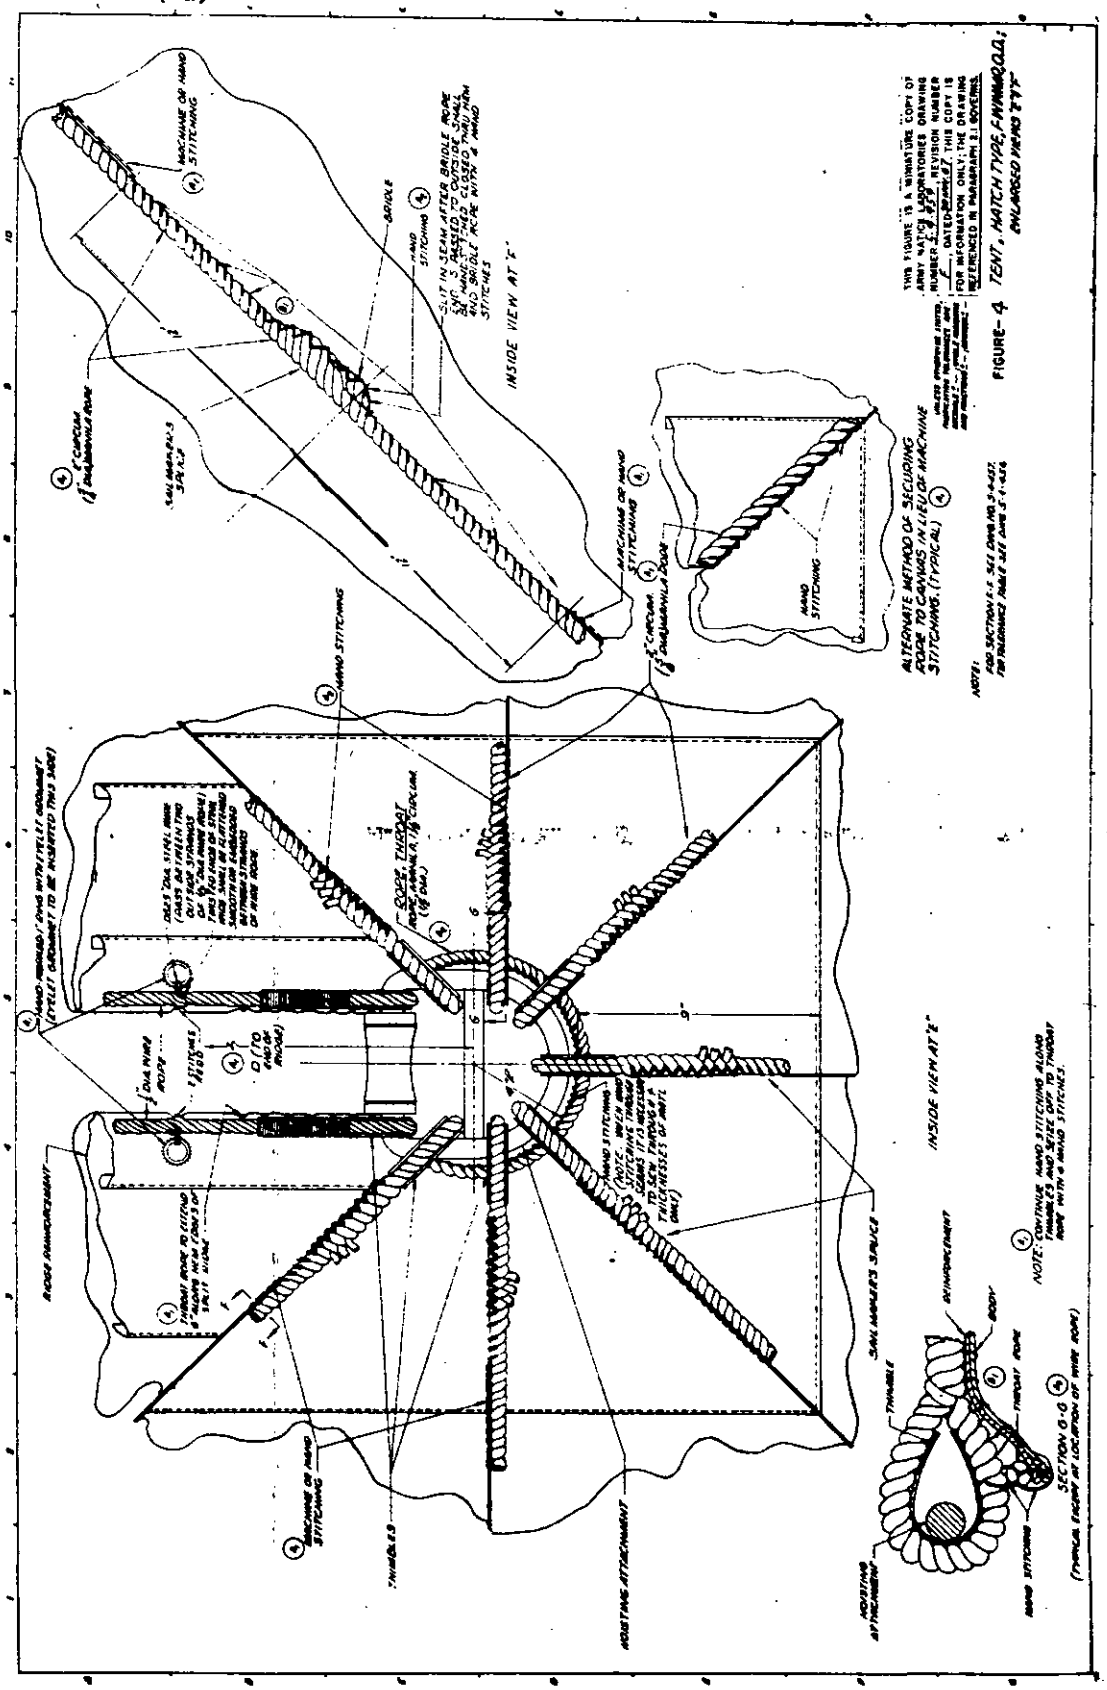



FIGURE 4. TENT, MATCH TYPE, FAMAMCO A/S; ENLARGED HEAD 'B' TYP.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:00Z
Check the source to verify that this is the current version before use.

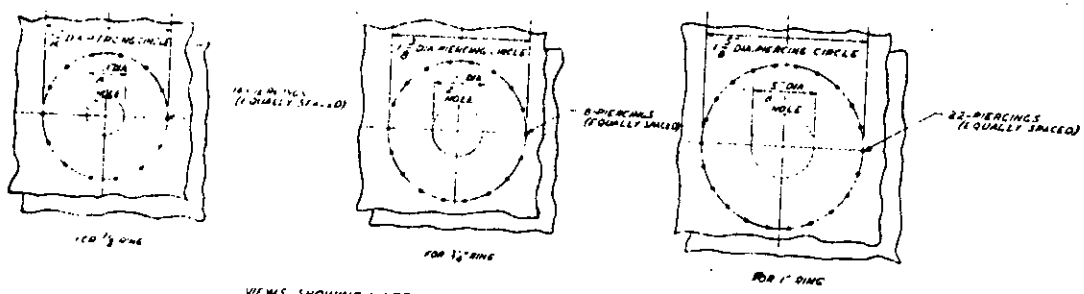

VIEWS SHOWING MATERIAL PIERCED AND PUNCHED BEFORE HAND-WORKING RINGS

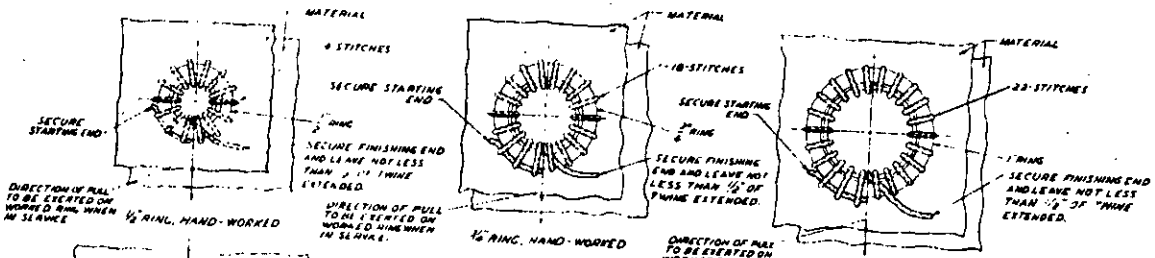

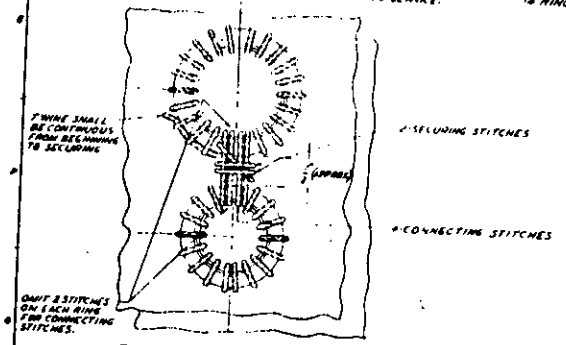

TYPICAL METHOD OF HAND-WORKING AND SECURING TWO RINGS



TYPICAL SECTION THRU HAND-WORKED RINGS

NOTE:
PIERCINGS SHALL BE MADE BY THE USE OF POINTED TAPER PINS. MAXIMUM DIAMETER OF PIERCINGS IN MATERIAL NOT TO EXCEED ⅛"

THIS FIGURE IS A MINIATURE COPY OF ARMY NATICK LABORATORIES DRAWING NUMBER 7-4-99, REVISION NUMBER —, DATED 6 MAY 57 THIS COPY IS FOR INFORMATION ONLY; THE DRAWING REFERENCED IN PARAGRAPH 2.1 GOVERNS.

FIGURE- 5

RINGS, HAND-WORKED

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:00Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-BQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:00Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION Tent, Hatch Type, Fire, Water, Weather and Mildew Resistant, Olive Drab MIL-T-13056E(GL)

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 20260-18T00:00Z
Check the source to verify that this is the current version before use.