MIL-F-27313B(USAF)
23 December 1964
Superseding
MIL-F-27313A(USAF)
10 August 1964

MILITARY SPECIFICATION

FILTER ELEMENT, FLUID, PRESSURE MXU-55/E HYDROCARBON VAPOR REMOVAL

1. SCOPE

1.1 This specification covers one type of hydrocarbon vapor removal, filter element, designated MXU-55/E.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

L-P-378	Plastic Film (Polyethylene Thin Gage)
QQ-S-571	Solder; Tin Alloy; Lead-Tin Alloy; and Lead Alloy
QQ-T-425	Tinplate (Hot Dip and Electrolytic)
TT-N-95	Naptha, Aliphatic
VV-F-815	Fuel Oil, Burner
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner
PPP-B-636	Box, Fiberboard

Military

MIL-P-116	Preservation, Methods of
MIL-D-3716	Desiccants, Activated for Dynamic Dehumidification
MIL-C-4810	Cylinder, Oxygen Purifier
MIL-F-5566	Fluid, Anti-Icing (Isopropyl Alcohol)
MIL-T-7003	Trichloroethylene, Stabilized Degreasing
MIL-L-26087	Lubricating Oil, Reciprocating Compressor, Ground Support
MIL-D-70327	Drawings, Engineering and Associated Lists

STANDARDS

Military

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of U.S. Military Property

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:35Z
Check the source to verify that this is the current version before use.

STANDARDS

Military

MIL-STD-143	Specifications and Standards, Order of Precedance for the Selection of
MIL-STD-831	Test Reports, Preparation of

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Qualification. - The filter element furnished under this specification shall be a product which has been tested and passed the qualification tests specified herein, and has been listed on or approved for listing on the applicable qualified products list.

3.2 Components. - The filter element shall consist of the following major components:

Item Name	See Requirement
Container	3.7.1
Glass-fiber filters	3.7.2
Oil vapor removal material	3.7.3

3.3 Selection of specifications and standards. - Specifications and standards for necessary commodities and services not specified herein shall be selected in accordance with MIL-STD-143.

3.4 Materials. - Materials that are combustible, deteriorate easily, or are otherwise adversely affected by continued use with high-pressure oxygen, hydrogen, helium, nitrogen, or air shall not be used in the filter element.

3.4.1 Combustibility. - Materials that are combustible in contact with high-purity (99.5 percent) oxygen at 300°F and 2,000 psig shall not be used in the filter element.

3.4.2 Protective treatment. - When materials are used in the construction of the filter element that are subject to deterioration when exposed to climatic and environmental conditions likely to occur during service usage, they shall be protected against such deterioration in a manner that will in no way prevent compliance with the performance requirements of this specification. The use of any protective coating that will crack, chip,

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:35Z
Check the source to verify that this is the current version before use.

or scale with age or extremes of climatic and environmental conditions shall be avoided.

3.5 Design and construction. - The filter element shall fit into a cylinder conforming to MIL-C-4810 and shall be designed and constructed in accordance with figure 1.

3.6 Performance

3.6.1 Oil vapor removal. - The outlet oil vapor content shall not exceed 1 part per million total hydrocarbons by volume (expressed as methane equivalent) in the first 500 standard (70°F and 760 mm Hg) cubic feet of gas passed through the filter element at a pressure of 450 +0 -25 psig, at a temperature of 180 ±20°F, and at a flow rate of not less than 10 standard cubic feet per minute, when the inlet gas contains not less than 25 parts per million total hydrocarbons by volume (expressed as methane equivalent). The filter element shall further maintain an outlet oil vapor content not to exceed 2 parts per million total hydrocarbons by volume (expressed as methane equivalent) in the second 700 standard cubic feet of gas passed through the filter element under the same conditions.

3.6.2 Settling and compaction. - The contents of a vertically mounted filter element shall not be settled nor compacted to the extent that the top end retainer will be depressed into the filter body more than 15/32 inch below the top of the end-to-body seam after being subjected to vibration with a vertical double amplitude of not less than 0.032 inch and a simultaneous horizontal double amplitude of not less than 0.035 inch applied over a frequency range of 10 to 55 cps for not less than 20 hours, and when:

a. The filter element remains in the same position it occupied during the vibration

b. The top end has been removed in a manner which will not damage the end-to-body seam or restrict movement of the end retainer

c. An evenly distributed force of not less than 7 pounds is applied along the filter element centerline so as to force the end retainer into the body, and

d. The end retainer depression is measured parallel to the centerline from the extreme top edge of the end-to-body seam to the rim of the retainer cup.

3.6.3 Leakage. - Indication of leakage shall not be evident when a filter element previously temperature stabilized at 95°F or below is totally immersed for not less than 30 minutes in water maintained at 180°F.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:35Z
Check the source to verify that this is the current version before use.

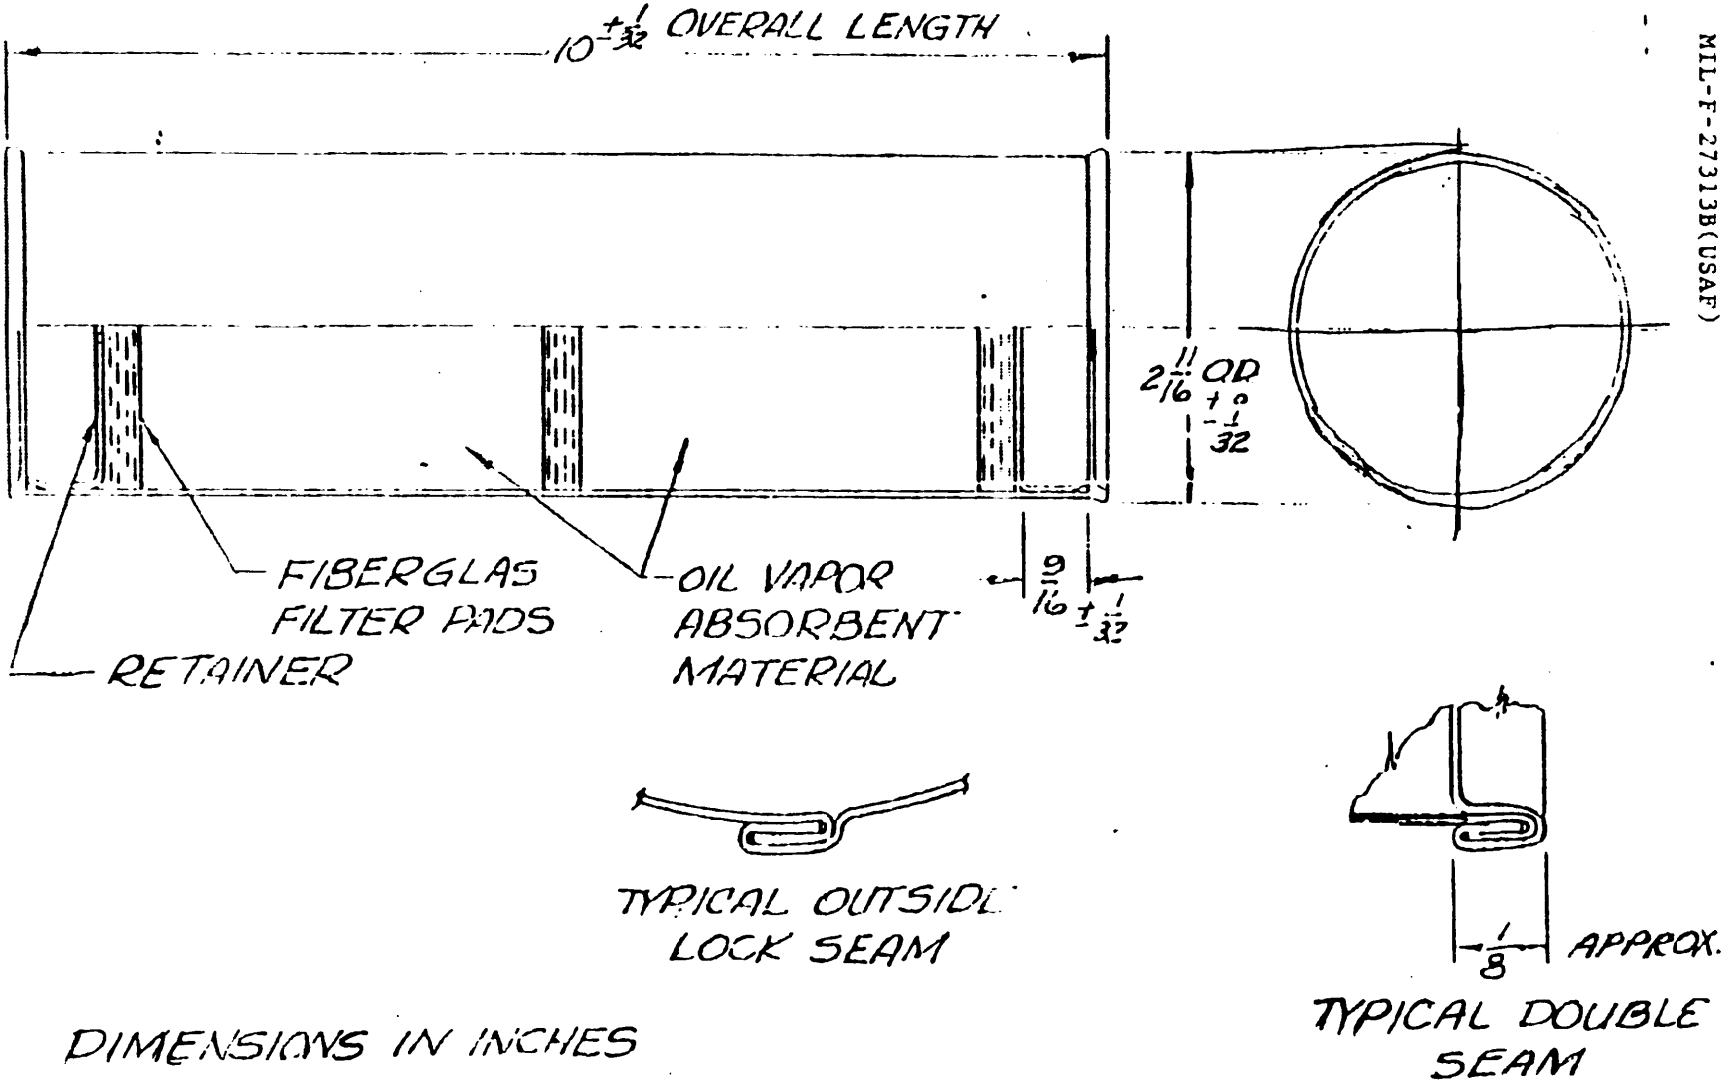


Figure 1. Filter Element Details

Source: https://assist.dla.mil -- Downloaded: 202610-20T11:35Z
Check the source to verify that this is the current version before use.

3.7 Details of components

3.7.1 Container

3.7.1.1 Body. - The container body shall be fabricated from type I, grade 3, 107-pound base weight (pounds per base box) tinplate, having a tin coating of 1.05 pounds per base box minimum average weight test value in accordance with QQ-T-425.

3.7.1.2 Seams. - The body joint shall be an outside lock seam soldered the entire length with tin-lead solder (see 3.7.1.5). The end-to-body seam shall be a double seam approximately 1/8 inch high. See figure 1 for a typical lock and double seam.

3.7.1.3 Ends. - The container ends shall be fabricated from type I, grade 3, 75- to 90-pound base weight (pounds per base box) tinplate, having a tin coating of 1.05 pounds per base box minimum average weight test value in accordance with QQ-T-425.

3.7.1.4 Lining compound. - Lining compound used for end sealing shall be as recommended by the manufacturer. The lining compound shall not adversely affect or be affected by the oil vapor removal material.

3.7.1.5 Soldering. - Soldering operations shall be made with tin-lead solder, composition Sn40, Sn50, or Sn60 conforming to QQ-S-571. Corrosive or combustible flux may be used provided all traces of flux are removed from the outside of the filter element, and, insofar as possible, from the inside. A maximum of 5 mg of solvent extractable flux may be left inside the filter element. Flux containing toxic materials or giving off toxic fumes at a temperature of 200°F or less shall not be used.

3.7.1.6 End retainers. - Retainers shall be provided at the ends of the filter element as shown on figure 1. The retainers shall be formed from iron or steel sheet of nominal 0.030 inch thickness and perforated with 3/32-inch holes on 3/16-inch centers. The retainers shall be free-sliding fit with a clearance not to exceed 0.078 inch on diameter and shall not be bound into the end seams when the container is sealed.

3.7.2 Glass-fiber filters. - Three glass-fiber filters shall be provided in each filter element, one at each end and one in the middle, as shown on figure 1. The filters shall withstand temperatures up to 600°F without damage. They shall contain no bonding agent or impregnation that will burn or be absorbed by the oil vapor removal material. The filters shall be cut not less than 3/4 inch oversize on diameter from glass wool stock of sufficient density and thickness to support a uniform load of 1-1/2 psi without being compressed to a thickness of less than 5/16 inch. The filters shall be so installed that free passage of gases or oil vapor removal material particles will not occur between the filter and the wall of the container.

Source: https://assist.dla.mil -- Downloaded: 202610-20T11:35Z
Check the source to verify that this is the currentversion before use.

3.7.3 Oil vapor removal material. - The oil vapor removal material shall meet the particle size, particle strength, and corrosiveness requirements as applicable to type II, grade H or M desiccant in accordance with MIL-D-3716. The particle size shall be between 8 and 16 mesh. The material shall be mechanically and chemically nontoxic and shall not deliquesce in the presence of oil, water, or their vapors. A gas or liquid shall not be produced or caused to be produced by reaction of the oil vapor removal material to oil, water, or their vapors.

3.7.3.1 Oil vapor removal material quantity. - The filter element shall be filled with sufficient oil vapor removal material to insure that:

a. The material will be held in compression by the fiberglass filter pads after filter element assembly

b. When the top end is removed from a filter element with its centerline in the vertical plane, the end retainer will be so forced from the body by the filter pad resiliency that the upper edge of the retainer cup lip will extend not less than 1/32 inch outside the unbroken end-to-body seam.

3.8 Part numbering of interchangeable parts. - All parts having the same manufacturer's part number shall be functionally and dimensionally interchangeable. The item identification and part number requirements of MIL-D-70327 shall govern the manufacturer's part numbers and changes thereto.

3.9 Exterior finish. - The exterior surface of the filter element shall be finished with tinplate only.

3.10 Operational markings

3.10.1 Handling instructions. - The instructions specified in table I shall be printed on the polyethylene bag specified in 3.12.3. The printing shall be legible and of a permanent nature.

3.10.1.1 Intended use marking. - In addition to the instructions specified in table I, the following note shall be printed on the polyethylene bag:

THIS FILTER ELEMENT IS INTENDED FOR USE WITH THE TYPE MB-1 OXYGEN PURIFIER CYLINDER TO REMOVE OIL VAPOR FROM HIGH-PRESSURE AIR, HYDROGEN, HELIUM, OR NITROGEN GASES DURING GROUND SERVICING OF AIRCRAFT OR MISSILE GAS SYSTEMS.

3.11 Identification of product. - The filter element protective bag shall be marked in accordance with MIL-STD-130 as specified for parts.

3.11.1 End marking. - The manufacturer's mark and the year of manufacture shall be stamped on one end of the filter element.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:35Z
Check the source to verify that this is the current version before use.

TABLE I

INSTRUCTIONS FOR REPLACING FILTER ELEMENTS IN HOLDERS
1. Release pressure in filter holder. 2. Remove filter holder cap assembly and extract exhausted filter element. 3. Inspect holder and cap assembly to insure gaskets are in proper condition and position. 4. Filter element holder interior should be free from dust, paint, or metal chips; grease, oil, water, or other contaminants. NOTE: When contamination is found in filter element holders, remove the complete filter element holder from the unit, wash (including cap assembly) in clean, pure cleaning solvent, then wash with hot water detergent or soap solution. Rinse in clean water and dry. Install new gaskets and replace holder on the servicing unit. 5. Open the end of the plastic bag and slip filter element into holder. Do not touch filter element during insertion. 6. Fit the cap assembly into place, press down, and start threads into engagement. The cutters will be forced into the top and bottom of the filter element as the cap assembly is screwed into place. 7. Screw cap assembly down to a moderately tight fit using a handtool between the cap lugs. 8. Pressurize SLOWLY and check for leaks.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:35Z
Check the source to verify that this is the current version before use.

3.12 Cleaning and degreasing

3.12.1 Cleaning and degreasing prior to assembly. - The filter element shell, including the ends and retaining discs, shall be degreased before assembly. After the shell side seam and one end have been assembled and sealed, cleaning shall be accomplished by one of the following methods:

3.12.1.1 Method A. - A vapor degreasing method with stabilized trichloroethylene conforming to MIL-T-7003 shall be used. The filter element shall be blown clean and dry with a stream of clean, dry, oil-free air until all traces of the trichloroethylene fluid have been removed.

3.12.1.2 Method B. - The filter element shall be flushed with naphtha conforming to TT-N-95 and blown clean and dry of all solvent with oil-free air. It shall then be flushed with anti-icing fluid conforming to MIL-F-5566 or anhydrous ethyl alcohol and rinsed thoroughly with fresh, clean water. Following this, the filter element shall be thoroughly dried with a stream of clean, dry, oil-free air.

3.12.1.3 Method C. - The filter element shall be flushed with a hot, inhibited, alkaline cleaner until all traces of foreign matter have been removed and thoroughly rinsed with clean water. It shall then be thoroughly dried with a stream of clean, dry, oil-free air.

3.12.2 Final degreasing. - After final assembly and testing, all filter elements shall be degreased and defluxed and thoroughly dried before being packaged in the polyethylene bag specified in 3.12.3. Final degreasing shall be accomplished in accordance with method A, B, or C as specified in 3.12.1.1, 3.12.1.2, and 3.12.1.3. After final degreasing, the filter element shall be handled in such a manner as to preclude contamination.

3.12.3 Protective bag. - After final cleaning and inspection, each filter element shall be sealed within a translucent polyethylene bag conforming to L-P-378, type I, grade B, finish 2, having a minimum thickness of 5 mils. The bag shall be of sufficient size to permit filter element to be slipped from the bag and into the holder without touching the filter element with the bare hands.

3.13 Workmanship. - The filter element shall be fabricated and finished in a thoroughly workmanlike manner. Particular attention shall be given to freedom from blemishes, defects, burrs, and sharp edges; accuracy of dimensions; thoroughness of soldering; et cetera. Loose, spattered, or excess solder, metal chips, solder flux, and all other foreign material shall be removed prior to final degreasing.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:35Z
Check the source to verify that this is the current version before use.

of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of test. - The inspection and testing of the filter element shall be classified as follows:

a. Qualification testing.....See 4.4

b. Acceptance tests.....See 4.5.

4.3 Test conditions

4.3.1 Instrumentation

4.3.1.1 Pressure measurements. - Pressures shall be recorded in pounds per square inch gage. Pressure differentials shall be recorded in inches of water or inches of mercury, as applicable.

4.3.1.2 Temperature measurements. - Temperatures shall be measured by appropriately located thermometers or thermocouples used with calibrated potentiometers. Temperatures shall be recorded in degrees Fahrenheit.

4.3.1.3 Flow measurements. - Gas flow measurements shall be obtained by passing the material through a properly calibrated meter designed to handle the gas being measured. Gas flow rates shall be recorded as standard cubic feet per minute (scfm). Total quantities of gas passed shall be recorded as standard cubic feet (scf).

4.3.2 Preparation for test. - The filter element shall be prepared for testing as required by the specific test instructions.

4.3.3 Observations. - During the progress of all tests, the performance of the filter element shall be observed to determine the degree of compliance with all requirements specified herein.

4.3.4 Test data. - Test data shall be recorded as required under the specific tests.

4.3.4.1 Correction of data. - If the tests specified herein cannot be conducted under the specified conditions, the tests may, upon approval by the procuring activity for each deviation from the specified conditions, be conducted under other conditions and the performance under the specified conditions calculated from the test results obtained. The manner of calculation shall be demonstrated, and actual data proving the correctness of the calculation methods shall be presented along with the report to the

Source: https://assist.dla.mil -- Downloaded: 202610-20T11:35Z
Check the source to verify that this is the current version before use.

procuring activity.

4.3.4.2 Tolerances. - The tolerances shall be as follows:

a. Pressure gages shall be accurate to within 2 percent of the numerical figure recorded

b. Temperatures shall be accurate to within 2°F

c. Measurements of total hydrocarbon quantities, expressed as parts per million by volume (methane equivalent), shall be accurate to within 1/2 parts per million in the range of 0 to 5 and within 2 parts per million in the range of 5 to 30

d. Gas flow rates shall be accurate to within 2 percent of the numerical figure recorded

e. Total gas flow quantities shall be accurate to within 2 percent of the numerical figure recorded.

4.4 Qualification testing

4.4.1 Qualification requirement. - Prior to actual procurement, the product that this specification covers shall pass the qualification tests specified herein. If the product is later modified in any way, the modified form shall be subjected to and shall pass the same qualification tests.

4.4.2 Test samples. - The test samples shall consist of a minimum of 12 filter elements fabricated from random samples of the component parts and specified materials using production processes and procedures. The samples shall be appropriately identified with the manufacturer's own part number and any additional identification required by the authorizing letter. Allocation of test samples and testing shall be in accordance with the following schedule:

Test		Sample Number											
		1	2	3	4	5	6	7	8	9	10	11	12
Examination of product	(4.6.1)	X	X	X	X	X	X	X	X	X	X	X	X
Dimensions	(4.6.2)	X	X	X	X	X	X	X	X	X	X	X	X
Two-minute leakage	(4.6.3)	X	X	X	X	X	X	X	X	X	X		
Thirty-minute leakage	(4.6.4)	X	X	X	X	X	X	X	X	X	X		
Quantity of oil vapor removal material	(4.6.5)											X	X
Performance	(4.6.6)	X	X	X	X	X	X	X	X				
Solder flux removal	(4.6.7)											X	
Combustibility	(4.6.8)												X
Settling and compaction	(4.6.9)									X	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:35Z
Check the source to verify that this is the current version before use.

4.4.3 Test report. - After the qualification tests are completed, three complete copies of a test report in accordance with MIL-STD-831 shall be prepared.

4.5 Acceptance tests. - The acceptance tests shall consist of the following:

a. Individual tests.....See 4.5.1

b. Sampling plan and tests.....See 4.5.2

4.5.1 Individual tests. - Each filter element shall be subjected to the following tests as described under 4.6:

a. Examination of product.....See 4.6.1

b. Dimensions.....See 4.6.2

c. Two-minute leakage.....See 4.6.3

d. Cleaning effectiveness.....See 4.6.10

4.5.2 Sampling plan and tests

4.5.2.1 Lot. - A lot shall consist of filter elements manufactured under essentially the same conditions and submitted for inspection at substantially the same time.

4.5.2.2 Sampling plan. - Two filter elements shall be selected at random from each lot of five hundred or fraction thereof on the order and subjected to the following tests as described under 4.6:

Test		Sample No. 1	Sample No. 2
4.6.4	Thirty-minute leakage test	X	X
4.6.5	Quantity of oil vapor removal material	X	
4.6.6	Performance		X
4.6.7	Solder flux removal	X	

4.5.2.2.1 Rejection and retest. - When one or more items from a lot fail to meet the specification, acceptance of all items in the lot shall be withheld until the extent and cause of failure are determined. The contractor shall explain fully to the Government representative the cause of failure and the action taken to preclude recurrence. After corrections have been made, all necessary tests shall be repeated.

4.5.2.2.2 Individual tests may continue. - For production reasons, individual tests may be continued pending the investigation of a sampling test failure. But final acceptance of the entire lot or lots produced later shall not be

Source: https://assist.dla.mil -- Downloaded: 202640-20T11:35Z
Check the source to verify that this is the currentversion before use.

made until it is determined that all items meet all the requirements of the specification.

4.5.3 Defects in items already accepted. - The investigation of a test failure could indicate that defects may exist in items already accepted. If so, the contractor shall fully advise the procuring activity of all defects likely to be found and method of correcting them.

4.6 Test methods

4.6.1 Examination of product. - The filter element shall be inspected to determine compliance with the requirements specified herein with respect to materials, workmanship, and marking. Particular attention shall be given to freedom from excess solder or imperfections in the lip formed by the end-to-body seam.

4.6.2 Dimensions. - The filter element shall be checked by go and no-go gages to determine compliance with the diameter and length requirements specified herein.

4.6.3 Two-minute leakage. - The filter element shall be temperature stabilized throughout at 95° F or below immediately prior to this test. The filter element shall be immersed in water maintained at a minimum temperature of 180° F for a minimum of 2 minutes to check for leakage. A definite continuous forming and breaking away of air bubbles from definite points on the surface of the filter element shall be an indication of leakage and cause for rejection. Presence of bubbles clinging to the surface of the container or occasional formation of bubbles due to escape of air trapped within the seams shall not be considered cause for rejection. If no leakage is evident after this test, the filter elements shall be cleaned in accordance with one of the methods specified in 3.12.1.1, 3.12.1.2, or 3.12.1.3.

4.6.4 Thirty-minute leakage. - The filter element shall be temperature stabilized throughout at 95° F or below immediately prior to this test. The filter shall be completely submerged in a hot water bath with the water maintained at a temperature of not less than 180° F for at least 30 minutes. A definite and continuous forming and breaking away of air bubbles from definite points on the surface of the filter shall be an indication of leakage and cause for rejection. When a filter element fails to pass this test, four additional filter elements shall be tested. Failure of any of the additional four shall be cause for rejection of the lot. Presence of bubbles clinging to the surface of the container or occasional formation of bubbles due to escape of air trapped within the seams shall not be considered cause for rejection.

4.6.5 Quantity of oil vapor removal material. - The filter element shall be placed in an upright position and the top end removed in a manner that will not damage the end-to-body seam. The resiliency of the fiberglass filters shall cause the upper edge of the retainer to raise and project not less

Source: https://assist.dla.mil -- Downloaded: 20260-20T11:35Z
Check the source to verify that this is the current version before use.

than 1/32 inch above the top of the end-to-body seam, or the filter element shall be considered to have failed the test. When a filter element fails to pass this test, four additional filter elements shall be tested. Failure of any of the additional four shall be cause for rejection of the lot.

4.6.6 Performance test

4.6.6.1 Apparatus. - Apparatus for this test shall consist of a 10-cfm source of 450-psi clean dry air or nitrogen, an oil vapor saturator, a total hydrocarbon detector and gas flow measuring equipment. The total hydrocarbon detector shall be accurate to within ±1/2 part per million by volume to 5 parts per million and to within ±2 parts per million by volume to 30 parts per million. Certified verification of the accuracy of the hydrocarbon detector shall be furnished.

4.6.6.2 Conditions. - The test shall consist of a continuous run until the oil vapor content of the gas leaving the filter element reaches not less than 3 ppm by volume of total hydrocarbons or until not less than 2,000 standard (70° F and 760 mm Hg) cubic feet of gas has passed through the filter element. For qualification testing only, the sample filter element(s) shall be weighed to an accuracy within ±0.5 gram immediately before and after each filter element test run.

4.6.6.3 Test. - The air or nitrogen shall contain not less than 25 parts per million oil vapor total hydrocarbon concentration by volume (expressed as methane equivalent) at a temperature of 180 ± 20° F and a pressure not greater than 450 psi. The air or nitrogen containing oil vapor shall then be passed through the sample filter element at the above specified temperature and pressure and at the rate of not less than 10 scfm. The hydrocarbon content and quantity of flow shall be measured. The gas flow rate shall be constant for each run to within ±1 percent. The oil used for vapor concentration in the gas stream shall conform to MIL-L-26087. Burner fuel oil conforming to VV-F-815, grade F. S., No. 2, may be added to and thoroughly mixed with the MIL-L-26087 lubricant in a ratio not to exceed 1/2 pint (8 fluid ounces) per gallon for increased test oil vaporization at the above specified temperature and pressure.

4.6.6.3.1 The following readings shall be taken at intervals of not less than 15 minutes during a test run:

a. Saturator temperature and pressure

b. Total hydrocarbon content of gas entering the filter element in parts per million by volume expressed as methane equivalent

c. Temperature at inlet to filter element

d. Total hydrocarbon content of gas leaving the filter element in parts per million by volume expressed as methane equivalent

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:35Z
Check the source to verify that this is the current version before use.

e. Rate of flow through the filter element

f. Total flow through the filter element.

The total hydrocarbon content by volume shall not exceed 1 ppm in the gas leaving the filter element before a total flow of 500 standard (70° F and 760 mm Hg) cubic feet, likewise the total hydrocarbon content by volume shall not exceed 2 ppm in the gas leaving the filter element before a total flow of 1,200 standard cubic feet, or the filter element shall be considered to have failed the test. When a filter element fails to pass this test, four additional filter elements shall be tested. Failure of any of the additional four shall be cause for rejection of the lot.

4.6.7 Solder flux removal. - The interior and exterior of the filter element shall be examined to determine if any solder flux is evident. The seams shall be washed with a flux solvent and the amount of flux extractable determined. If more than 5 mg of the flux is found on or in the filter element, the filter element shall be rejected.

4.6.8 Combustibility. - Samples of each of the materials used in the filter elements shall be tested for combustibility by exposing them to oxygen at high temperatures. Approximately 0.5 gram of each material shall be placed in an oxygen bomb that shall be pressurized to 2,000 psi with 99 percent pure oxygen and heated uniformly to 300° F for not less than 1 hour. A sudden temperature rise or change in the appearance or chemical composition of the material shall be considered to be evidence of combustion and noncompliance with 3.4.1.

4.6.9 Settling and compaction. - The filter element shall be mounted in an upright position on the test facility. The facility shall be so adjusted that a vertical double amplitude of 0.032 inch and a horizontal double amplitude of 0.035 inch will be applied over a range of frequencies beginning at 10 cps, increasing to 55 cps, and returning to 10 cps over a time interval of 2 minutes. The above vibration sequence shall be continued for 20 hours. With the filter element remaining in an upright position on the vibration facility, the top end shall be removed in a manner that will not damage the end-to-body seam or restrict free movement of the end retainer. An evenly distributed force of no less than 7 pounds shall then be applied vertically downward on the end retainer to force it into the filter element body. The top edge of the retainer rim shall not be depressed to more than 15/32 inch below the top of the end seam, or filter element shall be considered to have failed the test. When a filter element fails to pass this test, four additional filter elements shall be tested. Failure of any of the additional four shall be cause for rejection of the lot.

4.6.10 Cleaning effectiveness tests

4.6.10.1 Visual inspection. - During and after assembly, the filter element body, ends, and retaining discs, shall be visually examined for evidence

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:35Z
Check the source to verify that this is the current version before use.

of corrosion products, metal chips, scale, oil, grease, paints, preservatives, decals, or other contamination or foreign matter. Any evidence of contamination of foreign matter shall require recleaning and retest.

4.6.10.2 Ultraviolet light inspection. - With filter element body side seam and one end assembled and sealed, all accessible surfaces and parts shall be visually inspected for hydrocarbons with ultraviolet light. With the container filled and completely closed, the filter element shall again be visually inspected for hydrocarbons with ultraviolet light. Evidence of fluorescence during either inspection shall require recleaning and retest.

4.7 Inspection of the preservation, packaging, and packing. - The inspection of the preservation, packaging, and packing shall be in accordance with the instructions of section 5 herein.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. - Preservation and packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A

5.1.1.1 Prior to preservation and packaging, each filter element shall be thoroughly cleaned and dried in accordance with 3.12.2.

5.1.1.2 Filter elements bagged in accordance with 3.12.3 shall be unit packaged one each, method III in accordance with MIL-P-116 in containers conforming to PPP-B-636. Closure and sealing of the containers shall be in accordance with the specifications and appendix thereto.

5.1.2 Level C. - Packaging shall be in accordance with the manufacturer's commercial practice.

5.2 Packing

5.2.1 Packing shall be levels A, B, or C, as specified (see 6.2). Shipping containers insofar as practical shall be uniform in size and shape and of minimum cube and tare weight consistent with the protection required, and shall contain identical quantities.

5.2.1.1 Level A. - Filter elements preserved and packaged in accordance with 5.1.1 shall be packed in an overseas type container conforming to PPP-B-621. Closure and strapping shall be in accordance with the container specification and appendix thereto.

5.2.1.2 Level B. - Filter elements, preserved and packaged as specified in 5.1.1, shall be packed in domestic-type exterior containers conforming to PPP-B-621 or PPP-B-636. Exterior containers shall be of uniform shape and size and shall contain identical quantities. Containers shall be closed

Source: https://assist.dla.mil -- Downloaded: 202610-20T11:35Z
Check the source to verify that this is the current version before use.

and strapped in accordance with the applicable container specification or appendix thereto.

5.2.1.3 Level C. - Filter elements preserved and packaged as specified in 5.1 which require overpacking for acceptance by carrier shall be packed in a shipping container which will insure safe delivery at the lowest transportation rate. Containers shall meet the Consolidated Freight rules and regulations of other common carriers as applicable to the mode of transportation.

5.3 Marking. - Unit, intermediate, and shipping containers shall be marked in accordance with MIL-STD-129. The nomenclature shall be:

Filter Element, Fluid, Pressure MXU-55/E Hydrocarbon Vapor Removal.

6. NOTES

6.1 Intended use. - The MXU-55/E filter element is intended for use in the Type MB-1 oxygen purifier cylinder conforming to MIL-C-4810 to remove hydrocarbons from high-pressure gases when charging aircraft and missile high-pressure gas systems from the ground.

6.2 Ordering data. - Procurement documents should specify the following:

a. Title, number, and date of this specification

b. Applicable levels of preservation and packaging, and packing (see 5.1 and 5.2.1).

6.3 Qualification. - With respect to products requiring qualification, awards will be made only for such products as have, prior to the time set for opening of bids, been tested and approved for inclusion in the applicable Qualified Products List whether or not such products have actually been so listed by that date. The attention of the suppliers is called to this requirement, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. The activity responsible for the Qualified Products List is the Systems Engineering Group, Wright-Patterson Air Force Base, Ohio, Attn: SEMSF, and information pertaining to qualification of products may be obtained from that activity.

Custodian:
Air Force - 11

Preparing activity:
Air Force - 11

Reviewers:
Air Force - 11, 84

Source: https://assist.dla.mil -- Downloaded: 202610-20T11:35Z
Check the source to verify that this is the current version before use.