NOT MEASUREMENT SENSITIVE

MIL-D-3943/47C
12 June 1992
SUPERSEDING
MIL-D-3943/47B
31 March 1987

MILITARY SPECIFICATION SHEET


DECORATION, MEDAL FOR MERIT

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-D-3943.



OBVERSE

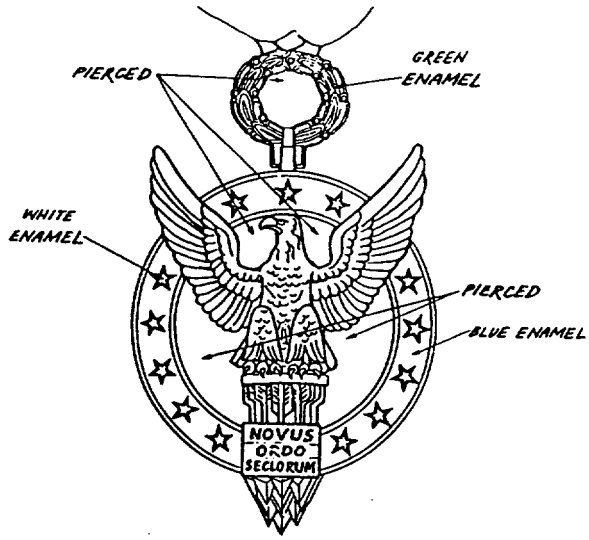



REVERSE

MATERIAL: Gilding Metal

FINISH: Hard Enameled, Gold Plated, Matte Finish

DASH NO:
-1: Regular Size
-2: Miniature

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:05Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

PENDANT:

HEIGHT (Overall):
-1: 1-7/8 inches (4.76 cm) (REF)
-2: (Including Suspense Ring): 1-1/2 inches (3.81 cm) (REF)

WIDTH (Overall):
-1: 1-1/2 inches (3.81 cm) (REF)
-2: 3/4 inch (1.91 cm) (REF)

THICKNESS (At thickest point):
-1: 0.195 inch ± 0.005 inch (0.495 cm ± 0.012 cm)
-2: 0.115 inch ± 0.005 inch (0.292 cm ± 0.012 cm)

SUSPENSION BAR: (See Note 1)

HEIGHT (Including Hinged Joint): 19/32 inch (1.51 cm) (REF)

WIDTH (Overall): 19/32 inch (1.51 cm) (REF)

THICKNESS (At thickest point): 0.100 inch ± 0.010 inch (0.254 cm ± 0.025 cm)

NOTES:

1. The suspension bar for the Dash No. 2 decoration is an integral part of the pendant. Therefore, dimensions given for the suspension bar are for the Dash No. 1 decoration only.

2. Pierced areas shall be as indicated.

3. The enamel colors shall be as indicated. The color shall conform to TIOH Color Chip Numbers listed below or the standard sample.

COLOR	CHIP NO.
Green	11
Blue	18
White	28

4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. The epoxy resin shall be a stoning epoxy, have a shore D hardness of no less than 85 and incorporate an ultraviolet inhibitor.

5. The pendant ribbon ring for Dash No. 1 shall be soldered to the top of the wreath. The ring shall have an outside diameter of 13/32 inch + 1/32 inch - 0 (1.03 cm + 0.08 cm - 0) and shall be formed from 0.045 inch ± 0.002 inch (0.114 cm ± 0.005 cm) in diameter brass wire.

6. Type I Decoration set shall consist of a regular size medal, a service ribbon and a rosette all packaged in a presentation case conforming to MIL-C-14633, Style 6, Type VIII with a Class 1 or 1A pad.

7. The ribbon for the pendant drape and service ribbon shall conform to MIL-R-11589/86.

Source: https://assist.dla.mil - Downloaded: 2026-10-16T23:05Z
Check the source to verify that this is the current version before use.

8. The rosette shall conform to MIL-R-14649/11.

9. The term (REF) refers to the measurements taken from the Government furnished hub or die.

Custodians:
Army - IH
Navy - NU
Air Force - 11

Review activities:
Air Force - 82,99
Navy - MC
DLA - CT

User activity:
Air Force - 45
Navy - CG

Preparing activity:
Army - IH

(Project No. 8455-0669)

Source: https://assist.dla.mil - Downloaded: 2026-10-16T23:05Z
Check the source to verify that this is the current version before use.