INCH-POUND

MIL-DTL-3943/47G
6 June 2007
SUPERSEDING
MIL-DTL-3943/47F
11 May 1997

DETAIL SPECIFICATION SHEET


DECORATION, MEDAL FOR MERIT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.



OBVERSE

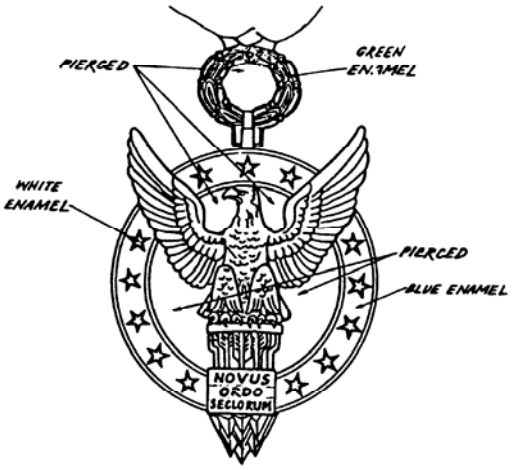



REVERSE

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Gilding Metal

FINISH: Hard Enameled, Gold Plated, Polished Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:05Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

PENDANT:

HEIGHT (overall):

-1: 1-7/8 inches (REF)

-2: (including suspense ring): 1-1/2 inches (REF)

WIDTH (overall):

-1: 1-1/2 inches (REF)

-2: 3/4 inch (REF)

THICKNESS (at thickest point):

-1: 0.195 inch ± 0.010 inch

-2: 0.115 inch ± 0.010 inch

SUSPENSION BAR: (See Note 2)

HEIGHT (including hinged joint): 19/32 inch(REF)

WIDTH (overall): 19/32 inch (REF)

THICKNESS (at thickest point): 0.100 inch ± 0.010 inch

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The suspension bar for the Dash No. -2 decoration is an integral part of the pendant. Therefore, dimensions given for the suspension bar are for the Dash No. -1 decoration only.

3. Pierced areas shall be as indicated.

4. Enamel colors shall be as indicated. The colors shall conform to TIOH Hard Enamel Color Chip Numbers listed below.

COLOR	CHIP NO.
Green	11
Blue	18
White	28

5. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. When epoxy resin is used in lieu of hard enamel, the material requirement shall be gilding metal or red brass.

6. The pendant ribbon ring for Dash No. -1 shall be soldered to the top of the wreath. The ring shall have an outside diameter of 13/32 inch + 1/32 inch - 0 and shall be formed from 0.045 inch ± 0.002 inch in diameter brass wire.

7. Decoration set shall consist of a regular size medal, a service ribbon, and a rosette all packaged in a presentation case conforming to MIL-DTL-14633, Type VIII, Style 6 with a Class 1, 1A or 3 pad.

8. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/86.

9. The rosette shall conform to MIL-DTL-14649/11.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:05Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Air Force – 11
Navy - NU

Preparing activity:
Army - IH
(Project No. 8455-2007-051)

Review activities:
Air Force - 99
Navy - MC
Coast Guard - CG
DLA – CT

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:05Z
Check the source to verify that this is the current version before use.