INCH-POUND


MIL-DTL-3943/47H
27 June 2016
SUPERSEDING
MIL-DTL-3943/47G
6 June 2007

DETAIL SPECIFICATION SHEET

DECORATION, MEDAL FOR MERIT

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.

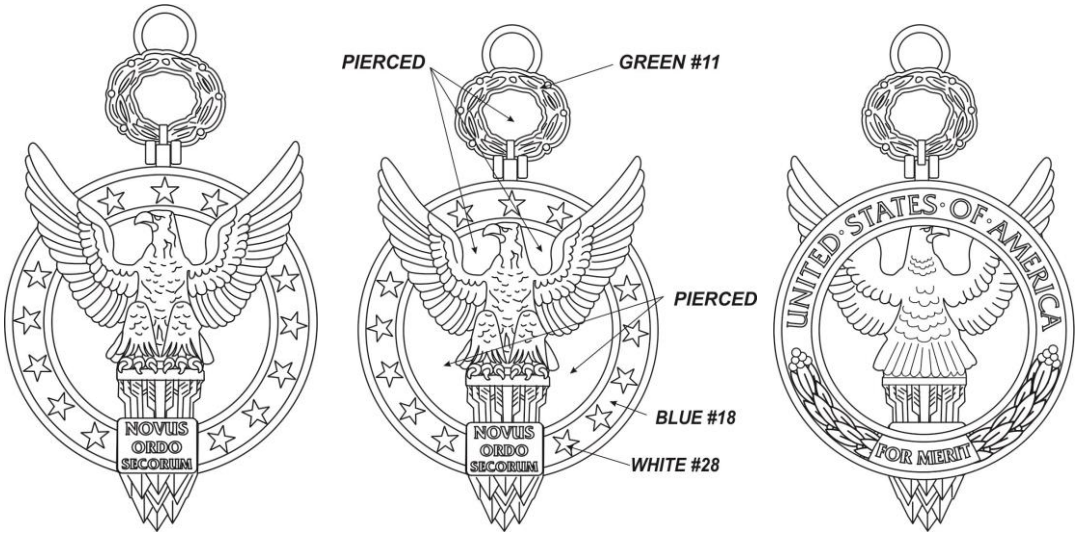

OBVERSE REVERSE

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: Epoxy resin, 24KGold Plated, Polished Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 7.

DIMENSIONS:
PENDANT:
HEIGHT (Overall):
-1: 1-7/8 inches (REF)
-2: (Including suspense ring): 1-1/2 inches (REF)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:05Z
Check the source to verify that this is the current version before use.

WIDTH (Overall):
-1: 1-1/2 inches (REF)
-2: 3/4 inch (REF)
THICKNESS (At thickest point):
-1: 0.195 inch ± 0.010 inch
-2: 0.115 inch ± 0.010 inch
SUSPENSION BAR: (See Note 2)
HEIGHT (Including hinged joint): 19/32 inch (REF)
WIDTH (Overall): 19/32 inch (REF)
THICKNESS (At thickest point): 0.100 inch ± 0.010 inch

DECORATION SET: Decoration set shall consist of a regular size medal, a service ribbon, and a rosette all packaged in a presentation case conforming to MIL-C-14633, Type VIII, Style 6 with a Class 1, 1A or 3 pad.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The suspension bar for -2 decoration is an integral part of the pendant, Therefore, dimensions given for the suspension bar are for -1 decoration only.

3. Pierced areas shall be as indicated.

4. The pendant ribbon ring for -1 shall be soldered to the top of the wreath. The ring shall have an outside diameter of 13/32 inch + 1/32 inch - 0 and shall be formed from 0.045 inch ± 0.002 inch in diameter brass wire.

5. The ribbon for the pendant drape and service ribbon shall conform to MIL-DTL-11589/86.

6. For commercial sale only may be manufactured using 24K Gold Plate Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

EPOXY: Epoxy resin (Stoning epoxy) shall be applied to the Decoration as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below.

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Green	#11
Blue	#18
White	#28

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:05Z
Check the source to verify that this is the current version before use.

Custodians:
Army - IH
Air Force - 11
Navy - MC

Preparing activity:
Army - IH

Review activities:
Navy - CG1
DLA - CT

(Project No. 8455-2016-555)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T23:05Z
Check the source to verify that this is the current version before use.