MILITARY SPECIFICATION SHEET


CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE, (NARROW FLANGE MOUNT, BAYONET COUPLING, CRIMP SOCKET CONTACT), (SERIES I, CLASSES A, G, AND R)

Ⓑ

This specification is approved for use by all Departments and Agencies of the Department of Defense.

Ⓑ The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Specification MIL-C-26482.

Ⓑ INACTIVE. SUPERSEDED BY MS3470 OF MIL-C-26482.

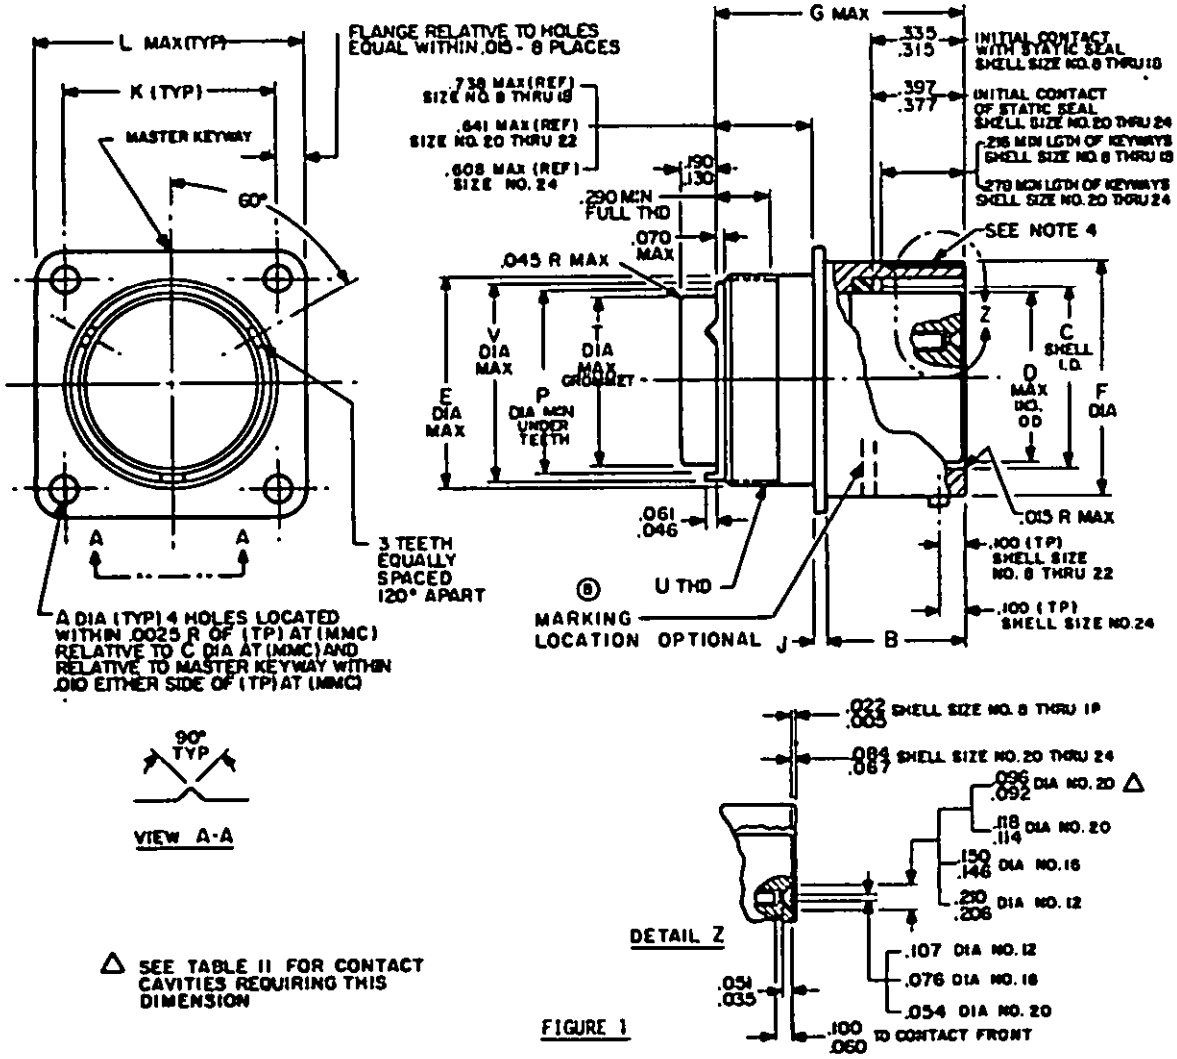

△ SEE TABLE II FOR CONTACT CAVITIES REQUIRING THIS DIMENSION

FIGURE 1

Ⓑ denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:16Z
Check the source to verify that this is the current version before use.


TABLE I
CONNECTOR DIMENSIONS

SIZE	A	B	C	D	E	F	G	J	K	L	M	N	P	T
8	.120	.462 .431	.367 .361	.285	.499	.474 .468	1.215	.078 .046	.594	.828	.417 .406	.563 .547	.370	.305
10	.120	.462 .431	.495 .489	.402	.625	.591 .585	1.215	.078 .046	.719	.954	.545 .534	.680 .664	.497	.405
12	.120	.462 .431	.612 .606	.516	.750	.751 .745	1.215	.078 .046	.812	1.047	.694 .683	.859 .843	.613	.531
14	.120	.462 .431	.737 .731	.641	.875	.876 .870	1.215	.078 .046	.906	1.141	.819 .808	.984 .968	.738	.665
16	.120	.462 .431	.862 .856	.766	1.000	1.001 .995	1.215	.078 .046	.969	1.234	.944 .933	1.108 1.092	.863	.790
18	.120	.462 .431	.967 .961	.855	1.062	1.126 1.120	1.215	.078 .046	1.062	1.328	1.044 1.033	1.233 1.217	.919	.869
20	.120	.587 .556	1.092 1.086	.980	1.187	1.251 1.245	1.275	.110 .078	1.156	1.453	1.169 1.158	1.358 1.342	1.044	.994
22	.120	.587 .556	1.217 1.211	1.105	1.312	1.376 1.370	1.275	.110 .078	1.250	1.578	1.294 1.283	1.483 1.467	1.169	1.119
24	.147	.620 .589	1.342 1.336	1.229	1.437	1.501 1.495	1.275	.110 .078	1.375	1.703	1.419 1.408	1.610 1.594	1.294	1.244

SIZE	U THREAD	V	W	W'	W''	W'''	W''''	X	X'	X''	X'''
8	1/2-20 UNF-2A	.437	1.492	1.842	2.115	4.769	2.119	1.061	1.411	1.684	4.370
10	5/8-24 UNEF-2A	.572	1.492	1.842	2.115	4.769	2.219	1.061	1.411	1.684	4.370
12	3/4-20 UNEF-2A	.687	1.492	1.842	2.250	4.769	2.349	1.061	1.411	1.819	4.370
14	7/8-20 UNEF-2A	.812	1.492	2.077	2.340	4.769	2.349	1.061	1.646	1.909	4.370
16	1-20 UNEF-2A	.937	1.492	2.077	2.475	4.769	2.579	1.061	1.646	2.044	4.370
18	1 1/16-18 UNEF-2A	.992	1.492	2.077	2.574	4.769	2.579	1.061	1.646	2.143	4.370
20	1 3/16-18 UNEF-2A	1.117	1.552	2.137	2.767	4.829	2.869	.996	1.581	2.211	4.305
22	1 5/16-18 UNEF-2A	1.242	1.552	2.137	2.890	4.829	2.869	.996	1.581	2.334	4.305
24	1 7/16-18 UNEF-2A	1.367	1.552	2.137	3.012	4.829	3.109	.963	1.548	2.423	4.272

SIZE	X''''	Y	Y'
8	1.720	.830	3.250
10	1.820	.880	3.250
12	1.950	.950	3.250
14	1.950	1.010	3.250
16	2.180	1.070	3.250
18	2.180	1.130	3.250
20	2.345	1.190	3.250
22	2.345	1.260	3.250
24	2.552	1.320	3.250

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:16Z
Check the source to verify that this is the current version before use.

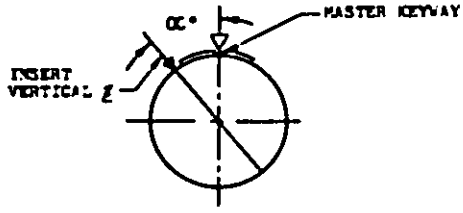

SOCKET INSERT
FACE VIEW
(AS VIEWED FROM ENGAGING END)
INSERT POSITION

▽ INDICATES ℄ OF SHELL

FIGURE 2



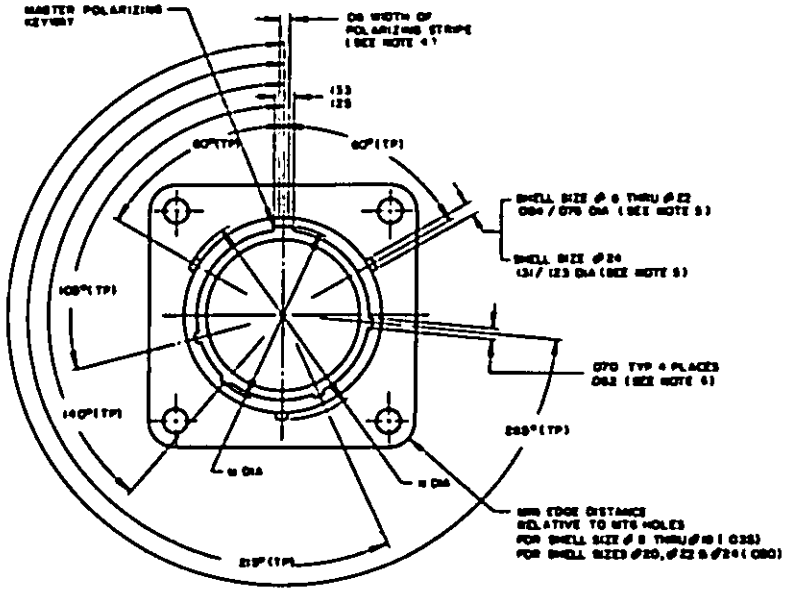


FIGURE 3


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:16Z
Check the source to verify that this is the current version before use.




WITH STRAIGHT BACKSHELL
LESS STRAIN RELIEF

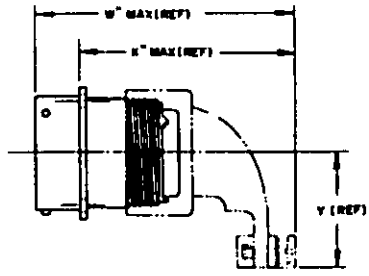


ASSEMBLED TO 90° BACKSHELL
WITH STRAIN RELIEF




ASSEMBLED TO BACKSHELL
WITH STRAIGHT SHRINK STRAIN
RELIEF

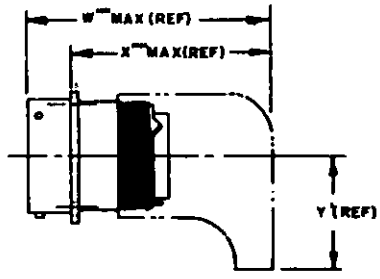

ASSEMBLED TO BACKSHELL WITH
90° SHRINK STRAIN RELIEF



ASSEMBLED TO STRAIGHT BACKSHELL
WITH STRAIN RELIEF

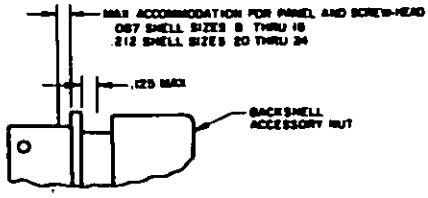

MAX PANEL THICKNESS (TYP)

FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:16Z
Check the source to verify that this is the current version before use.

TABLE II. Insert arrangements requiring reduced diameters for lead-in chamfer on outer row of contact cavities as indicated.

Shell	Insert arrangements	Contact cavities
8	33 and 98	A, B, and C
12	10	C and G
14	12	A,B,C,D,E,F,G, and H
14	18	A,C,E,G,J, and L
14	19	B,D,F,H,K, and M
16	26	A,B,C,D,E,F,G,H,J, K,L,M,N,P, and R
18	32	A,B,C,D,E,F,G,H,J, K,L,M,N,P,R,S, and T
22	41	A,B,C,D,E,F,G,H,J, K,L,M,N,P,R,S,T,U, V,W,X, and Y

NOTES:

1. FOR ALTERNATE POLARIZING POSITIONS, THE CONNECTOR INSERT IS ROTATED IN RESPECT TO THE SHELL.

2. IN "NORMAL POSITION" (POSITION "N") THE INSERT VERTICAL CENTER LINE COINCIDES WITH THE CENTER LINE OF THE MASTER KEYWAY OF THE SHELL.

3. IN "ALTERNATE POSITIONS" (POSITIONS "W", "X", "Y", AND "Z") THE SOCKET INSERT IS ROTATED α DEGREES COUNTERCLOCKWISE RELATIVE TO THE $\mathcal{E}$ OF THE MASTER KEYWAY OF SHELL.

4. POLARIZING STRIPE SHALL BE COLOR CODED BLUE

5. THREE (3) PROJECTIONS LOCATED WITHIN .005 R (TP) AT (MMC) RELATIVE TO "F" DIA (MMC) AND SHELL FRONT, AND WITHIN .010 EITHER SIDE OF (TP) AT (MMC) RELATIVE TO MASTER POLARIZING KEYWAY.

6. FOUR KEYWAYS (MMC) AND INSERT SHALL BE LOCATED WITHIN .0035 EITHER SIDE OF (TP) RELATIVE TO MASTER KEYWAY (MMC) AND SHELL I.D. (MMC).

7. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE SHALL BE .XX ±.010 AND .XXX ±.005; ANGULAR, X°±1°-0' AND X°X'±30'.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:16Z
Check the source to verify that this is the current version before use.

TABLE III WIRE DATA

CONTACT SIZE	WIRE SIZE AWG	INSULATION O.D. IN INCHES / WIRE SPECIFICATION 3/			
		MIL-W-22759/4	MIL-W-16878/4	MIL-W-81381/-	
				LIGHT WT-/1	MEDIUM WT-/3
20	24	—	.040/.048 1/	.037/.043	.047/.054
	22	.071/.077	.046/.054	.043/.050	.053/.060
	20	.079/.085 2/	.054/.062	.051/.058	.061/.068
16	20	.079/.085	.054/.062 1/	.051/.058	.061/.068
	18	.092/.098	.064/.074	.060/.067	.071/.079
	16	.099/.107 2/	.073/.087	.066/.074	.079/.087
12	14	.112/.120 1/	.087/.101	.080/.089	.091/.099
	12	.129/.137 2/	.106/.120	.098/.108	.107/.117

1/ WIRE TO BE USED FOR CONNECTOR QUALIFICATION.

2/ WIRE TO BE USED FOR CONTACT QUALIFICATION.

3/ LISTED WIRE SPECIFICATIONS ARE NOT ALL INCLUSIVE. WIRE WITH SMOOTH EXTERIOR SURFACE, WHICH FALLS WITHIN THE SPECIFIED RANGE AND MEETS THE DESIGNERS CRITERIA, MAY BE USED IN APPLICATION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:16Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures.

This connector mates with MIL-C-83723/14(USAF)

(B) For insert arrangements see MIL-STD-1669.

Rear hardware must be used per MIL-C-83723/15, /16(USAF), or Air Force Drawing 7045704.


Connector assembly must include a backshell to meet the moisture sealing requirements.

(B) Shell material: Classes A and R - Aluminum alloy per QQ-A-367.
Class G - Corrosion resistant steel per QQ-S-763.

Wire: See table III.

(B) Connector identification marking shall be in accordance with MIL-C-26482. Example: MS3470L----, M83723/01R----.

Part number example:

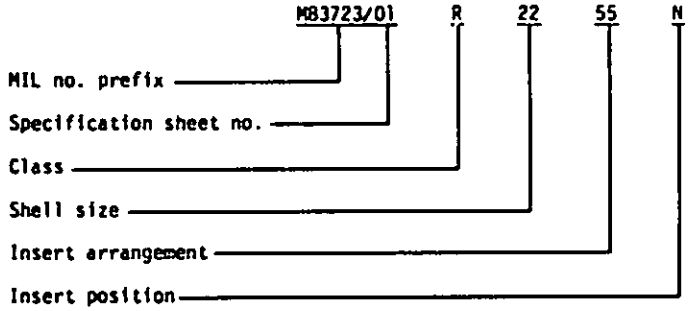

Custodian:
Air Force - 85

Review activities:
Air Force - 11, 17, 70, 71, 80, 82, 84
DSA - ES

Preparing activity:
Air Force - 85

(Project 5935-F964-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:16Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE AIR FORCE

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

HQ AFLC/LOZPP
Wricht-Patterson AFB, OH 45433

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:16Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assistdla.mil — Downloaded: 2026-10-28T08:16Z
Check the source to verify that this is the current version before use.