
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE, (SINGLE HOLE MOUNT, BAYONET COUPLING, CRIMP SOCKET CONTACT), (SERIES I, CLASSES A, G, AND R)

This specification sheet is approved for use by the Engineering and Technical Support Division (APLC), Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Specification MIL-C-26482.

INACTIVE. SUPERSEDED BY MS3474 of MIL-C-26482.

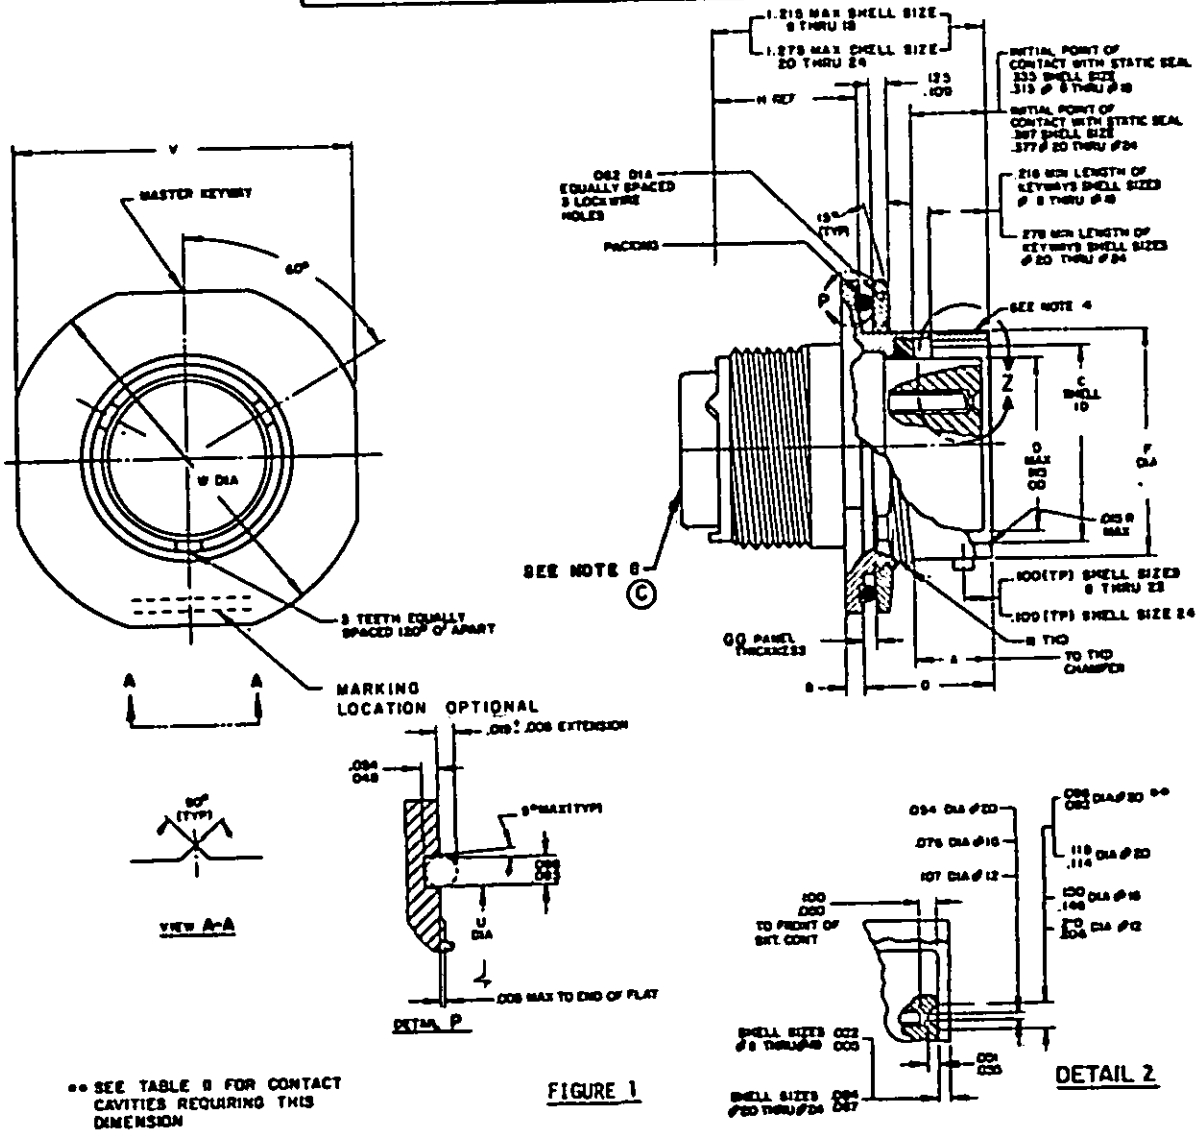

•• SEE TABLE II FOR CONTACT CAVITIES REQUIRING THIS DIMENSION

FIGURE 1

© denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 202640-23T09:17Z
Check the source to verify that this is the currentversion before use.


TABLE I
CONNECTOR DIMENSIONS

SIZE	A	B	C	D	F	G	H	N THREAD
8	.378 .358	.113 .086	.367 .361	.285	.474 .468	.707 .691	.524	9/16-24 UNEF-2A
10	.378 .358	.113 .086	.495 .489	.402	.591 .585	.707 .691	.524	11/16-24 UNEF-2A
12	.378 .358	.113 .086	.612 .606	.516	.751 .745	.707 .691	.524	7/8-20 UNEF-2A
14	.378 .358	.113 .086	.737 .731	.641	.876 .870	.707 .691	.524	1-20 UNEF-2A
16	.378 .358	.113 .086	.862 .856	.766	1.001 .995	.707 .691	.524	1 1/8-18 UNEF-2A
18	.378 .358	.113 .086	.967 .961	.855	1.126 1.120	.707 .691	.524	1 1/4-18 UNEF-2A
20	.378 .358	.148 .096	1.092 1.086	.980	1.251 1.245	.772 .754	.521	1 3/8-18 UNEF-2A
22	.378 .358	.148 .096	1.217 1.211	1.105	1.376 1.370	.772 .754	.521	1 1/2-18 UNEF-2A
24	.405 .385	.148 .096	1.342 1.336	1.229	1.501 1.495	.772 .754	.521	1 5/8-18 UNEF-2A

SIZE	U	V	W	X	Y	Z	AA	BB	BB'	BB''	BB'''	BB''''	CC	CC'
8	.609	.954 .923	1.078 1.047	.525	.417 .406	.563 .547	.767	1.492	1.842	2.115	4.774	2.124	.801	1.151
10	.734	1.078 1.047	1.203 1.172	.650	.545 .534	.680 .664	.892	1.492	1.842	2.115	4.774	2.224	.801	1.151
12	.921	1.266 1.235	1.391 1.360	.813	.694 .683	.859 .843	1.079	1.492	1.842	2.250	4.774	2.354	.801	1.151
14	1.046	1.391 1.360	1.516 1.485	.937	.819 .808	.984 .968	1.205	1.492	2.077	2.340	4.774	2.354	.801	1.386
16	1.171	1.516 1.485	1.641 1.610	1.061	.944 .933	1.108 1.092	1.329	1.492	2.077	2.475	4.774	2.584	.801	1.386
18	1.296	1.641 1.610	1.766 1.735	1.186	1.044 1.033	1.233 1.217	1.455	1.492	2.077	2.574	4.774	2.584	.801	1.386
20	1.484	1.828 1.797	1.954 1.923	1.311	1.169 1.158	1.358 1.342	1.579	1.552	2.137	2.767	4.834	2.874	.798	1.383
22	1.609	1.954 1.923	2.078 2.047	1.436	1.294 1.283	1.483 1.467	1.705	1.552	2.137	2.890	4.834	2.874	.798	1.383
24	1.734	2.078 2.047	2.203 2.172	1.561	1.419 1.408	1.610 1.594	1.829	1.552	2.137	3.012	4.834	3.114	.798	1.383

SIZE	CC''	CC'''	CC''''	DD	DD'	EE	FF	GG
8	1.424	4.083	1.433	.830	3.250	.536	.572	.187 .062
10	1.424	4.083	1.533	.880	3.250	.661	.697	.187 .062
12	1.559	4.083	1.663	.950	3.250	.824	.895	.187 .062
14	1.649	4.083	1.663	1.010	3.250	.948	1.010	.187 .062
16	1.784	4.083	1.893	1.070	3.250	1.072	1.135	.187 .062
18	1.883	4.083	1.893	1.130	3.250	1.197	1.260	.187 .062
20	2.013	4.080	2.120	1.190	3.250	1.322	1.385	.250 .062
22	2.136	4.080	2.120	1.260	3.250	1.447	1.510	.250 .062
24	2.258	4.080	2.360	1.320	3.250	1.572	1.635	.219 .062

Source: https://assist.dla.mil -- Downloaded: 202640-23T09:17Z
Check the source to verify that this is the current version before use.

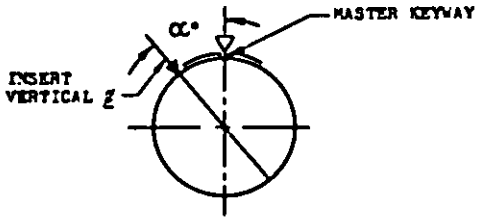

SOCKET INSERT
FACE VIEW

(AS VIEWED FROM MNGAGING END)

INSERT POSITION

▽ INDICATES ℄ OF SHELL

FIGURE 2



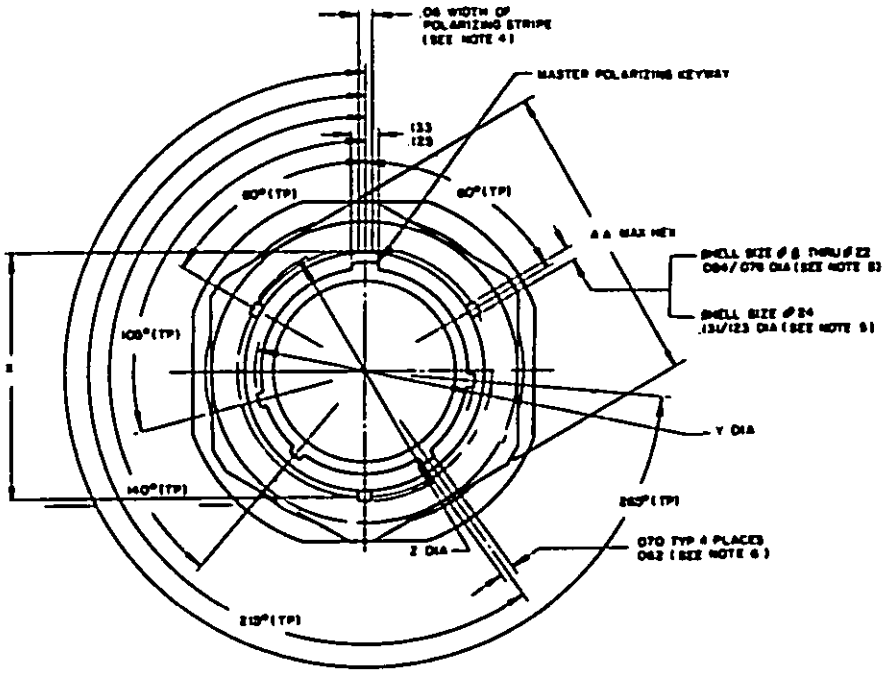


FIGURE 3


Source: https://assist.dla.mil -- Downloaded: 202640-23T09:17Z
Check the source to verify that this is the currentversion before use.




ASSEMBLED TO STRAIGHT BACKSHELL
LESS STRAIN RELIEF




ASSEMBLED TO STRAIGHT BACKSHELL
WITH STRAIN RELIEF

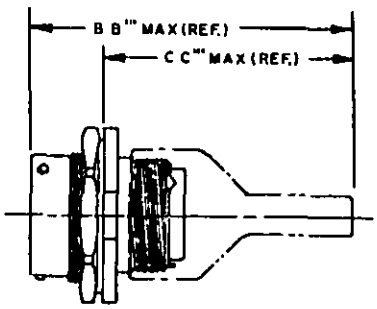


ASSEMBLED TO BACKSHELL
WITH STRAIGHT SHRINK STRAIN
RELIEF

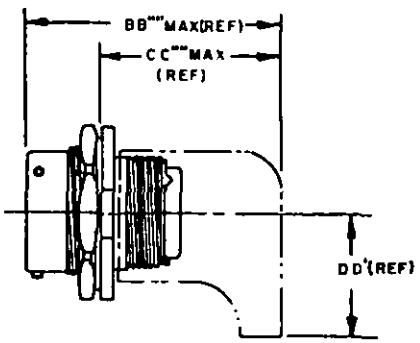

ASSEMBLED TO BACKSHELL WITH
90° SHRINK STRAIN RELIEF

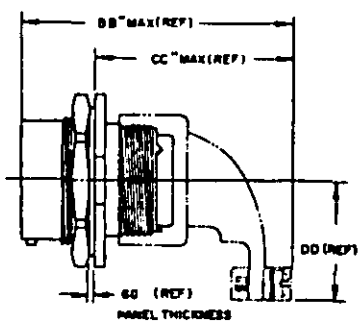

ASSEMBLED TO 90° BACKSHELL
WITH STRAIN RELIEF

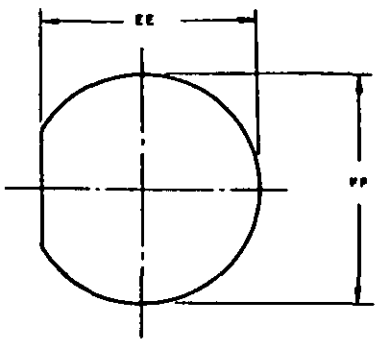

PANEL CUTOUT

FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 202640-23T09:17Z
Check the source to verify that this is the current version before use.

TABLE II. Insert arrangements requiring reduced diameters for lead-in chamfer on outer row of contact cavities as indicated.

Shell	Insert arrangements	Contact cavities
8	33 and 98	A, B, and C
12	10	C and G
14	12	A,B,C,D,E,F,G, and H
14	18	A,C,E,G,J, and L
14	19	B,D,F,H,K, and M
16	26	A,B,C,D,E,F,G,H,J, K,L,M,N,P, and R
18	32	A,B,C,D,E,F,G,H,J, K,L,M,N,P,R,S, and T
22	41	A,B,C,D,E,F,G,H,J, K,L,M,N,P,R,S,T,U, V,W,X, and Y

NOTES:

1. FOR ALTERNATE POLARIZING POSITIONS, THE CONNECTOR INSERT IS ROTATED IN RESPECT TO THE SHELL.
2. IN "NORMAL POSITION" (POSITION "N") THE INSERT VERTICAL CENTER LINE COINCIDES WITH THE CENTER LINE OF THE MASTER KEYWAY OF THE SHELL.
3. IN "ALTERNATE POSITIONS" (POSITIONS "W", "X", "Y", AND "Z") THE SOCKET INSERT IS ROTATED α DEGREES COUNTERCLOCKWISE RELATIVE TO THE $\mathcal{E}$ OF THE MASTER KEYWAY OF SHELL.
4. POLARIZING STRIPE SHALL BE COLOR CODED BLUE.
5. THREE (3) PROJECTIONS LOCATED WITHIN .005 R (TP) AT (MMC) RELATIVE TO "F" DIA (MMC) AND SHELL FRONT, AND WITHIN .010 EITHER SIDE OF (TP) AT (MMC) RELATIVE TO MASTER POLARIZING KEYWAY.
6. FOUR KEYWAYS (MMC) AND INSERT SHALL BE LOCATED WITHIN .0035 EITHER SIDE OF (TP) RELATIVE TO MASTER KEYWAY (MMC) AND SHELL I.D. (MMC).
7. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE SHALL BE .XX ±.010 AND .XXX ±.005; ANGULAR, X°±1°-0' AND X°X'±30'.
8. REAR ACCESSORY INTERCHANGEABILITY DIMENSIONS SHALL BE IN ACCORDANCE WITH MIL-C-26482.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:17Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures.

This connector mates with MIL-C-83723/13 and /14(USAF).

For insert arrangements see MIL-STD-1669.

© Rear hardware must be used per MIL-C-83723/15, /16, /47, MS3416, MS3417, or MS3418.


Connector assembly must include a backshell to meet the moisture sealing requirements.

"O" ring shall be furnished with connector.

Shell material: Classes A and R - Aluminum alloy per QQ-A-367.
Class G - Corrosion resistant steel per QQ-S-763

Connector identification marking shall be in accordance with MIL-C-26482.
Example: MS3474L----, M83723/05R----.

Part number example:

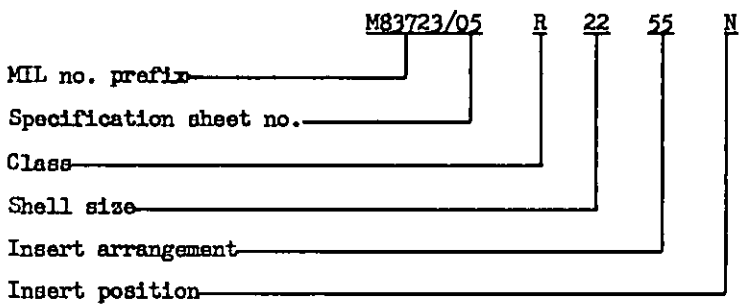

Custodian:
Air Force - 85

Review activities:
Air Force - 11, 17, 99
DSA - ES

Preparing activity:
Air Force - 85

(Project 5935-F043-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:17Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. *DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product* are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-C-83723/5C (USAF) Connectors, Electrical, (Circular, Environment Resisting)

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER FSC 5935

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

C16061

Source: https://assist.dla.mil -- Downloaded: 202640-23T09:17Z
Check the source to verify that this is the current version before use.

FOLD

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE AIR FORCE
DoD-318

U.S. MAIL

AFLC/LOIE/Standardization
Wright-Patterson AFB OH 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:17Z
Check the source to verify that this is the current version before use.