INCH-POUND
MIL-C-83723/74D
30 June 1992
SUPERSEDING
MIL-C-83723/74C
31 December 1986

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE, (SINGLE HOLE MOUNT, BAYONET COUPLING, CRIMP PIN CONTACT), (SERIES III, CLASSES A, G, R, AND W)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

(D) The requirements for acquiring the connectors described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-83723.

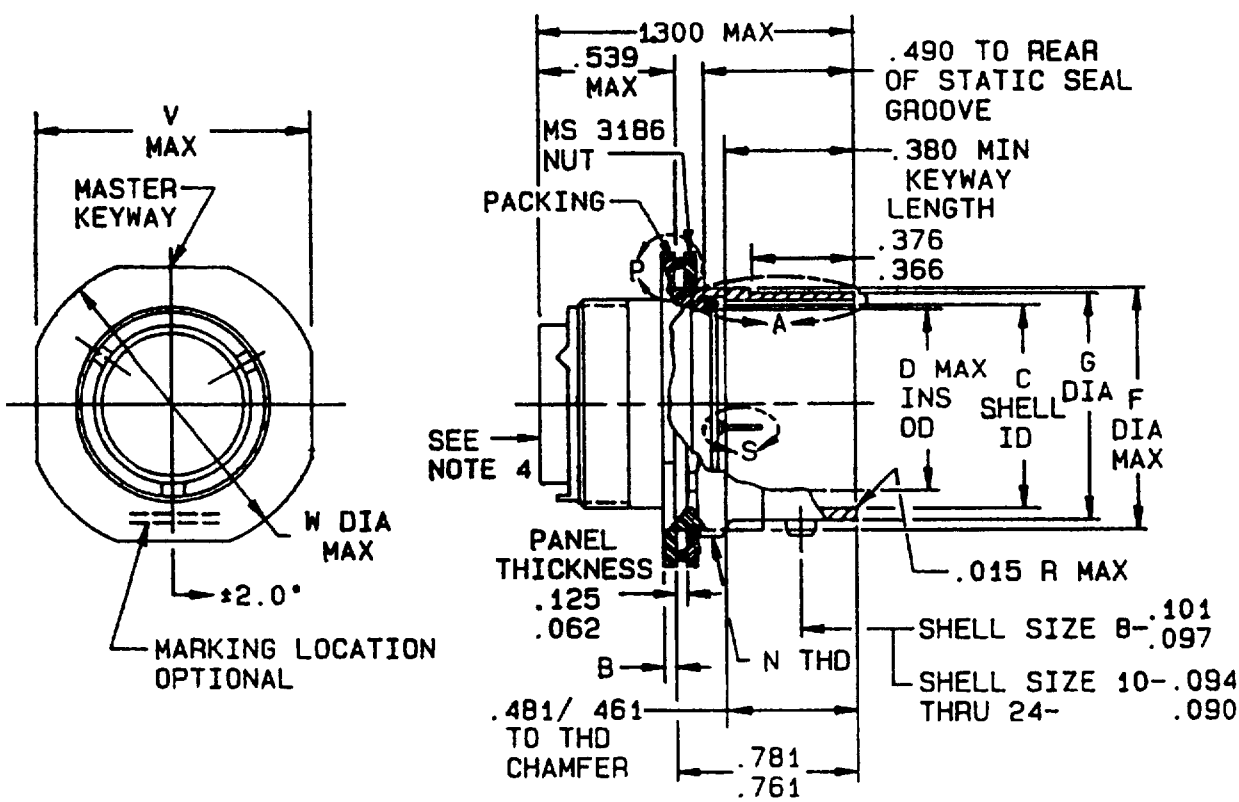


FIGURE 1. Dimensions and configurations.

(D) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

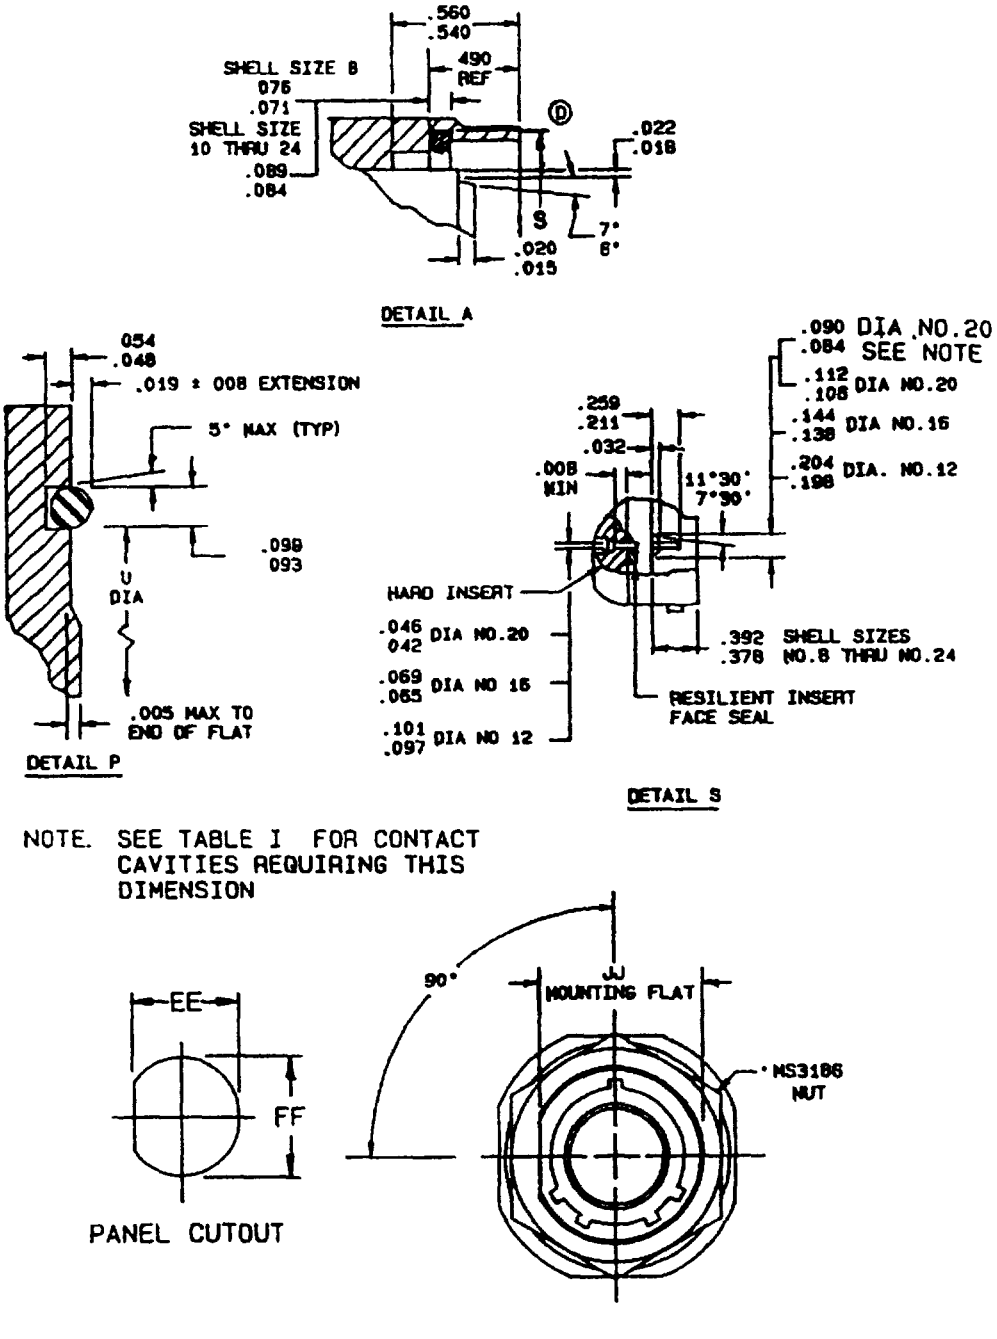


FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

(D)

Connector dimensions.

Shell size	B	C	D	F	G	N thread UNEF-2A
8	.137 .097	.428 .433	.312	.561	.536 .531	.625-20 UN-2A
10	.137 .097	.530 .535	.388	.696	.659 .654	.750-20 UNEF-2A
12	.137 .097	.700 .705	.558	.875	.829 .824	.9375-20 UNEF-2A
14	.137 .097	.769 .774	.627	.935	.898 .893	1.000-20 UNEF-2A
16	.137 .097	.869 .901	.772	1.062	1.025 1.020	1.125-20 UN-2A
18	.137 .097	1.002 1.007	.860	1.187	1.131 1.126	1.250-18 UNEF-2A
20	.137 .097	1.127 1.132	.985	1.312	1.256 1.251	1.375-18 UNEF-2A
22	.168 .128	1.252 1.257	1.110	1.437	1.381 1.376	1.500-18 UNEF-2A
24	.168 .128	1.377 1.382	1.235	1.562	1.506 1.501	1.625-18 UNEF-2A

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

Connector dimensions - Continued.

Shell size	U	V	Ⓓ S +.005 -.000	W	EE	FF	JJ
8	.670	.979	.508	1.068	.605	.635	.596 .590
10	.796	1.104	.636	1.192	.730	.760	.721 .715
12	.984	1.291	.806	1.380	.917	.947	.908 .902
14	1.046	1.391	.875	1.505	.980	1.010	.971 .965
16	1.171	1.516	1.002	1.630	1.105	1.135	1.096 1.090
18	1.296	1.641	1.108	1.756	1.229	1.260	1.220 1.214
20	1.484	1.766	1.233	1.860	1.354	1.385	1.345 1.339
22	1.609	1.954	1.358	2.086	1.479	1.510	1.470 1.464
24	1.734	2.079	1.483	2.160	1.604	1.635	1.595 1.589

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.211	5.36	.721	18.31	1.090	27.69	1.385	35.18
.008	0.20	.259	6.58	.730	18.54	1.096	27.84	1.391	35.33
.015	0.38	.312	7.92	.750	19.05	1.104	28.04	1.437	36.50
.018	0.46	.366	9.30	.760	19.30	1.105	28.07	1.455	36.96
.019	0.48	.376	9.55	.761	19.33	1.108	28.14	1.464	37.19
.020	0.51	.378	9.60	.769	19.53	1.110	28.19	1.470	37.34
.022	0.56	.380	9.65	.772	19.61	1.125	28.58	1.479	37.57
.032	0.81	.388	9.86	.774	19.66	1.127	28.63	1.483	37.67
.042	1.07	.392	9.96	.781	19.84	1.132	28.75	1.484	37.69
.046	1.17	.428	10.87	.796	20.22	1.135	28.83	1.500	38.10
.062	1.57	.433	11.00	.806	20.47	1.171	29.74	1.510	38.35
.065	1.65	.461	11.71	.860	21.84	1.187	30.15	1.516	38.51
.069	1.75	.481	12.22	.875	22.23	1.192	30.28	1.562	39.67
.071	1.80	.490	12.45	.896	22.76	1.214	30.84	1.589	40.36
.076	1.93	.508	12.90	.901	22.89	1.220	30.99	1.595	40.51
.084	2.13	.530	13.46	.902	22.91	1.229	31.22	1.604	40.74
.089	2.26	.535	13.59	.908	23.06	1.233	31.32	1.609	41.87
.090	2.29	.539	13.69	.917	23.29	1.235	31.37	1.625	41.28
.093	2.36	.540	13.72	.935	23.75	1.250	31.75	1.630	41.40
.094	2.39	.558	14.17	.9375	23.81	1.252	31.80	1.635	41.53
.097	2.46	.560	14.22	.947	24.05	1.257	31.93	1.641	41.68
.098	2.49	.561	14.25	.965	24.51	1.260	32.00	1.734	44.04
.101	2.57	.590	14.99	.971	24.66	1.291	32.79	1.756	44.60
.106	2.69	.596	15.14	.979	24.87	1.296	32.92	1.766	44.86
.109	2.77	.605	15.37	.980	24.89	1.300	33.02	1.860	47.24
.112	2.84	.625	15.88	.984	24.99	1.312	33.32	1.954	49.63
.125	3.18	.627	15.93	.985	25.02	1.339	34.01	2.068	52.53
.128	3.25	.635	16.13	1.000	25.40	1.345	34.16	2.079	52.81
.137	3.48	.636	16.15	1.002	25.45	1.354	34.39	2.160	54.86
.138	3.51	.670	17.02	1.007	25.58	1.358	34.49		
.144	3.66	.696	17.68	1.010	25.45	1.375	34.93		
.168	4.27	.700	17.78	1.046	26.57	1.377	34.98		
.198	5.03	.705	17.91	1.062	26.97	1.380	35.05		
.204	5.18	.715	18.16	1.068	27.13	1.382	35.10		

(D)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are .005 (0.13 mm) for three place decimals and .01 (0.25 mm) for two place decimals and ±1 for all angles.
4. Rear accessory interchangeability dimensions shall be in accordance with MIL-C-83723.
5. The centerline of indicated projection must be located on vertical centerline within 2°.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

(D) For insert arrangements, see MIL-STD-1554 and table I.

TABLE II. Insert arrangements requiring reduced diameters for raised seal barriers on contact cavities as indicated.


Shell size	Insert arrangements	Contact cavities
8	(D) 03	1, 2, 3
10	(D) 06	1, 2, 3, 4, 5, 6

(D) For connector accessories, see MIL-C-85049.

This connector mates with MIL-C-83723/75 and MIL-C-83723/77.

"0" ring shall be furnished with connector.

(D) Part or Identifying Number (PIN) example:

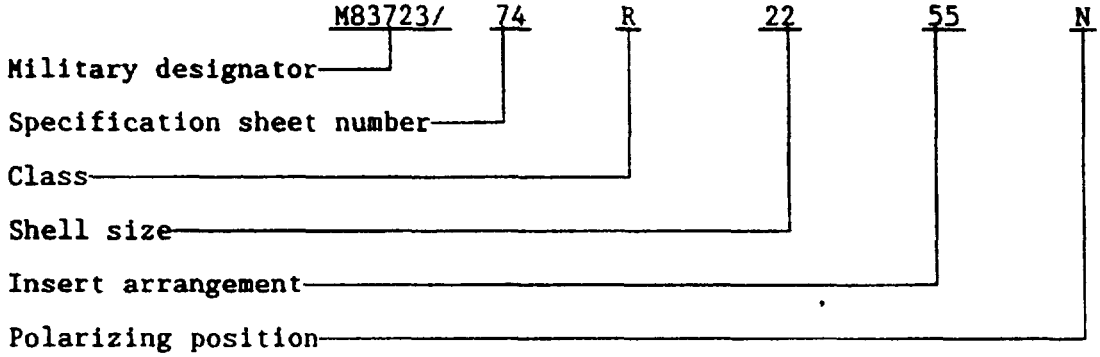

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, AV, MI
Navy - EC
Air Force - 11, 15, 99
DLA - ES

Preparing activity
Air Force - 85

Agent:
DLA - ES

(Project 5935-3728-07)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.