INCH-POUND

MIL-C-83723/79C

27 December 1991

SUPERSEDING

MIL-C-83723/79B

4 MARCH 1983

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE, (FLANGE MOUNT, BAYONET COUPLING, SOLDER PIN CONTACT), (SERIES III, CLASSES H AND Y)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

Ⓒ The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-83723.


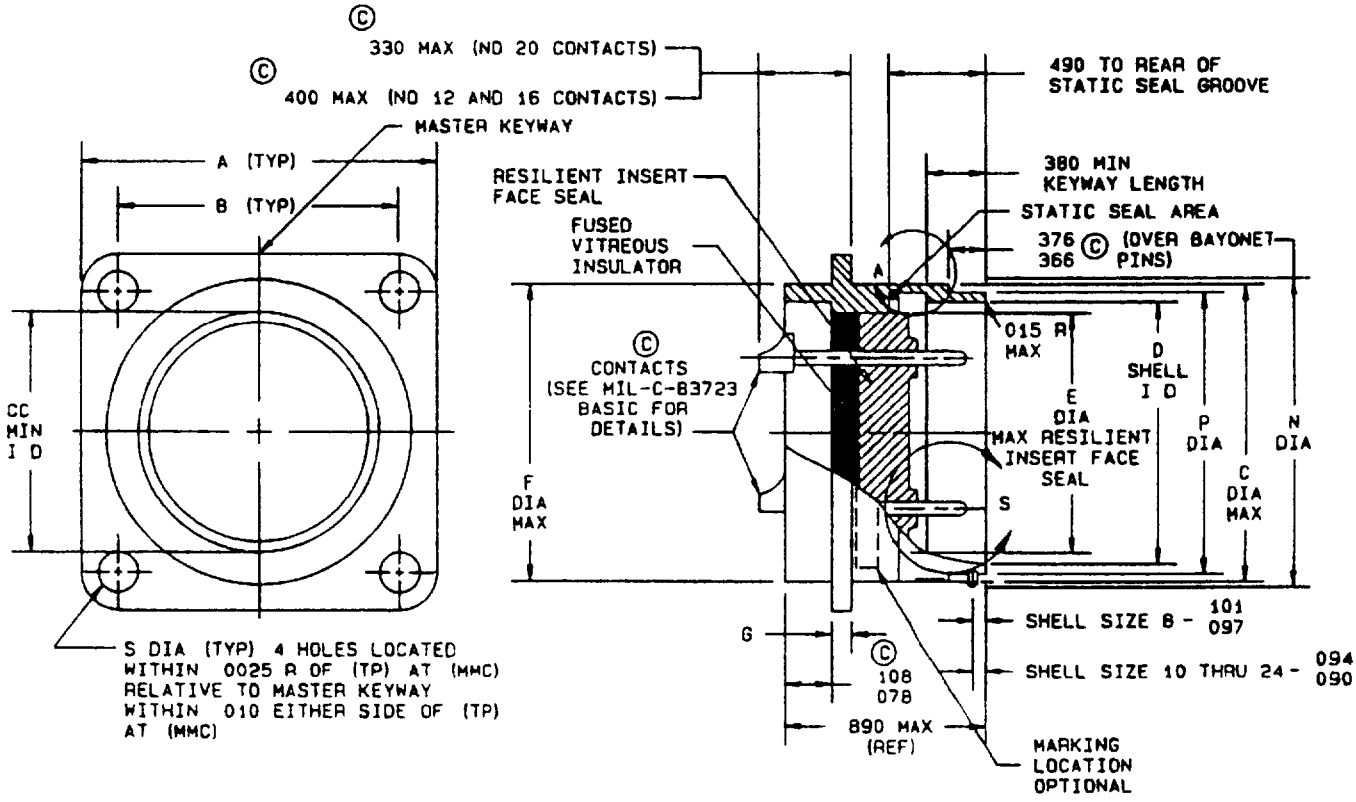


FIGURE 1. Dimensions and configuration.


Ⓒ denotes changes

DISTRIBUTION STATMENT A. Approved for public release; distribution is unlimted.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

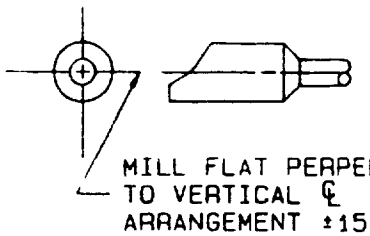


SOLDERPOT ORIENTATION

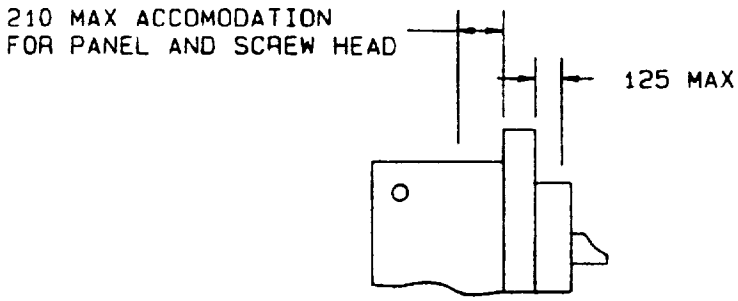

MAX PANEL THICKNESS (TYP)

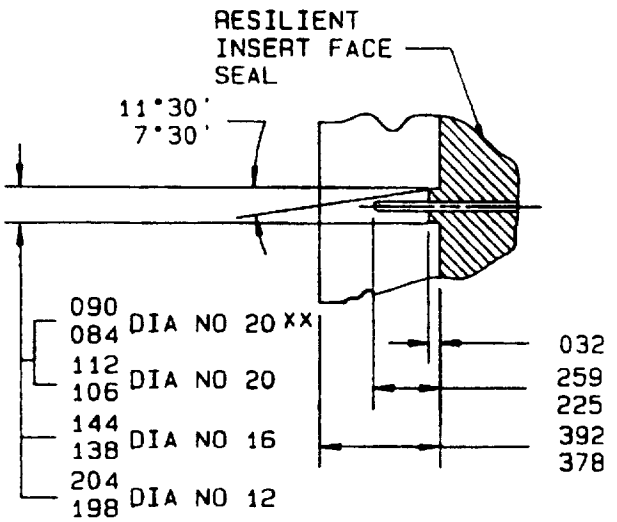

DETAIL S

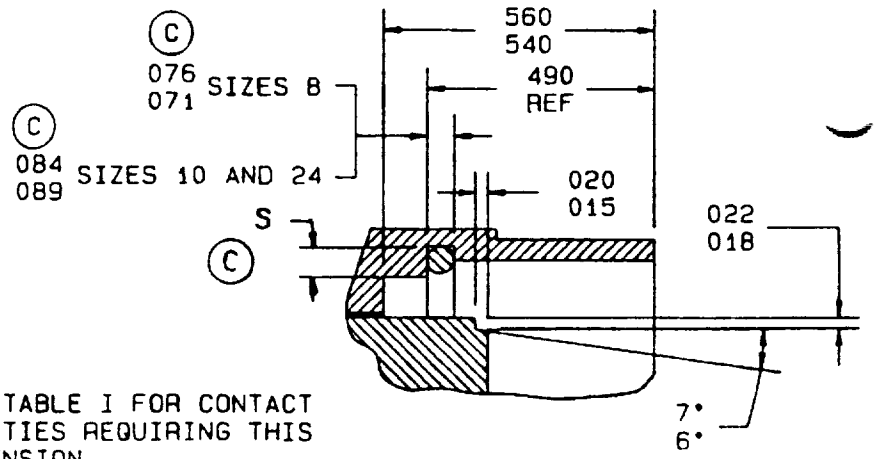

DETAIL A

xx SEE TABLE I FOR CONTACT CAVITIES REQUIRING THIS DIMENSION

FIGURE 1 Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

(C)

Shell size	A	B	C	D	E	F	G
8	.812	.594	.561	.428 .433	.312	.500	.072 .052
10	937	.719	.696	.530 .535	.388	.562	.072 .052
12	1.031	.812	.875	.700 .705	.558	.750	.072 .052
14	1.125	.906	.935	.769 .774	.627	.812	.072 .052
16	1.250	.969	1.062	.896 .901	.772	.937	.072 .052
18	1.343	1.062	1.187	1.002 1.007	.860	1.062	.072 .052
20	1.437	1.156	1.312	1.127 1.132	.985	1.187	.072 .052
22	1.562	1.250	1.437	1.252 1.257	1.110	1.312	.072 .052
24	1.703	1.375	1.562	1.377 1.382	1.235	1.437	.072 .052

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

Shell size	N	P	S +.005 -.000	PANEL CUTOUT FOR C DIA	PANEL CUTOUT FOR F DIA	CC
8	.620 .602	.536 .531	.508	.630 .620	.515 .505	.406
10	.748 .730	.659 .654	.636	.758 .748	.582 .572	.443
12	.918 .900	.829 .824	.806	.923 .913	.770 .760	.668
14	.988 .970	.898 .893	.875	.990 .980	.823 .822	.668
16	1.114 1.096	1.025 1.020	1.002	1.117 1.107	.958 .948	.763
18	1.220 1.202	1.131 1.126	1 108	1.219 1.209	1.082 1.072	.862
20	1.346 1.328	1.256 1.251	1.233	1.347 1.337	1.202 1.192	1.108
22	1.470 1.452	1.381 1.376	1.358	1.462 1.452	1.332 1.322	1.204
24	1.596 1.578	1.506 1.501	1.483	1.587 1.577	1.452 1.442	1.388

FIGURE 1. Dimensions and configuration - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
0025	0.065	.378	9.60	.700	17.78	.958	24.33	1.235	31.37
003	0 08	.380	9 65	705	17.92	.969	24.61	1.250	31.75
.004	0.10	.388	9.86	.719	18.26	.970	24.64	1.251	31.78
.005	0.13	.392	9.96	.730	18.54	.980	24.89	1.252	31.80
.010	0.25	.400	10.16	.748	19.00	.985	25.02	1.256	31.90
.015	0.38	.406	10.31	.750	19.05	.988	25.10	1.257	31.93
.018	0.48	.428	10.87	.758	19.25	.990	25.15	1.312	33.32
.020	0.51	.433	11.00	.760	19.30	1.002	25.45	1.322	33.58
.022	0.56	.443	11.25	.763	19.38	1.007	25.58	1.328	33.73
.032	0.81	.490	12.45	769	19.53	1.020	25.91	1.332	33.83
.052	1.32	500	12.70	.770	19.56	1.025	26.04	1.337	33.96
.071	1.80	505	12.83	.772	19.61	1.031	26.19	1.343	34.11
.072	1.83	508	12.90	.774	19.66	1.062	26.97	1.346	34.19
.076	1.93	.515	13.08	.806	20.47	1.072	27.23	1.347	34.21
.078	1.98	.530	13.46	.812	20.62	1.082	27.48	1.358	34.49
.084	2.13	.531	13.49	.822	20.88	1.096	27.96	1.375	34.93
.089	2.26	.535	13.51	.824	20.93	1.107	28.12	1.376	34.95
.090	2.29	.536	13.61	.829	21.06	1.108	28.14	1.377	34.98
.094	2.39	.540	13.72	.832	21.13	1.110	28.19	1.381	35.08
.097	2.46	.558	14.17	.860	21.84	1.114	28.30	1.382	35.10
.101	2.57	.560	14.22	.862	21.98	1.117	28.37	1.388	35.26
.106	2.69	.561	14.25	.875	22.23	1.125	28.58	1.437	36.50
.108	2.74	.562	14.27	.890	22.61	1.126	28.60	1.442	36.63
.112	2.84	.572	14.53	.893	22.68	1.127	28.63	1.452	36.88
.125	3.18	.582	14.78	.896	22.76	1.131	28.73	1.462	37.13
138	3.51	.594	15.09	.898	22.81	1.132	28.75	1.470	37.34
.144	3.66	.602	15.29	.900	22.86	1.156	29.36	1.483	37.67
.198	5.03	.620	15.75	.901	22.89	1.187	30.15	1.501	38.13
.204	5.18	.627	15.93	.906	23.01	1.192	30.28	1.506	38.25
.225	5.72	.630	16.00	.913	23.19	1.202	30.53	1.562	39.67
.259	6.58	.636	16.15	.918	23.32	1.204	30.58	1.577	40.06
.312	7.92	.654	16 61	.923	23.44	1.209	30.71	1.578	40.08
.330	8.38	659	16.74	.935	23.75	1.219	30.96	1.587	40.31
.366	9.30	.668	16.97	.937	23.80	1.220	30.99	1.596	40.54
.376	9.55	.696	17.68	.948	24.08	1.233	31.32	1.703	43.26

(C)

NOTES:

1. Metric equivalents are given for general information only.
2. Dimensions are in inches.
3. Unless otherwise specified, tolerances are .005 (0.13 mm) for three place decimals and .01 (0.25 mm) for two place decimals and ±1 for all angles.
4. Notes 5 through 10 applicable to contacts only.
5. Dimensions apply after plating.
6. 63 all over in accordance with ANSI 46.1-62 unless otherwise specified.
7. Remove all burrs and sharp edges .003 to .005 R.
8. Diameters to be concentric within .004 TIR.
9. Diameter in the same cross-sectional plane to be concentric with each other within .003 TIR.
10. The centerline of indicated projection must be located on vertical centerline within 2 degrees.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

TABLE I Insert arrangements requiring reduced diameters for raised seal barriers on contact cavities as indicated.

Shell size	Insert arrangements	Contact cavities
8	© 03	1, 2, and 3
10	© 06	1, 2, 3, 4, 5, 6


REQUIREMENTS:

Dimensions and configuration: See figure 1

This connector mates with MIL-C-83723/75 and 77.

© For insert arrangements, see MIL-STD-1554 and table I.

© Part or Identifying Number (PIN) example:

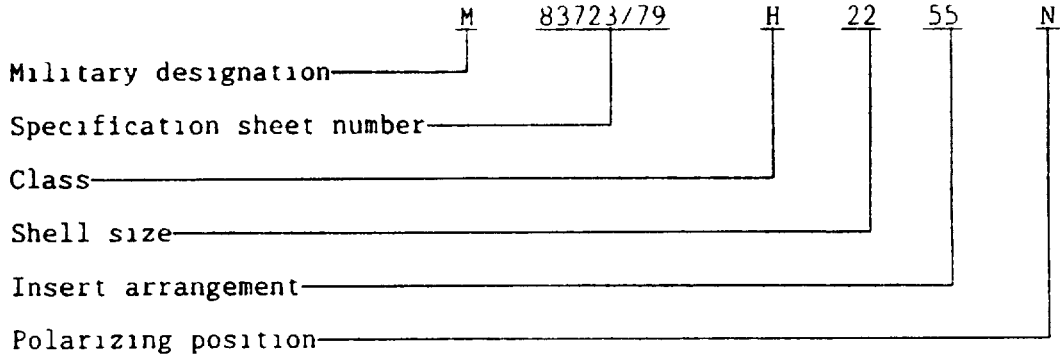

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities.
Army - AR, MI
Navy - EC
Air Force - 11, 15, 17, 99
DLA - ES

Preparing activity
Air Force - 85

Agent:
DLA -ES

(Project 5935-3728-12)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.