MILITARY SPECIFICATION SHEET


BATTERY, RECHARGEABLE, SEALED NICKEL CADMIUM BB-416/U

This specification sheet is approved for use by the Electronic Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the sealed nickel cadmium rechargeable battery type described herein shall consist of this document and the latest issue of Specification MIL-B-55130(ER).

INCHES	MM
.031	.787
.063	1.600
.125	3.175
.250	6.360
.500	12.700
.718	18.237
1.000	25.400
1.937	49.200

NOTE: All dimensions in inches

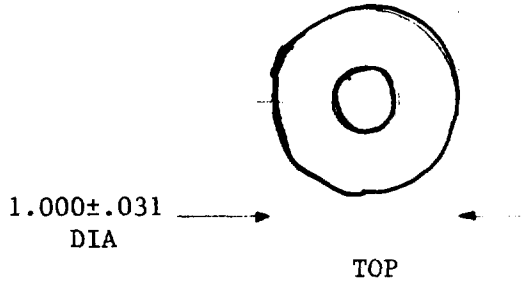

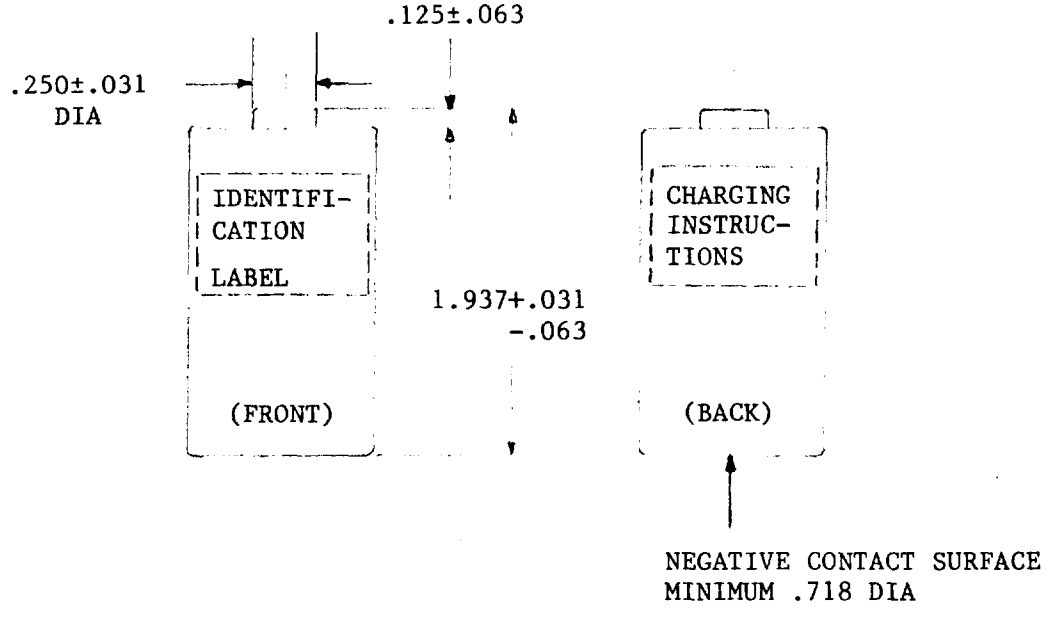


Figure 1. Dimensions of BB-416/U

FSC 6140

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:27Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Nomenclature:	BB-416/U
Rated capacity (5 hour rate - C_5):	1.8 AH
Voltage (Nominal):	1.2 volts
Weight (Maximum):	.085 kg (.188 lb)
Charge rate for testing and on battery (0.2 C_5 for 6 to 7 hours):	.36 amps
Commercial battery size:	C

Discharge rates (see 6.4.2.1)	Five second voltage (V)	Final Voltage (V)	Current (amps)
0.25 C_5	--	1.00	0.45
0.20 C_5	--	1.00	0.36
3.00 C_5	1.1	1.00	5.40

Test	Discharge rates	Capacity Requirement (AH)
Full capacity discharge	0.2 C_5	1.80
Cycle life, 392 cycles	0.2 C_5	1.44
Overcharge 1/	0.2 C_5	1.80
High rate discharge	3.0 C_5	1.08
Low temperature discharge at -22°F (-30°C):	0.2 C_5	0.72
Retention of charge 7 days @ 120°F (49°C):	0.2 C_5	0.90
High temperature performance	0.2 C_5	0.90
Vibration	0.2 C_5	1.8

1/ 24 hours of charge at a 0.2 C_5 rate

CUSTODIAN:
ARMY-ER
REVIEWER:

PREPARING ACTIVITY:
ARMY-ER
(PROJECT 6140-A586-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:27Z
Check the source to verify that this is the current version before use.