
INCH-POUND
MIL-DTL-55302/98D
17 November 2004
SUPERSEDING
MIL-C-55302/98C(CR)
12 January 1981

DETAIL SPECIFICATION SHEET

# CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: CONTACT, WRAPPOST REMOVABLE TYPE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-55302.

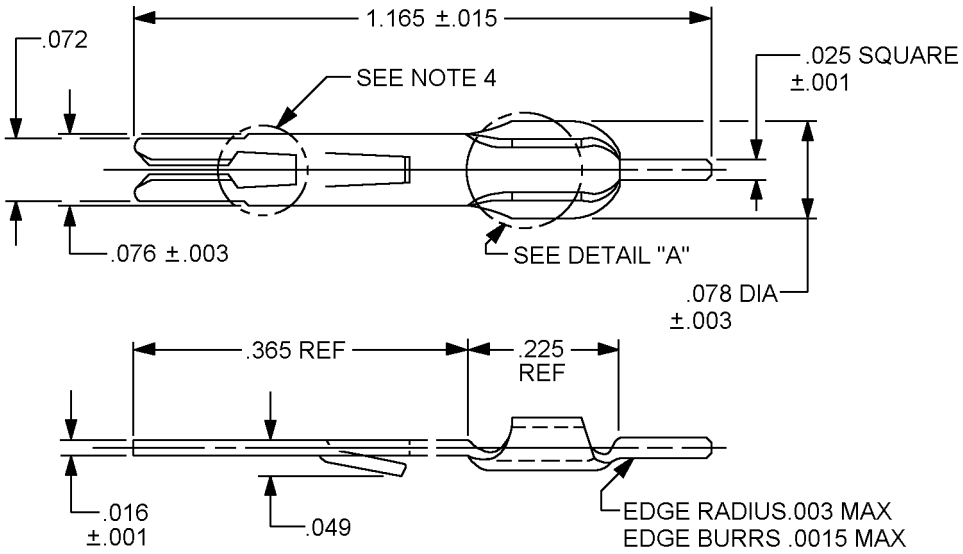



| Inches | mm |
|---|---|
| .001 | 0.03 |
| .0015 | 0.038 |
| .003 | 0.08 |
| .015 | 0.38 |
| .016 | 0.41 |
| .025 | 0.64 |
| .049 | 1.24 |
| .072 | 1.83 |
| .076 | 1.93 |
| .078 | 1.98 |
| .225 | 5.72 |
| .365 | 9.27 |
| 1.165 | 29.59 |

FIGURE 1. Contact, hermaphroditic, wrappost removable.




Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

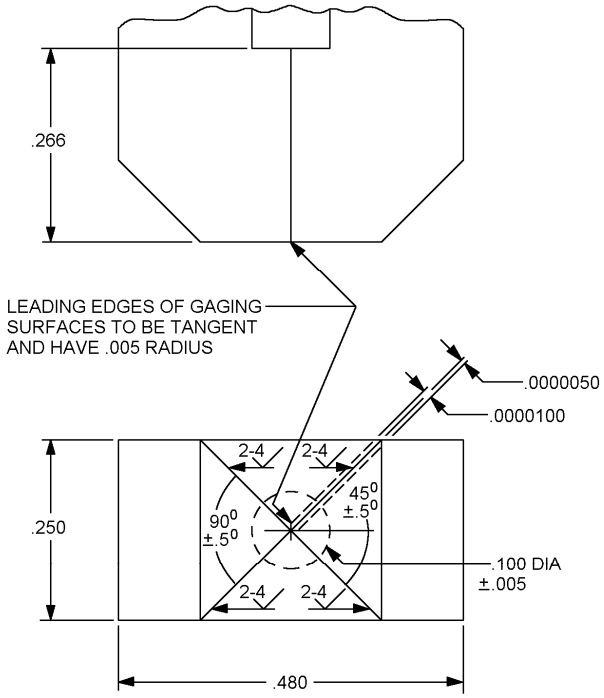


MATERIAL: MEDIUM ALLOY STEEL BONDED TITANIUM CARBIDE, ROCKWELL-C-67-69

CONFIGURATION "A" TEST GAGE

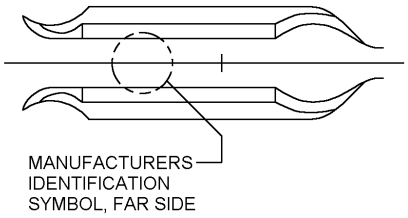


| Inches | mm |
|---|---|
| .0000050 | 0.000127 |
| .0000100 | 0.000254 |
| .005 | 0.13 |
| .100 | 2.54 |
| .250 | 6.35 |
| .266 | 6.79 |
| .480 | 12.19 |

Detail A

Manufacturer's identification symbol shall be imprinted approximately as shown.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified tolerances shall be ± .005 (0.13 mm). All dimensions are for parts after plating.
4. Contact relief hole configuration, optional.
5. Contact insertion and removal tool M81969/5-01 and M81969/4-02.

FIGURE 1. Contact, hermaphroditic, wrappost removable - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configurations: See figure 1.

Material: Phosphor bronze in accordance with ASTM B139, composition A.

Plating: The contact plating shall be gold in accordance with ASTM B488, type II, code D, class 1.27, over nickel plating in accordance with SAE-AMS-QQ-N-290, class 2, 30 to 150 microinches.

Contact separating force: See configuration A:

Polished steel gage from unplated contacts: 1 ounce minimum.

Plated gold over nickel contacts (contact to contact): 2 to 10 ounces.

Current rating, maximum: 3 amperes, 24 AWG wire.

Wire size: For .025 square wrappost, wire sizes 24, 26, 28 and 30 are recommended.

Identification of contact:

Contacts shall be permanently imprinted with manufacturer's symbol for purpose of identifying manufacturer's product (see detail A).

Application: Contact, hermaphroditic, crimp removable for wire (stranded), are to be used with connectors MIL-DTL-55302/95, MIL-DTL-55302/96, and MIL-DTL-55302/99.

Part or Identifying Number (PIN): M55302/98-01.

Wrappost shall be tested in accordance with the applicable connector specification sheet.

Referenced documents. In addition to MIL-DTL-55302, this document references the following:

| | |
|---|---|
| MIL-DTL-55302/95 | ASTM B139 |
| MIL-DTL-55302/96 | ASTM B488 |
| MIL-DTL-55302/99 | SAE-AMS-QQ-N-290 |

Previous changes. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – CR
DLA – CC

Preparing activity:
DLA - CC

(Project 5935-4440-017)

Review activities:
Army – AR, AT, AV, CR4, MI

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.