
MILITARY SPECIFICATION SHEET

TERMINALS, STUD (INSULATED),

STYLE SE09

The complete requirements for procuring the terminals described herein shall consist of this document and the latest issue of Specification MIL-T-55155.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

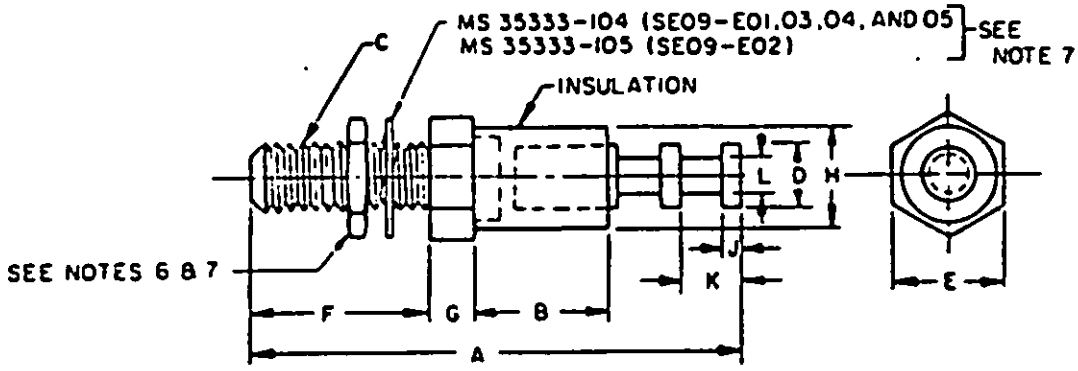

Type designation	Dimensions										
	A	B	C (UNC-2A)	D	E	F	G	H	J	K	L
SE09-E01	.750	.230	No. 4-40	.066	.156	.250	.128	.125	.018	.049	.045
SE09-E02	.890	.156	No. 6-32	.140	.250		.160	.245	.025	.125	.069
SE09-E03	.688	.200	No. 4-40	.090		.188	.060	.219	.020	.110	.050
SE09-E04	.750					.250					
SE09-E05	.875					.325					

NOTES:

1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Tolerance is ±.015(.38 mm).
4. Drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes.
5. Dash in type designation allows for different insulation colors in accordance with MIL-T-55155.
6. Hex nut, brass, No. 4-40 UNC-2B X .09(2.29 mm) thick X .25 (6.35 mm) across flats (SE09-E01, 03, 04, and 05); hex nut, brass, No. 6-32 UNC-2B X .11(2.79 mm) thick X .31(7.87 mm) across flats (SE09-E02).
7. The washer and the hex nut shall be plated with same finish as that on the mounting base.

INCHES	MM	INCHES	MM
.018	.46	.156	3.96
.020	.51	.180	4.57
.025	.64	.188	4.78
.045	1.14	.200	5.08
.049	1.24	.219	5.56
.050	1.27	.230	5.84
.060	1.52	.245	6.22
.066	1.68	.250	6.35
.069	1.75	.375	9.53
.090	2.29	.688	17.48
.110	2.79	.750	19.05
.125	3.18	.875	22.23
.128	3.25	.890	22.61
.140	3.56		

FSC 5940

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:30Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.

Insulation material: SE09-E01 & 02 - Polytetrafluoroethylene
SE09-E03, 04, & 05 - Diallyl phthalate

Dielectric withstanding voltage:

Type designation	Pressure	Volts ac (rms) (min)
SE09-E01	Atmospheric Reduced barometric	3,500 1,450
SE09-E02	Atmospheric Reduced barometric	3,300 1,400
SE09-E03, 04, & 05	Atmospheric Reduced barometric	3,500 1,400

Pull: SE09-E01, 03, 04, & 05 - - - 10 pounds, min.
SE09-E02 - - - - - - - - - - - - 15 pounds, min.

Torque: SE09-E01 - - - - - - - - - 1.5 ounce-inches, min.
SE09-E02, 03, 04, & 05- - 3.0 ounce-inches, min.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - MI, MU, SL, WC
Navy -
Air Force - 11, 80
DSA - GS

User activities:
Army - AT, AV, ME
Navy - AS, MC, OS, SH, YD
Air Force -

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5940-G[illegible])

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:30Z
Check the source to verify that this is the current version before use.