DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies or for use in new designs not later than 6 months after the latest date of approval shown.

NOTICE: When Government drawings, specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

FED. SUP CLASS.
5306

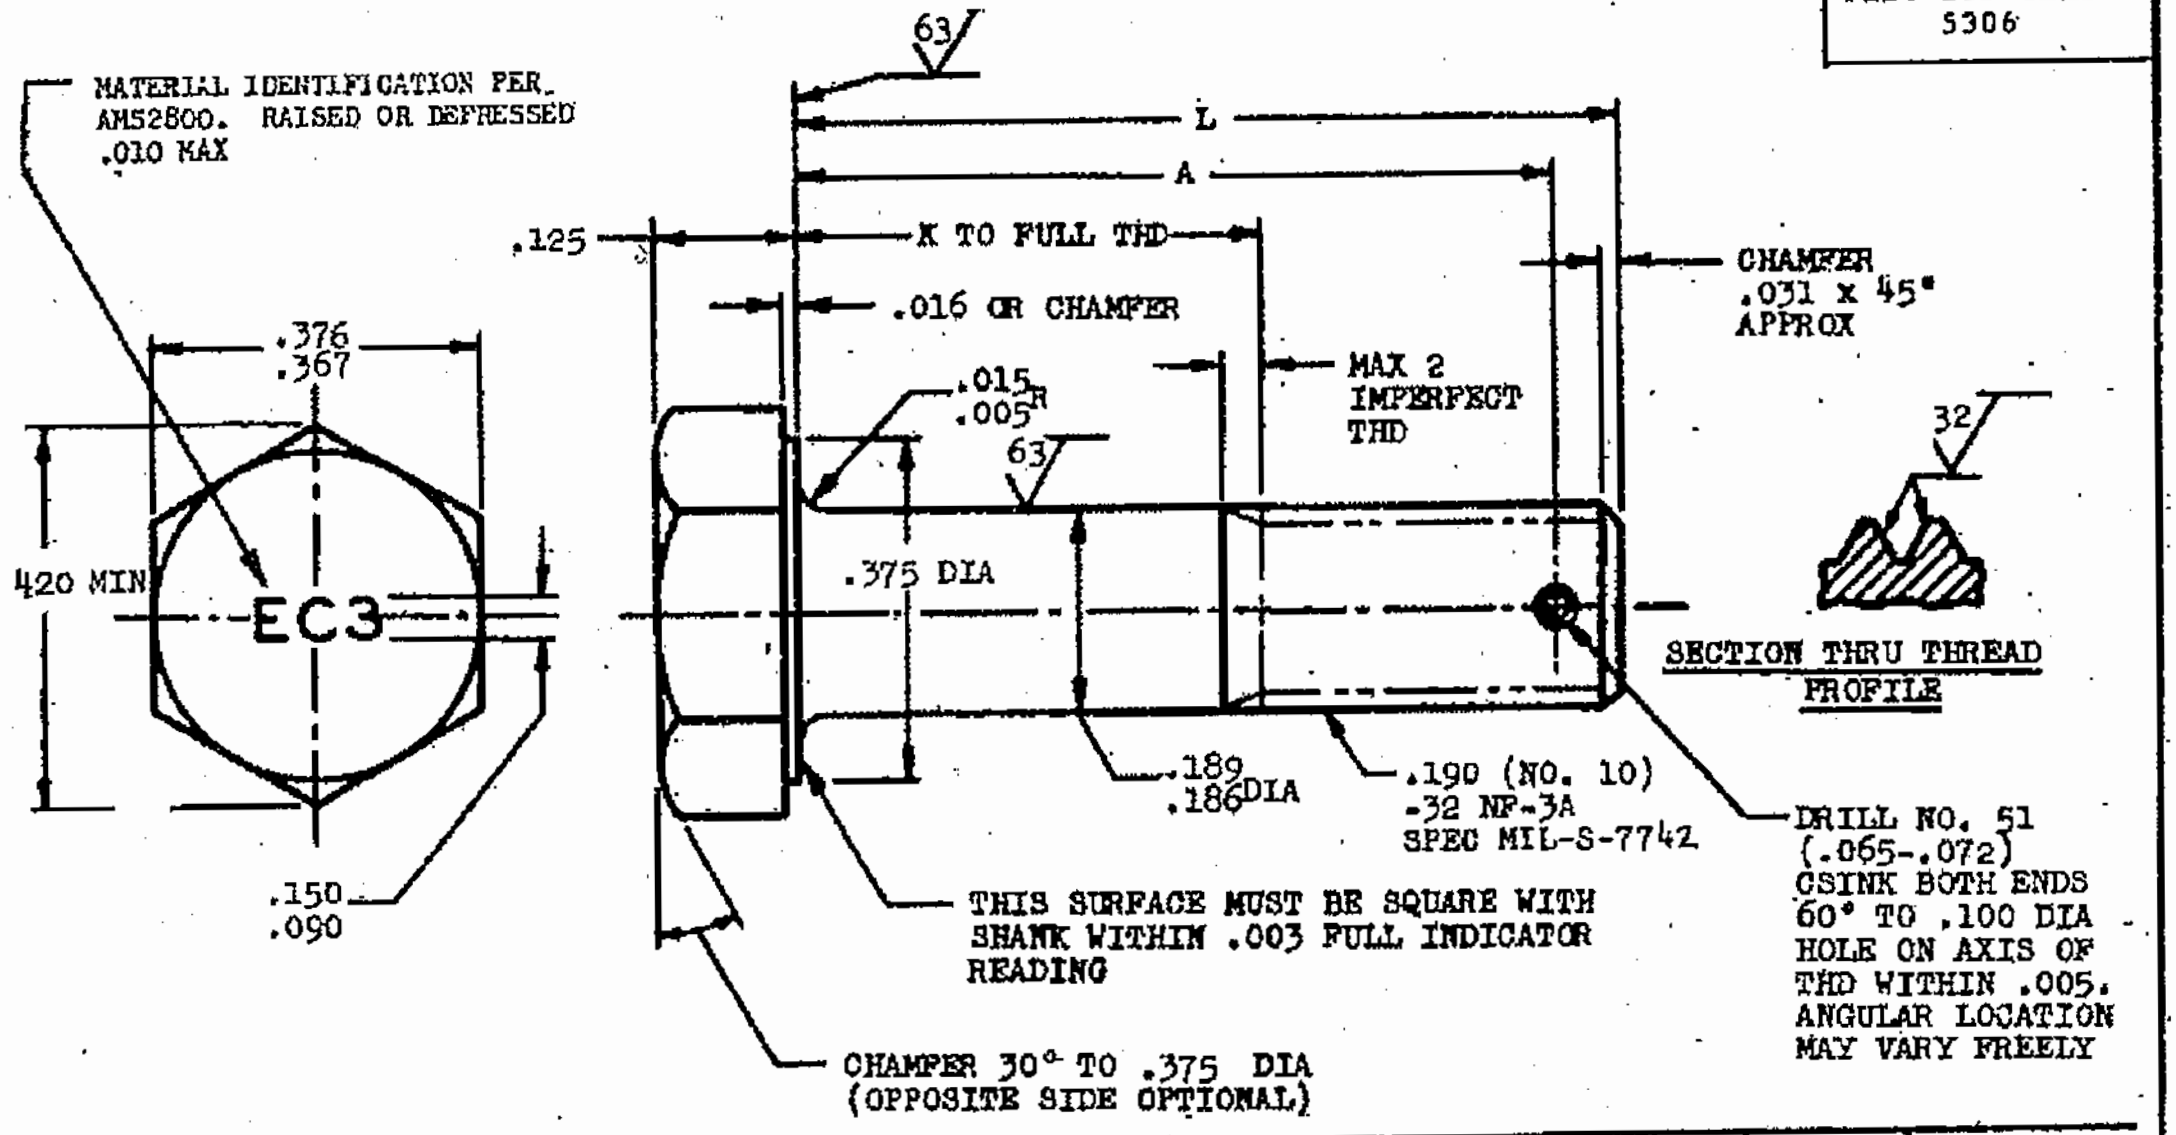
MATERIAL IDENTIFICATION PER AMS2800. RAISED OR DEPRESSED .010 MAX
.376
.367
420 MIN
EC3
.150
.090
63
L
A
.125
K TO FULL THD
.016 OR CHAMFER
CHAMFER .031 x 45° APPROX
MAX 2 IMPERFECT THD
.015 R
.005
63
.375 DIA
32
SECTION THRU THREAD PROFILE
.189
.186 DIA
.190 (NO. 10) -32 NF-3A SPEC MIL-S-7742
DRILL NO. 51 (.065-.072) CSINK BOTH ENDS 60° TO .100 DIA HOLE ON AXIS OF THD WITHIN .005. ANGULAR LOCATION MAY VARY FREELY
THIS SURFACE MUST BE SQUARE WITH SHANK WITHIN .003 FULL INDICATOR READING
CHAMFER 30° TO .375 DIA (OPPOSITE SIDE OPTIONAL)

L	A	K +.000 -.060	PART NO.	L	A	K +.000 -.060	PART NO.	L	A	K +.000 -.060	PART NO.
				1.250	1.140	.688	AN105520	3.625	3.515	3.062	AN105541
				1.312	1.202	.750	AN105521	3.750	3.640	3.188	AN105542
				1.375	1.265	.812	AN105522	3.875	3.765	3.312	AN105543
				1.438	1.328	.875	AN105523				
				1.500	1.390	.938	AN105524				
				1.625	1.515	1.062	AN105525				
				1.750	1.640	1.188	AN105526				
.375	.265	(a)	AN105506	1.875	1.765	1.312	AN105527				
.438	.328	(a)	AN105507	2.000	1.890	1.438	AN105528				
.500	.390	(a)	AN105508	2.125	2.015	1.562	AN105529				
.562	.452	(a)	AN105509	2.250	2.140	1.688	AN105530				
.625	.515	(a)	AN105510	2.375	2.265	1.812	AN105531				
.688	.578	.125	AN105511	2.500	2.390	1.938	AN105532				
.750	.640	.188	AN105512	2.625	2.515	2.062	AN105533				
.812	.702	.250	AN105513	2.750	2.640	2.188	AN105534				
.875	.765	.312	AN105514	2.875	2.765	2.312	AN105535				
.938	.828	.375	AN105515	3.000	2.890	2.438	AN105536				
1.000	.890	.438	AN105516	3.125	3.015	2.562	AN105537				
1.062	.952	.500	AN105517	3.250	3.140	2.688	AN105538				
1.125	1.015	.562	AN105518	3.375	3.265	2.812	AN105539				
1.188	1.078	.625	AN105519	3.500	3.390	2.938	AN105540				

(a) THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS.

NOTE:
(1) SHANK SHALL BE STRAIGHT WITHIN .004 FIR. PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .011 FIR.

INACTIVE FOR DESIGN AFTER 27 DEC 1966 NO SUPERSEDING STANDARD.

MATERIAL: CORROSION RESISTANT STEEL - SEE MANUFACTURING SPECIFICATION
SURFACE ROUGHNESS: AS1Q7
MANUFACTURING SPECIFICATION: AMS 7472
③ INSPECTION: ALL PARTS SHALL UNDERGO FLUORESCENT PENETRANT INSPECTION IN ACCORDANCE WITH AMS2645.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.
DO NOT USE UNASSIGNED PART NUMBERS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 18 Jul 49 REVISED ① 31 Aug 54 ② 27 Dec 66 ③ 30 June 1986

P.A.
USAF - 11
Other Cust
Navy - AS
Army - AV

AIR FORCE-NAVY AERONAUTICAL STANDARD

BOLT - CRES HEX HEAD, DRILLED SHANK, .190-32

AN105501 THRU AN105600

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:25Z
Check the source to verify that this is the current version before use.

Project No. 5306-1039

*U.S. GOVERNMENT PRINTING OFFICE: 1967-251-516/3617