FED. SUP CLASS.
5306

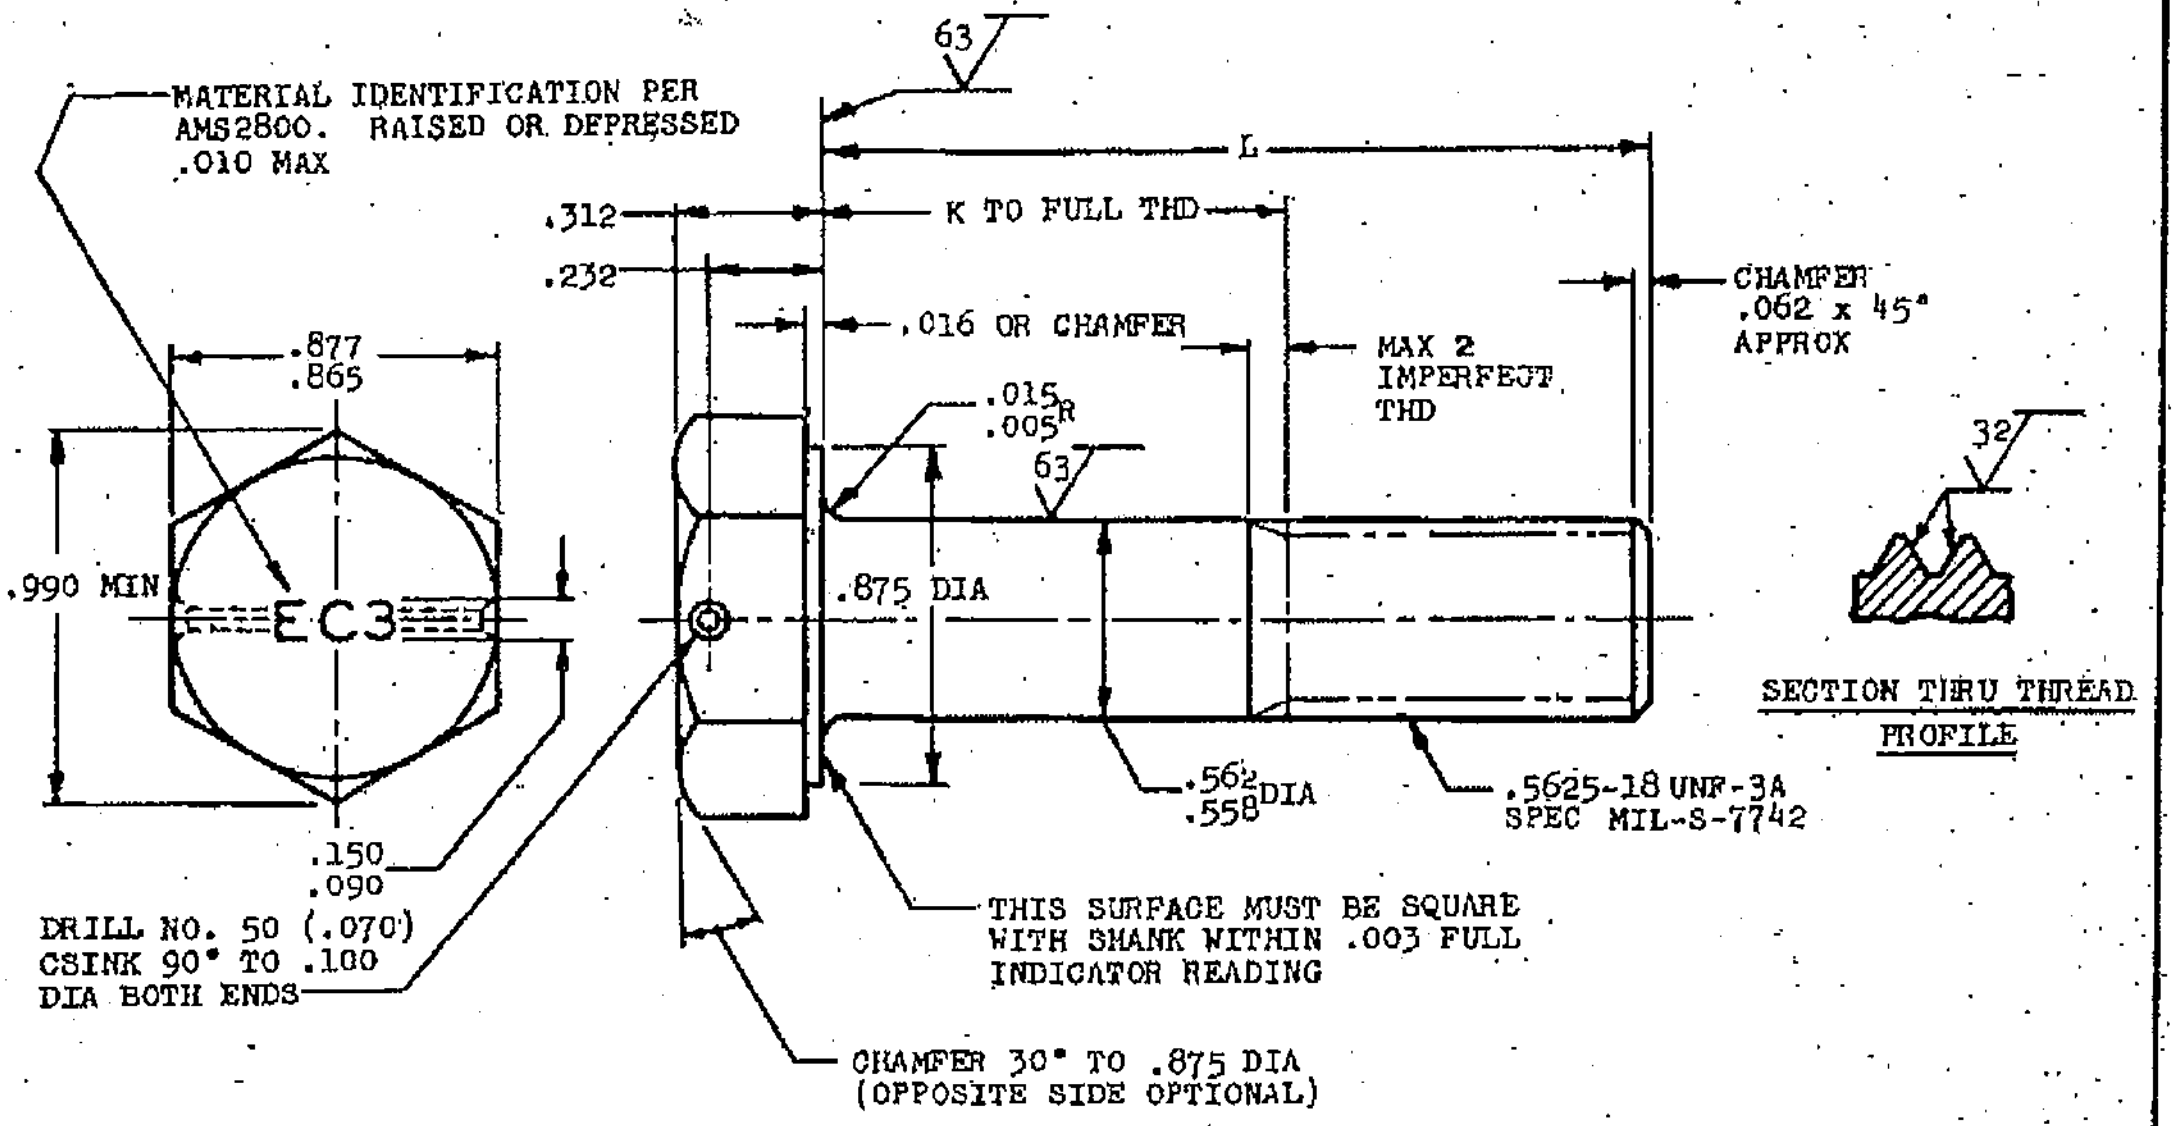
63
MATERIAL IDENTIFICATION PER AMS2800. RAISED OR DEPRESSED .010 MAX
L
.312
K TO FULL THD
.232
.016 OR CHAMFER
CHAMFER .062 x 45° APPROX
MAX 2 IMPERFECT THD
.877
.865
.015
.005 R
63
32
.990 MIN
EC3
.875 DIA
SECTION THRU THREAD PROFILE
.562
.558 DIA
.5625-18 UNF-3A SPEC MIL-S-7742
.150
.090
DRILL NO. 50 (.070) CSINK 90° TO .100 DIA BOTH ENDS
THIS SURFACE MUST BE SQUARE WITH SHANK WITHIN .003 FULL INDICATOR READING
CHAMFER 30° TO .875 DIA (OPPOSITE SIDE OPTIONAL)

L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.
			1.812	.438	AN107017	3.000	1.625	AN107031	4.750	3.375	AN107045
			1.875	.500	AN107018	3.125	1.750	AN107032	4.875	3.500	AN107046
			1.938	.562	AN107019	3.250	1.875	AN107033	5.000	3.625	AN107047
1.125	(a)	AN107006	2.000	.625	AN107020	3.375	2.000	AN107034	5.125	3.750	AN107048
1.188	(a)	AN107007	2.062	.688	AN107021	3.500	2.125	AN107035	5.250	3.875	AN107049
1.250	(a)	AN107008	2.125	.750	AN107022	3.625	2.250	AN107036	5.375	4.000	AN107050
1.312	(a)	AN107009	2.188	.812	AN107023	3.750	2.375	AN107037	5.500	4.125	AN107051
1.375	(a)	AN107010	2.250	.875	AN107024	3.875	2.500	AN107038	5.625	4.250	AN107052
1.438	(a)	AN107011	2.312	.938	AN107025	4.000	2.625	AN107039	5.750	4.375	AN107053
1.500	(a)	AN107012	2.375	1.000	AN107026	4.125	2.750	AN107040	5.875	4.500	AN107054
1.562	(a)	AN107013	2.500	1.125	AN107027	4.250	2.875	AN107041	6.000	4.625	AN107055
1.625	.250	AN107014	2.625	1.250	AN107028	4.375	3.000	AN107042			
1.688	.312	AN107015	2.750	1.375	AN107029	4.500	3.125	AN107043			
1.750	.375	AN107016	2.875	1.500	AN107030	4.625	3.250	AN107044			

(a) THREAD TO HEAD, MAXIMUM TWO IMPERFECT THREADS.

NOTE: (1) SHANK SHALL BE STRAIGHT WITHIN .002 FIR. PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .026 FIR.

INACTIVE FOR DESIGN AFTER 27 DEC 1966 NO SUPERSEDING STANDARD.

MATERIAL: CORROSION RESISTANT STEEL - SEE MANUFACTURING SPECIFICATION
SURFACE ROUGHNESS: AS107
MANUFACTURING SPECIFICATION: AMS 7472
③ INSPECTION: ALL PARTS SHALL UNDERGO FLUORESCENT PENETRANT INSPECTION IN ACCORDANCE WITH AMS2645.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.
DO NOT USE UNASSIGNED PART NUMBERS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 18 Jul 49
REVISED ① 31 Aug 54 ② 27 Dec 66 ③ 30 June 1986

P.A. USAF - 11 Other Cust Navy - AS Army - AV	**AIR FORCE-NAVY AERONAUTICAL STANDARD** BOLT - CRES DRILLED HEX HEAD, 1 HOLE, .5625-18	**AN107001** THRU **AN107100**

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies or for use in new designs not later than 6 months after the latest date of approval shown.

U.S. GOVERNMENT PRINTING OFFICE: 1967-353-615/3117

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:25Z
Check the source to verify that this is the current version before use.