
AN149251 THRU AN149350

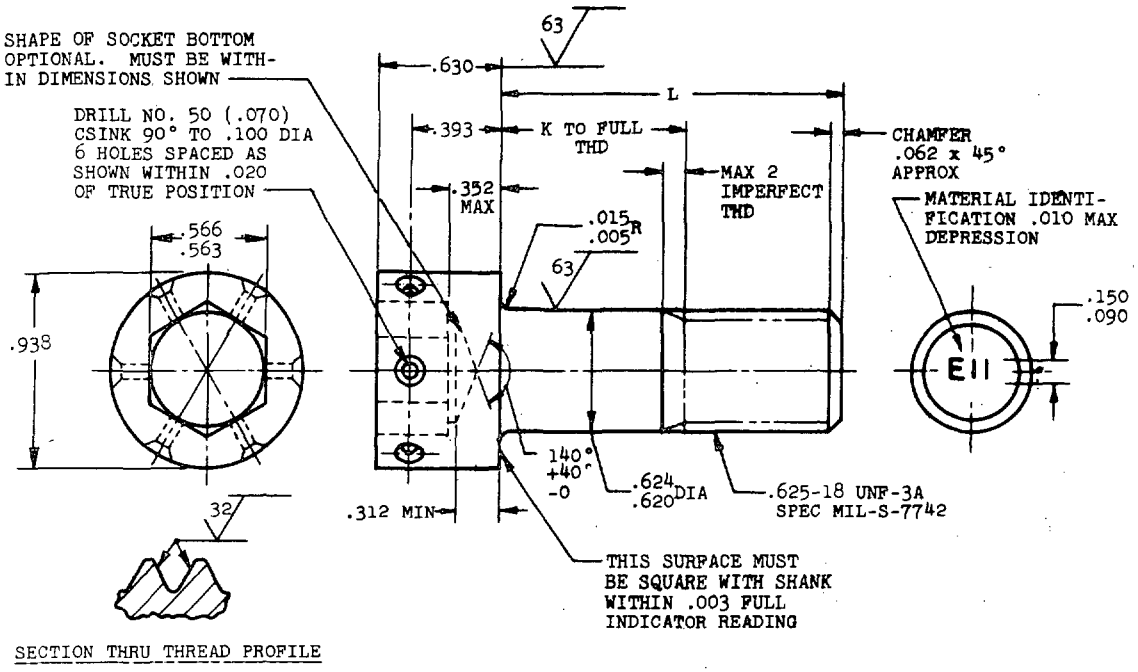

SECTION THRU THREAD PROFILE

L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.
			1.938	.438	AN149279	3.125	1.625	AN149293	4.875	3.375	AN149307
			2.000	.500	AN149280	3.250	1.750	AN149294	5.000	3.500	AN149308
			2.062	.562	AN149281	3.375	1.875	AN149295	5.125	3.625	AN149309
1.250	(a)	AN149268	2.125	.625	AN149282	3.500	2.000	AN149296	5.250	3.750	AN149310
1.312	(a)	AN149269	2.188	.688	AN149283	3.625	2.125	AN149297	5.375	3.875	AN149311
1.375	(a)	AN149270	2.250	.750	AN149284	3.750	2.250	AN149298	5.500	4.000	AN149312
1.438	(a)	AN149271	2.312	.812	AN149285	3.875	2.375	AN149299	5.625	4.125	AN149313
1.500	(a)	AN149272	2.375	.875	AN149286	4.000	2.500	AN149300	5.750	4.250	AN149314
1.562	(a)	AN149273	2.438	.938	AN149287	4.125	2.625	AN149301	5.875	4.375	AN149315
1.625	(a)	AN149274	2.500	1.000	AN149288	4.250	2.750	AN149302	6.000	4.500	AN149316
1.688	.188	AN149275	2.625	1.125	AN149289	4.375	2.875	AN149303			
1.750	.250	AN149276	2.750	1.250	AN149290	4.500	3.000	AN149304			
1.812	.312	AN149277	2.875	1.375	AN149291	4.625	3.125	AN149305			
1.875	.375	AN149278	3.000	1.500	AN149292	4.750	3.250	AN149306			

(a) THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS.

NOTE: (1) THE RUNOUT FOR STRAIGHTNESS OF SHANK SHALL NOT EXCEED .002 FIR PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE HEXAGON SOCKET IN RELATION TO OD OF HEAD SHALL BE WITHIN .005 FIR.
(4) THE CONCENTRICITY OF THE SHANK IN RELATION TO OD OF HEAD SHALL BE WITHIN .005 FIR.

MATERIAL: STEEL AMS 6322

HARDNESS: ROCKWELL C32-36

FINISH: CADMIUM PLATE AMS 2400

SURFACE ROUGHNESS: AS107

MANUFACTURING SPECIFICATION: AMS 7452 PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.

BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

DO NOT USE UNASSIGNED PART NUMBERS.

② INACTIVE FOR DESIGN AFTER 1 JAN 1960 NO SUPERSEDING MS STANDARD

For definition and application of drawing status notes, see ANA Bulletin No. 337.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 30 Jun 49 REVISED ① 7 Jan 53 ② 1 Aug 58

PROCUREMENT SPECIFICATION

AIR FORCE-NAVY AERONAUTICAL STANDARD

BOLT-SOCKET HEAD, 6 HOLES DRILLED, .625-18

AN149251 THRU AN149350

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTICE: This drawing was approved by joint action of the Air Force-Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, as for use in new design, not later than 6 months after the latest date of approval above.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:27Z
Check the source to verify that this is the current version before use.