
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AN158601 THRU AN158900

FSC 5307

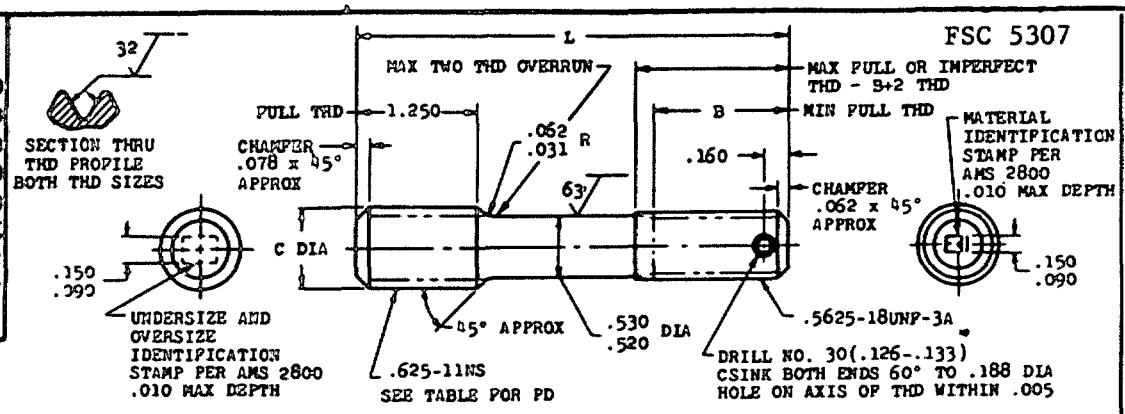

UNDERSIZE AND OVERSIZE IDENTIFICATION		-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C		.620- .625	.620- .625	.620- .625	.620- .625	.629- .634	.629- .634
PD BEFORE PLATING		.5682-.5692	.5712-.5722	.5742-.5752	.5772-.5782	.5802-.5812	.5832-.5842
PD AFTER PLATING		.5687-.5702	.5717-.5732	.5747-.5762	.5777-.5792	.5807-.5822	.5837-.5852
PD LEAD THREAD		.5610-.5630	.5640-.5660	.5670-.5690	.5700-.5720	.5730-.5750	.5760-.5780
L	B	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
2.188	.812	AN158619	AN158620	AN158621	AN158622	AN158623	AN158624
2.250	.875	AN158625	AN158626	AN158627	AN158628	AN158629	AN158630
2.312	.938	AN158631	AN158632	AN158633	AN158634	AN158635	AN158636
2.375	1.000	AN158637	AN158638	AN158639	AN158640	AN158641	AN158642
2.438	1.000	AN158643	AN158644	AN158645	AN158646	AN158647	AN158648

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.

MATERIAL: STEEL AMS 6322 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

DO NOT USE UNASSIGNED PART NUMBERS.

(4) CANCELED AS OF 9 OCT 87

(2) INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD.

THIS STANDARD HAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 17 May 50 REVISED (1) 25 Mar 55 (2) 26 Oct 72 (4) 9 OCT 87

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all conflicting standard drawings for the same product and shall become effective for the procurement of new(initial) supplies, or for use in new designs, not later than 6 months after the latest date of approval above.

1. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN158601 THRU AN158900
NONE	STUD-STEPPED, DRILLED, 2 DIA ENGAGEMENT, .625-11 x .5625-18	

E-25-121

Project 5307-0392

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.