FSC 5307

DISTRIBUTION STATEMENT A. Approved for public rélease; distribution is unlimited.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

AN167301
THRU
AN167600

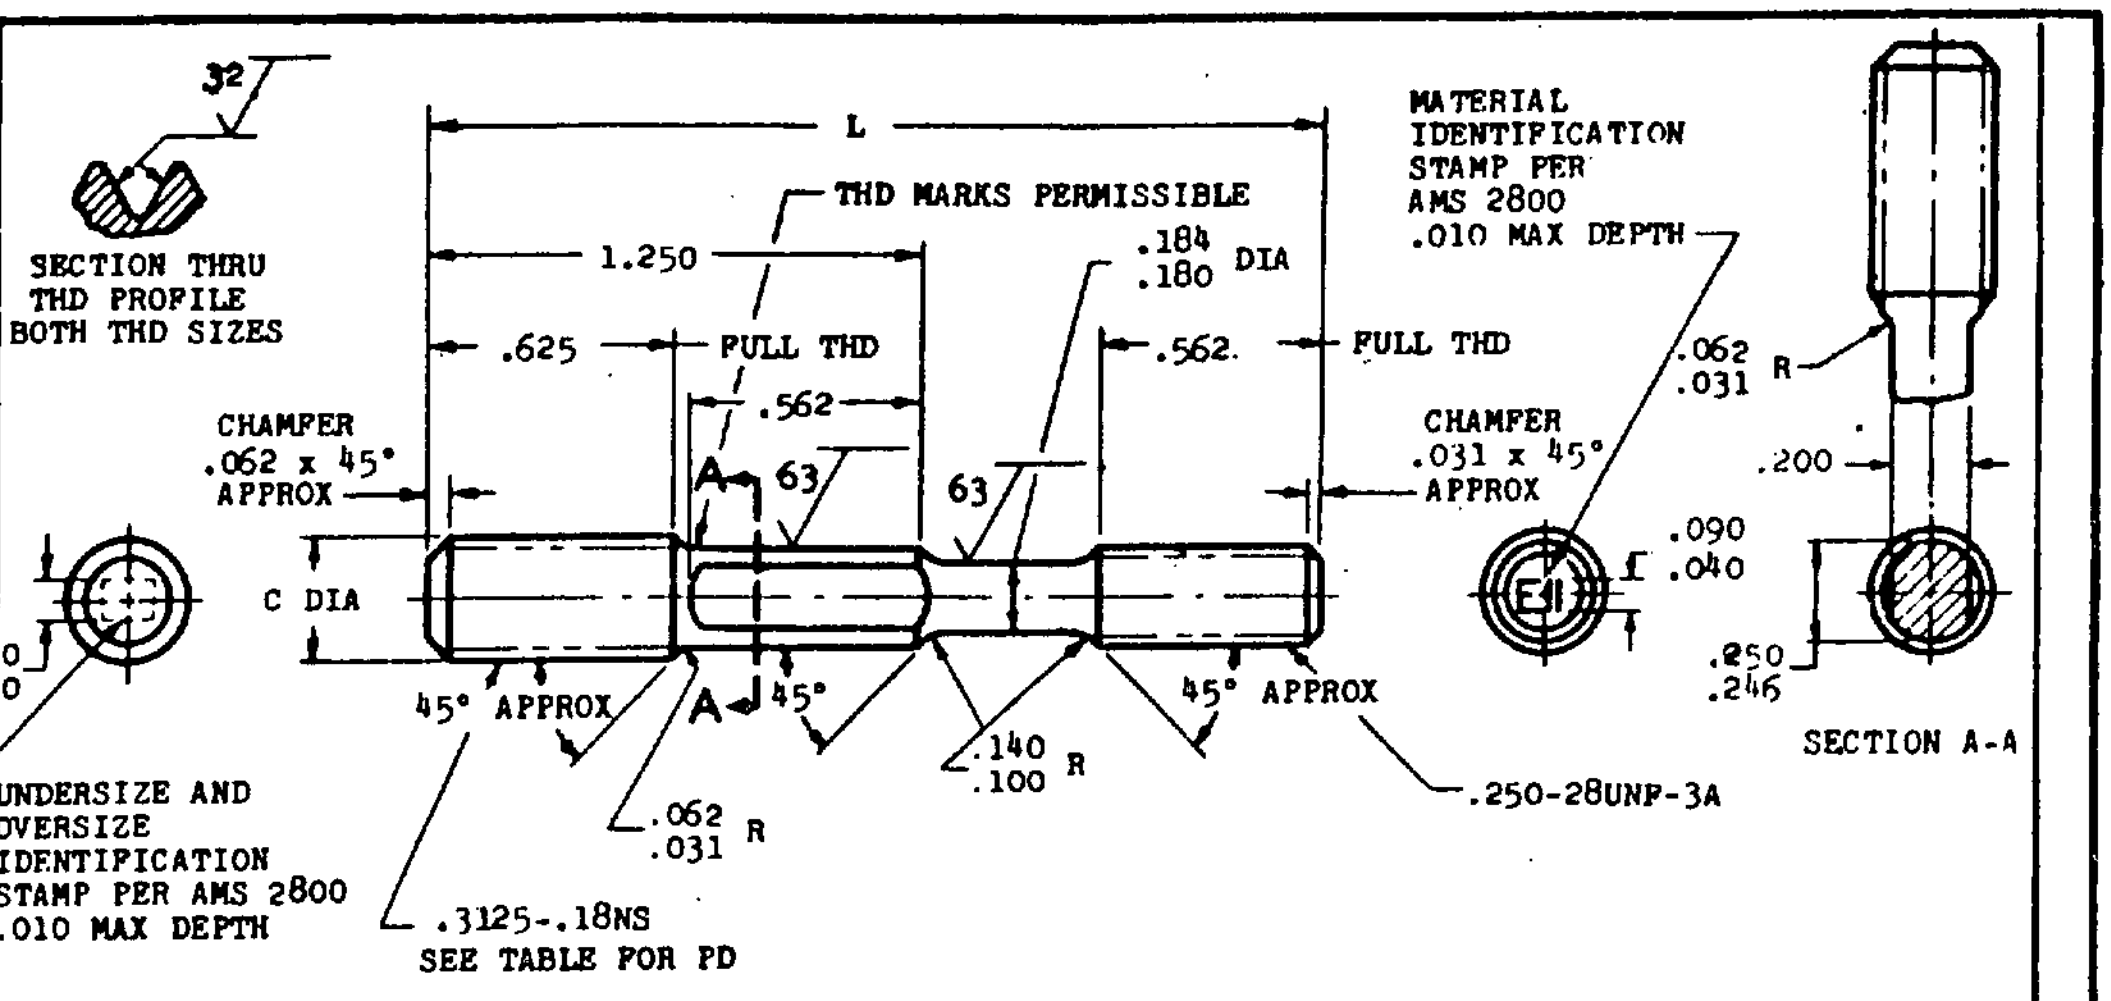

32
SECTION THRU THD PROFILE BOTH THD SIZES
L
THD MARKS PERMISSIBLE
1.250
.184
.180 DIA
MATERIAL IDENTIFICATION STAMP PER AMS 2800 .010 MAX DEPTH
.625
FULL THD
.562
FULL THD
.562
.062
.031 R
CHAMFER .062 x 45° APPROX
CHAMFER .031 x 45° APPROX
.200
A
63
63
C DIA
.090
.040
.120
.060
45° APPROX
A
45°
45° APPROX
.250
.246
SECTION A-A
.140
.100 R
.250-28UNF-3A
UNDERSIZE AND OVERSIZE IDENTIFICATION STAMP PER AMS 2800 .010 MAX DEPTH
.062
.031 R
.3125-.18NS SEE TABLE FOR PD

UNDERSIZE AND OVERSIZE IDENTIFICATION	-.003	STANDARD	+.003	+.006	+.009	+.012
	⓷ -3	◎	③	⑥	⑨	⑫
C PD BEFORE PLATING PD AFTER PLATING PD LEAD THREAD	.307- .312 .2775-.2785 .2780-.2795 .2714-.2734	.307- .312 .2805-.2815 .2810-.2825 .2744-.2764	.307- .312 .2835-.2845 .2840-.2855 .2774-.2794	.307- .312 .2865-.2875 .2870-.2885 .2804-.2824	.316- .321 .2895-.2905 .2900-.2915 .2834-.2854	.316- .321 .2925-.2935 .2930-.2945 .2864-.2884
L	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
2.062	AN167313	AN167314	AN167315	AN167316	AN167317	AN167318
2.125	AN167319	AN167320	AN167321	AN167322	AN167323	AN167324
2.188	AN167325	AN167326	AN167327	AN167328	AN167329	AN167330
2.250	AN167331	AN167332	AN167333	AN167334	AN167335	AN167336
2.312	AN167337	AN167338	AN167339	AN167340	AN167341	AN167342
2.375	AN167343	AN167344	AN167345	AN167346	AN167347	AN167348
2.500	AN167349	AN167350	AN167351	AN167352	AN167353	AN167354
2.625	AN167355	AN167356	AN167357	AN167358	AN167359	AN167360
2.750	AN167361	AN167362	AN167363	AN167364	AN167365	AN167366
2.875	AN167367	AN167368	AN167369	AN167370	AN167371	AN167372
3.000	AN167373	AN167374	AN167375	AN167376	AN167377	AN167378
3.125	AN167379	AN167380	AN167381	AN167382	AN167383	AN167384
3.250	AN167385	AN167386	AN167387	AN167388	AN167389	AN167390
3.375	AN167391	AN167392	AN167393	AN167394	AN167395	AN167396
3.500	AN167397	AN167398	AN167399	AN167400	AN167401	AN167402
3.625	AN167403	AN167404	AN167405	AN167406	AN167407	AN167408
3.750	AN167409	AN167410	AN167411	AN167412	AN167413	AN167414
3.875	AN167415	AN167416	AN167417	AN167418	AN167419	AN167420
4.000	AN167421	AN167422	AN167423	AN167424	AN167425	AN167426
4.125	AN167427	AN167428	AN167429	AN167430	AN167431	AN167432
4.250	AN167433	AN167434	AN167435	AN167436	AN167437	AN167438
4.375	AN167439	AN167440	AN167441	AN167442	AN167443	AN167444
4.500	AN167445	AN167446	AN167447	AN167448	AN167449	AN167450
4.625	AN167451	AN167452	AN167453	AN167454	AN167455	AN167456
4.750	AN167457	AN167458	AN167459	AN167460	AN167461	AN167462
4.875	AN167463	AN167464	AN167465	AN167466	AN167467	AN167468
5.000	AN167469	AN167470	AN167471	AN167472	AN167473	AN167474
5.125	AN167475	AN167476	AN167477	AN167478	AN167479	AN167480
5.250	AN167481	AN167482	AN167483	AN167484	AN167485	AN167486
5.375	AN167487	AN167488	AN167489	AN167490	AN167491	AN167492

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
MATERIAL: [redacted] (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010,
ANGULAR DIMENSIONS ±2°.
DO NOT USE UNASSIGNED PART NUMBERS.

② INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD.

③ CANCELED AS OF 9 OCT 87

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED REVISED ① 25 Mar 55 ② 26 Oct72 ③ 9 OCT 87

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN167301 THRU AN167600
NONE	[redacted] STUD-STEPPED, NECKED, WRENCH PAD, 2 DIA ENGAGEMENT .3125-18 x .250-28	

E-26-121

Project 5307-0421

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.