
FED. SUP CLASS
1630

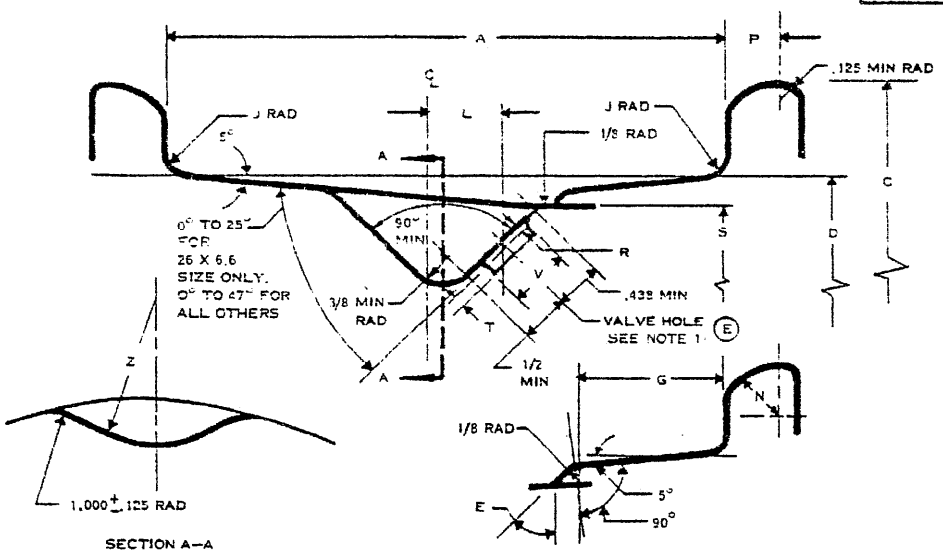

FLANGE DETAIL

SIZE	A ±.062	C +.047 −.016 DIA	D DIA	E DEG	G	J RAD	L ±.125	N RAD	P MIN	R RADIUS OR CHAMFER X 45°	S +.000 −.125 DIA	T MIN	V ±.007 DIA	Z ±.25 RAD
26X6.6	5.000	16.000	14.000 +.015 −.000	38	1.620 +.063 −.000	.250	(A)	.500	.563	.062-.094	13.500	.125	.625	3.00
30X7.7	6.000	18.000	16.000 +.015 −.000	38	1.620 +.063 −.000	.250	.750	.500	.625	.062-.094	15.500	.125	.625	3.00
32X8.8	7.000	18.250	16.000 +.015 −.000	28	2.000 +.063 −.000	.250	1.000	.563	.688	.062-.094	15.375	.125	.625	3.00
34X9.9	8.000	18.500	16.000 +.015 −.000	28	1.880 +.063 −.000	.250	(B) .875	.625	.688	.062-.094	15.375	.125	.625	3.00
36X11	9.000	18.750	16.000 +.015 −.000	38	2.130 +.063 −.000	.250	1.375	.688	.813	———	15.250	———	.781	4.00
38X11	9.000	20.750	18.000 +.015 −.000	38	2.130 +.063 −.000	.250	1.375	.688	.813	———	17.250	———	.781	4.00
40X12	10.000	21.000	18.000 +.015 −.000	38	2.500 +.125 −.000	.250	1.500	.750	.813	———	17.000	———	.781	4.00
44X13	11.000	23.750	20.000 +.016 −.000	38	3.375 +.125 −.000	.422	1.750	.938	.875	———	19.000	———	.781	4.00

NOTES

(E) 1. VALVE HOLE REQUIRED ON TUBETYPE AND CONVERTIBLE WHEELS ONLY. TUBELESS WHEELS REQUIRE A MACHINED BOSS PER MS33649.
2. (A) "L" DIMENSION FOR THE 26 X 6.6 = .406 ± .188.
3. (B) "L" DIMENSION FOR THE 34 X 9.9 = 1.375 ± .125 OPTIONAL.
4. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ± 1/64, DECIMALS ± .005, ANGLES ± 1/2°.
(E) 5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

THIS IS A DESIGN STANDARD AND SHALL NOT BE USED AS A PART NUMBER

User: Navy-MC
Reviewer: Army AV, Navy AS
(E) APPROVED 25 MAY 44 REVISED (A) 5 MAR 45 (B) 16 SEP 49 (C) 25 JAN 51 (D) 8 OCT 64 (E) 17 JUN 1963

This AND standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design application and for repetitive use shall be made from this document.

P.A. USAF-70 Other Cust ARMY-AV NAVY-AS	TITLE RIM CONTOURS-26X6.6, 30X7.7, 32X8.8, 34X9.9, 36X11, 38X11, 40X12, 44X13, TYPE VII, EXTRA HIGH PRESSURE MAIN LANDING GEAR WHEELS	AIRFORCE-NAVY AERONAUTICAL DESIGN STANDARD **AND10573**
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 1 OF 1

DD FORM 1 SEP 65 672

☆ U. S. GOVERNMENT PRINTING OFFICE: 1969-393-063 S-298

DATE
DRAWN BY _____
TYPED BY _____

NOTES TO PRINTER REDUCE BORDER TO 6-27/32x9-3/4. PRINT LEFT BORDER-LINE ONE INCH FROM LEFT EDGE OF 8x10-1/2 SHEET.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:30Z
Check the source to verify that this is the current version before use.