INCH-POUND

MIL-DTL-15665/116
13 January 2015

DETAIL SPECIFICATION SHEET

INSIGNIA, BRANCH OF SERVICE, OFFICER, CYBER WARFARE, U. S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-15665.

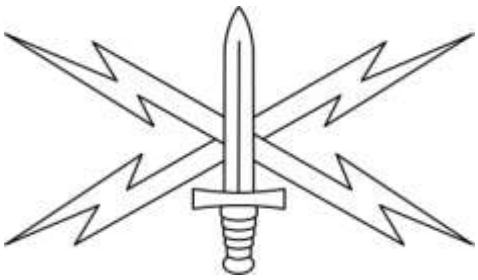

MATERIAL: Red Brass 85/15/ (UNS Alloy No. C-230)

FINISH: Nickel Plated, 22K Gold Plated, Mirror-like Polished, and shall match The Institute of Heraldry (TIOH) Metal Finish Chip No. 9.

DIMENSIONS:
HEIGHT: 15/16 inch (REF)
WIDTH: 1- 5/16 inches (REF)
THICKNESS: 0.078 inch ± 0.010 inch

ATTACHING DEVICE:
1. Attaching device will be prong and wing-grip clutch type with two prongs.

2. The prongs will be placed on the upper right hand bolt and the lower left hand bolt. Each prong shall have an overall length of 5/16 ± 1/8 inch and fused or soldered to the insignia.

NOTES:
1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. At the manufacturer's discretion, and for commercial sale only, Insignia may be finished as follows: 24K Gold Plated, Mirror-like Polished, and shall match TIOH Metal Finish Chip Number

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:07Z
Check the source to verify that this is the current version before use.

3. When a manufacturer elects to finish according to the provision made in NOTE 2, the manufacturer may deviate from MIL-DTL-15665 by using nickel undercoating prior to applying the requisite 24K gold plating.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2015-114)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:07Z
Check the source to verify that this is the current version before use.