NOT MEASUREMENT SENSITIVE


MIL-DTL-15665/119
17 November 2020

DETAIL SPECIFICATION SHEET

INSIGNIA, COLLAR, U.S. SPACE FORCE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-15665.

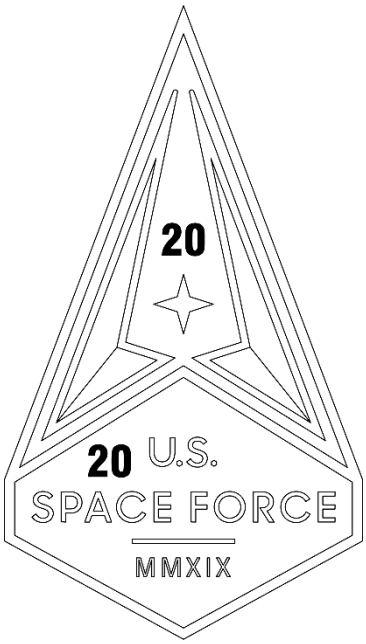

MATERIAL: Red Brass 85/15 (UNS Alloy No. C- 230)

FINISH: Nickel Plated, Mirror Like Polished and shall match The Institute of Heraldry Metal Finish Chip Number 16.

DIMENSIONS:
HEIGHT: 1-1/2 inches (REF)
WIDTH (Widest point): 7/8 inch (REF)
THICKNESS: 0.090 inch ± 0.010 inch

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:08Z
Check the source to verify that this is the current version before use.

ATTACHING DEVICE:

1. Attaching device shall be 2 prongs with a wing type clutch.

2. The prongs shall be located on the vertical center line, 1/8 inch from the top and bottom edges.

EPOXY: Epoxy resin shall be applied to the Collar Insignia as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below.

COLOR:	LOCATION:
Blue Epoxy #20	Background area where 20 is located

NOTES:

1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Epoxy will be stoned.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2021-048)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:08Z
Check the source to verify that this is the current version before use.