NOT MEASUREMENT SENSITIVE


MIL-DTL-15665/121
4 October 2021

DETAIL SPECIFICATION SHEET

INSIGNIA, SERVICE CAP, ENLISTED, MALE AND FEMALE,
U.S. SPACE FORCE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-15665.

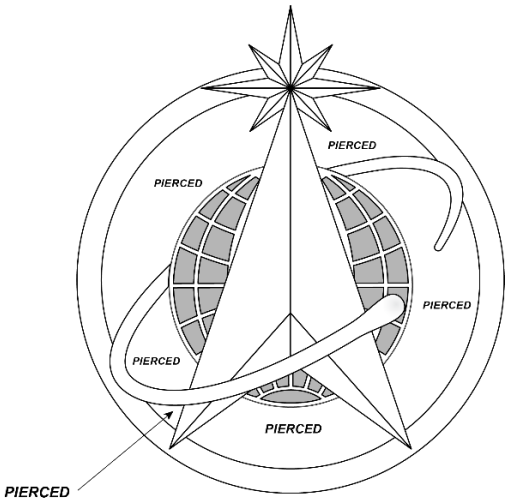

MATERIAL: Red Brass 85/15 (UNS Alloy No. C- 230)


FINISH: Nickel Plated, with Glossy Black Lacquer and Brightly Polished Highlights

DIMENSIONS:
HEIGHT: 2 inches (REF)
WIDTH: 1-3/4 inches (REF)
THICKNESS (Outer rim): 0.050 inch ± 0.010 inch

ATTACHING DEVICE:
-1: Attaching device for Male insignia shall be screwpost with thumb nut and two registering prongs as shown below. The screw post shall be 9/16 inch + 1/32 inch in length, 1/8 inch in diameter and shall have a No. 5-40 UNC-2A thread. The thumb nut shall be 0.625 inch + 0.010 inch in diameter and shall have a No. 5-40 UNC-2B thread. The registering prongs shall be 1/4 inch + 1/64 inch in length and 0.032 inch + 0.002 inch in diameter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:08Z
Check the source to verify that this is the current version before use.

-2: Attaching device for Female insignia shall be two prongs and clutch type as shown and centered on the wreath.

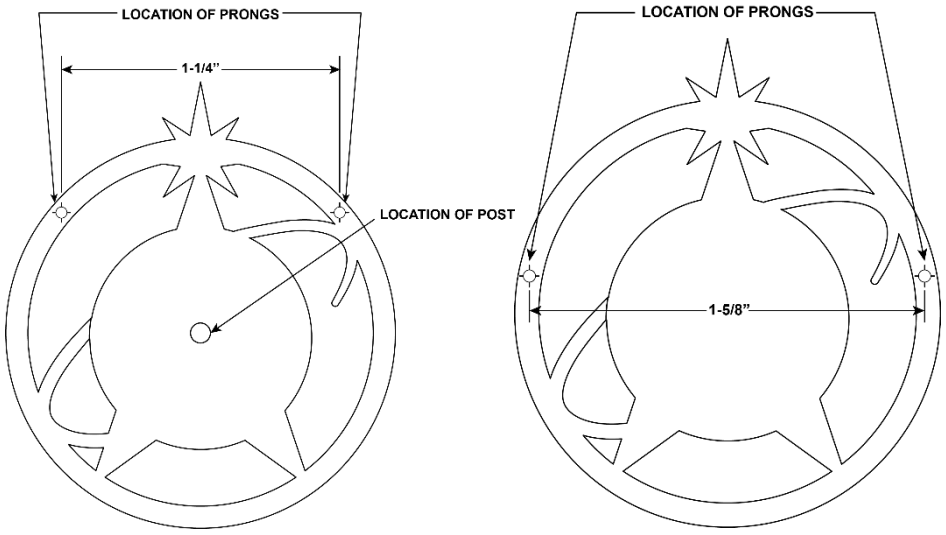

MALE (-1) FEMALE (-2)

NOTES:

1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Pierced areas shall be as indicated above.

3. A full forcer shall be used to bring up the details of the design.

Custodian:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2021-734)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:08Z
Check the source to verify that this is the current version before use.