NOT MEASUREMENT SENSITIVE


MIL-DTL-15665/125
9 September 2024

DETAIL SPECIFICATION SHEET

INSIGNIA, DRESS AND SERVICE CAP, OFFICER, U.S. MARINE CORPS

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-15665.

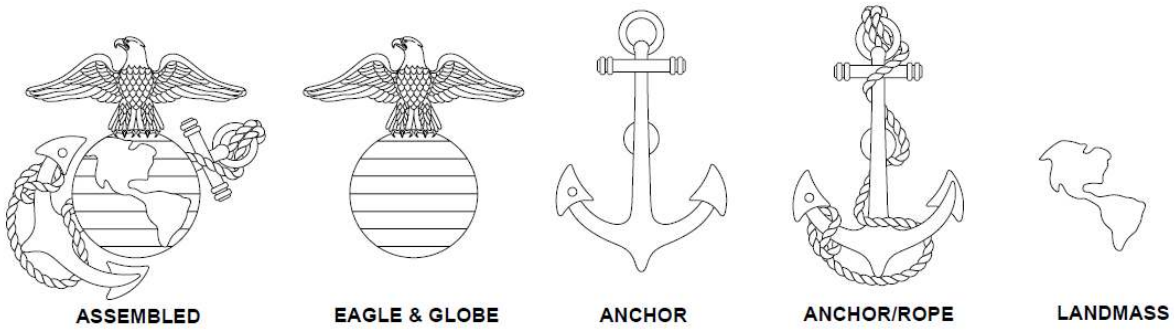

DASH NO.
-1: Cap, Dress, Silver/Gold
-2: Cap, Service, Black

MATERIAL:

-1, -2: Red Brass 85/15 (UNS Alloy No. C- 230)

FINISH:
-1: Eagle, Globe and Rope - Nickel Plated, Rhodium Plated, Brightly Polished.

-1: Land Mass and Anchor - 24K Gold Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 6.

-2: Flat Black Enamel and shall match TIOH metal Finish Chip Number 21.

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:08Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
HEIGHT (Overall):
Eagle/Globe: 1-3/8 inches (REF)
Fouled Anchor: 1-5/8 inches (REF)
WIDTH (At wing tips and anchor flukes):
Eagle/Globe: 1-3/8 inches (REF)
Fouled Anchor: 1-1/16 inches (REF)
THICKNESS: (At eagle head and anchor flukes)
Eagle/Globe: 0.026 ± 0.005
Fouled Anchor: 0.026 ± 0.005
Land Mass: 0.026 ± 0.005

ATTACHING DEVICE:
1. The attaching device shall be a screw post with nut.

2. The screw post shall be 1/2 inch ± 1/32 inch long, 1/8 inch in diameter and shall have a No. 5-40 UNC-2A thread. The thumb nut shall be 0.625 inch ± 0.010 inch or 0.500 inch ± 0.010 inch in diameter and shall have a No. 5-40 UNC-2B thread.

3. The screw post shall be soldered or electronically fused to the insignia in the center of the anchor on the registering pad as indicated.

4. The registering prong shall be 3/16 inch ± 1/64 inch in length and 0.032 inch ± 0.002 inch in diameter. The prong shall be fused or soldered on the vertical center line on the back of the eagle's breast.

ROPE:
1. The rope for shall be 2 wires at .032 diameter twisted at 16 ± 5 twists per 1” and finished at .058 ± .005.

2. The rope will be soldered to the anchor as indicated.

LAND MASS:
1. Manufacturer will create a blanking tool for the land mass shape as indicated on TIOH Drawing B-1-0020.

2. Land mass shall be dapped to match the radius of the globe. The land mass shall be soldered to the globe as indicated.

FORCER: Full Forcers shall be used on eagle, globe and anchor.

NOTES:
1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Trimming on both sides of the eagle's head to be accomplished without altering or distorting the design detail.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:08Z
Check the source to verify that this is the current version before use.

Custodians:
Army - IH
Navy - MC

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2024-281)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:08Z
Check the source to verify that this is the current version before use.