
MILITARY SPECIFICATION


FILTERS, RADIO FREQUENCY INTERFERENCE, HERMETICALLY SEALED, STYLE FL22

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The complete requirements for acquiring the filters described herein shall consist of this specification sheet and the latest issue of MIL-F-15733.

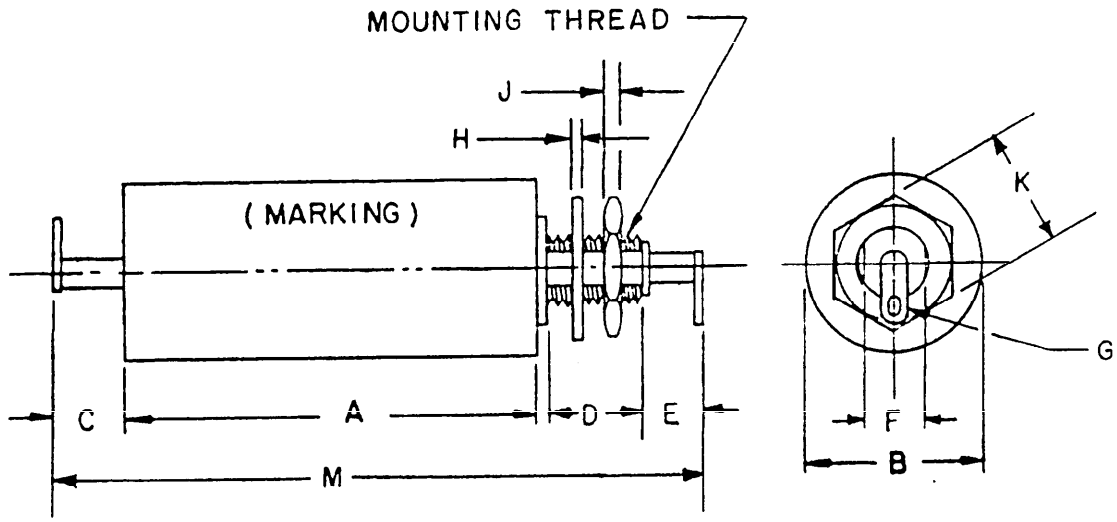

Style 1

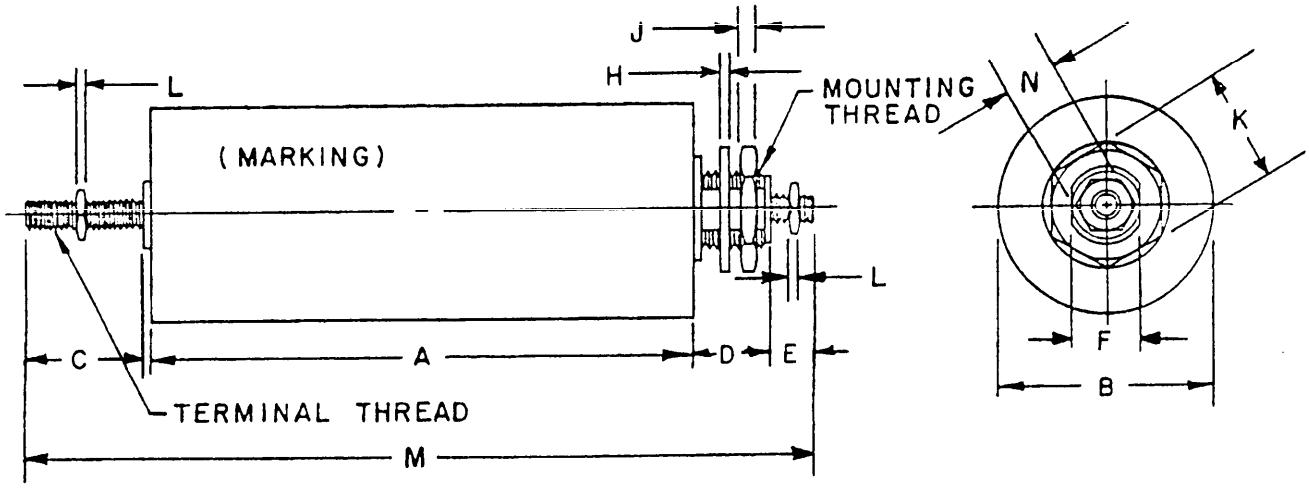

Style 2



TYPICAL CIRCUIT DIAGRAM

FIGURE 1. Case dimensions and circuit diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:13Z
Check the source to verify that this is the current version before use.

FSC 5915

Dimensions.

Dash Number	A		B		C		D		E		F		G	H		J		K		L		M	Mounting thread	Terminal thread	Terminal sytle	Max weight lbs
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max		Min	Max	Min	Max	Min	Max	Min	Max	Max				
0001	2.032 (51.61)	2.156 (54.76)	.688 (17.48)	.812 (20.62)	.172	.312	.265	.286	.125	.250	.245 (6.22)	.255 (6.48)	.09 X .187	.017	.027	.12	.13	.427	.447	NA		3.00	.312-24 UNF-2A	NA	1	.12
0002	2.313 (58.75)	2.437 (61.90)	.938 (23.83)	1.062 (26.97)	.141	.312	.359	.380	.125	.312	.435 (11.05)	.445 (11.30)	.06 X .125 or .09 X .187					.615	.698			3.63	.500-28 UNEF-2A	NA	1	.24
0003	2.688 (68.28)	2.812 (71.42)	.938 (23.83)	1.062 (26.97)	.125	.250			.125	.250	.435 (11.05)	.445 (11.30)	.06 X .125 or .09 X .187					.615	.698			3.78	.500-28 UNEF-2A	NA	1	.26
0004	2.688 (68.28)	2.812 (71.42)	1.063 (27.00)	1.187 (30.15)	.187	.312	.370		.187	.312	.365 (9.27)	.375 (9.52)	.09 X .187	.03	.04			.615	.635			3.82	.437-20 UNF-2A	NA	1	.33
0005	2.438 (61.93)	2.562 (65.07)	1.188 (30.18)	1.312 (33.32)	.125	.250			.125	.250	.525 (13.34)	.535 (13.59)	.093 Dia.	.017	.027	.151	.161	.865	.885			3.44	.625-24 UNEF-2A	NA	1	.39
0006	2.938 (74.63)	3.062 (77.77)	1.313 (33.35)	1.437 (36.50)	.308	.410			.308	.410	.525 (13.34)	.535 (13.59)	NA					.865	.885	.12	.13	4.85	.625-24 UNEF-2A	.190-32 UNF-2A	2	.58
0007	3.188 (80.98)	3.312 (84.12)	1.438 (36.53)	1.562 (39.67)	.308	.410			.308	.410	.650 (16.51)	.660 (16.76)	NA					1.052	1.072	.12	.13	5.03	.750-20 UNEF-2A	.190-32 UNF-2A	2	.78

Dash Number	N	
	Min	Max
0001	NA	
0002	NA	
0003	NA	
0004	NA	
0005	NA	
0006	.37	.38
0007	.37	.38

INCHES	MM	INCHES	MM
.017	.43	.410	10.41
.027	.69	.427	10.85
.03	.8	.447	11.35
.04	1.0	.615	15.62
.06	1.5	.635	16.13
.09	2.3	.698	17.73
.093	2.36	.865	21.97
.12	3.0	.885	22.48
.125	3.18	1.052	26.72
.13	3.3	1.072	27.23
.141	3.58	3.000	76.2
.151	3.84	3.44	87.37
.161	4.09	3.63	92.2
.187	4.75	3.78	96.01
.250	6.35	3.82	97.03
.265	6.73	4.85	123.19
.312	7.92	5.03	127.76
.359	9.12		
.37	9.4		
.38	9.7		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in parenthesis.
3. Metric equivalents are given for general information only.
4. Mounting hardware shall be supplied with the filter.
5. Circuit diagram is for information only.

FIGURE 1. Case dimensions and circuit diagrams - Continued.

Source: https://assist.dla.mil -- Downloaded: 20260-18T07:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case: Metal.

Terminals:

Style 1 - Solderable.

Style 2 - Threaded stud.

Recommended mounting torque:

Thread	Maximum Torque (IN-LB)	Thread	Maximum Torque (IN-LB)
.312-24 UNF-2A	10	.625-24 UNEF-2A	85
.500-28 UNEF-2A	80	.750-20 UNEF-2A	100
.437-20 UNF-2A	70	.190-32 UNF-2A	18

Weight: See figure I.

Operating temperature range: -55°C to +85°C.

Rated voltage: See table I.

Rated current: See table I.

Insertion loss (at +25°C): See table I.

(at -55°C and +85°C): Insertion loss shall be as specified in table I except that a degradation of 2 dB from the value specified in table I shall be allowed up to 10 MHz.

Seal: In accordance with MIL-F-15733.

Temperature rise: 25°C, maximum.

Dielectric withstanding voltage: Method 301, MIL-STD-202. 2.5 times the rated voltage, applied between each terminal and ground, for a period for 1 to 5 seconds. Maximum charging current: 50 mA.

Insulation resistance: In accordance with MIL-F-15733. Insulation resistance measured between both terminals connected together and the case shall be at least:

Dash numbers

0001, 0002, and 0004 - 1,000 megohms.

0003, 0005, 0006, and 0007 - 500 megohms.

Voltage drop: .5 volt, maximum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:13Z
Check the source to verify that this is the current version before use.

Insertion loss: In accordance with MIL-F-15733 and table I.

Terminal strength:

Style 2 - Method 211, test condition E of MIL-STD-202.

Style 1 - Method 211, test condition A (applied force: 5 pounds) and B (5 bends) of MIL-STD-202.

Resistance to soldering heat: In accordance with MIL-F-15733. Not applicable for Style 2.

Salt spray (corrosion): Method 101, test condition A, MIL-STD-202.

TABLE I. Electrical characteristics.

Dash number	Circuit diagram	Rated voltage (Vdc)	Rated current (A)	Minimum insertion loss (dB) in accordance with MIL-STD-220 at +25°C 1/									
				.15 MHz	.30 MHz	.60 MHz	1 MHz	10 MHz	20 MHz	40 MHz	100 MHz	500 MHz	1,000 MHz
0001	π	100	1	50	60	60	60	60	60	60	60	60	60
0002	"	"	5	40	50	"	"	"	"	"	"	"	"
0003	"	"	5	50	60	"	"	"	"	"	"	"	"
0004	"	"	10	40	50	"	"	"	"	"	"	"	"
0005	"	"	10	50	60	"	"	"	"	"	"	"	"
0006	"	"	20	50	60	"	"	"	"	"	"	"	"
0007	"	"	30	50	60	"	"	"	"	"	"	"	"

1/ Full load insertion loss measurements shall be performed at frequencies between 150 kHz to 20 MHz inclusive; all other measurements shall be performed at no-load.

Thermal shock and immersion:

Thermal shock: Method 107, test condition A, MIL-STD-202.

Immersion: Method 104, test condition A, MIL-STD-202.

Measurements after cycling:

Dielectric withstanding voltage: As initially specified, except the test voltage shall be 90 percent of that initially specified.

Insulation resistance shall not be less than 30 percent of the initial value specified.

Insertion loss (check test) shall be measured and shall meet initial requirements.

Shock (specified pulse): Method 213, test condition I, MIL-STD-202.

Mounting: Filters shall be rigidly mounted by the body.

Source: https://assist.dla.mil Downloaded: 2026-10-18T07:13Z
Check the source to verify that this is the current version before use.

Electrical load: 100 percent of rated voltage between either terminal and case.

Insertion loss (check test) shall be measured and shall meet initial requirements.

Vibration, high frequency: Method 204, test condition D (20g), MIL-STD-202.

Electrical load: Rated voltage and current shall be applied continuously during test.

Test during vibration: During the last cycle in each direction, an electrical measurement shall be made to determine intermittent open- or short-circuiting.

After vibration test: Filters shall be subjected to and shall meet the initial requirements of the insertion loss (check test).

Moisture resistance: Method 107, test condition A, MIL-STD-202. No measurement shall be made before and after cycling. Filters shall be tested in accordance with method 106 of MIL-STD-202. The following details shall apply:

Initial measurement: Not applicable.

Polarization voltage: 100 Vdc.

Measurements after 24-hour drying period:

Dielectric withstanding voltage: As initially specified, except the test voltage shall be 90 percent of that initially specified.

Insulation resistance shall not be less than 30 percent of the initial value specified.

Insertion loss (check test) shall meet initial requirements.

Part number: M15733/01- (dash number from figure 1 and table I).

Changes from previous issue. Revision letters are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME, AT, AV
Navy - MC, AS, OS
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5915-0259-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:13Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

Naval Electronic Systems Command
Washington, D. C. 20363

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20363

ATTN: ELEX 8111

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:13Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-F-15733/16

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 202610-18T07:13Z
Check the source to verify that this is the current version before use.