INCH-POUND

MIL-F-15733/2J
12 December 1988
SUPERSEDING
MIL-F-15733/2H
11 January 1983

MILITARY SPECIFICATION SHEET


FILTERS, RADIO FREQUENCY INTERFERENCE, HERMETICALLY SEALED, STYLE FL24

Ⓙ

Inactive for new design after 12 December 1988. For new design use MIL-F-15733/73. See table II for substitution data.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-15733.

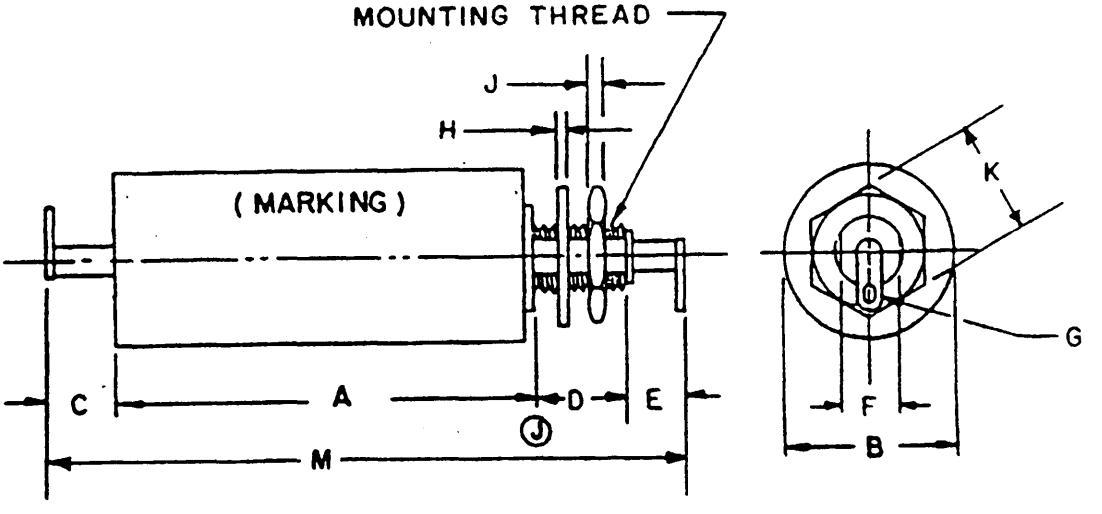


Style 1

FIGURE 1. Case dimensions and circuit diagram.


Ⓙ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-18T07:14Z
Check the source to verify that this is the current version before use.

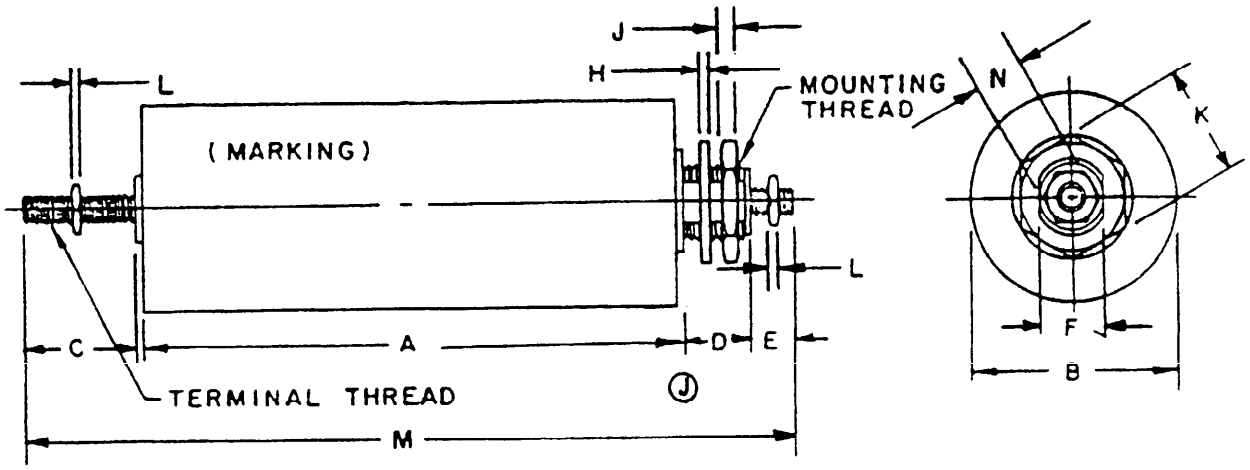

Style 2



TYPICAL CIRCUIT DIAGRAM

FIGURE 1. Case dimensions and circuit diagram - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:14Z
Check the source to verify that this is the current version before use.

Dimensions

Dash number	A		B		C		D		E		F		G
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	
0001	2.500 (63.50)	2.624 (66.64)	.813 (20.65)	.937 (23.80)	.141 (3.58)	.312 (7.92)	.360 (9.14)	.390 (9.90)	.187 (4.75)	.312 (7.92)	.432 (10.97)	.445 (11.30)	.09 x .187 (2.3 x 4.75)
0002	3.813 (96.85)	3.937 (100.00)	1.063 (27.00)	1.187 (30.15)	.141 (3.58)	.312 (7.92)	.360 (9.14)	.390 (9.90)	.187 (4.75)	.312 (7.92)	.525 (13.34)	.536 (13.61)	.09 x .187 (2.3 x 4.75)
0003	3.813 (96.85)	3.937 (100.00)	1.188 (30.18)	1.312 (33.32)	.141 (3.58)	.312 (7.92)	.360 (9.14)	.390 (9.90)	.125 (3.18)	.312 (7.92)	.650 (16.51)	.660 (16.76)	.093 Dia (2.36) .09 x .187 2.3 x 4.75)
0004	4.063 (103.20)	4.187 (106.35)	1.313 (33.35)	1.437 (36.50)	.308 (7.82)	.624 (15.85)	.360 (9.14)	.390 (9.90)	.308 (7.82)	.624 (15.85)	.650 (16.51)	.660 (16.76)	NA
0005	4.094 (103.99)	4.218 (107.14)	1.438 (36.53)	1.562 (39.67)	.308 (7.82)	.624 (15.85)	.360 (9.14)	.390 (9.90)	.308 (7.82)	.624 (15.85)	.650 (16.51)	.660 (16.76)	NA
0006	4.063 (103.20)	4.187 (106.35)	2.188 (55.58)	2.312 (58.72)	.312 (7.92)	.440 (11.18)	.495 (12.57)	.505 (12.82)	.312 (7.92)	.440 (15.85)	1.045 (26.54)	1.060 (26.92)	NA

FIGURE 1. Case dimensions and circuit diagram - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026/0-18T07:14Z
Check the source to verify that this is the current version before use.

Dimensions

Dash number	H		J		K		L		M	Mounting thread	Terminal thread	Terminal style	Max weight (LBS)	N	
	Min	Max	Min	Max	Min	Max	Min	Max	Max					Min	Max
0001	.017 (.43)	.027 (.69)	.12 (3.1)	.13 (3.3)	.615 (15.62)	.698 (17.73)	NA	NA	3.63 (92.2)	.500-28 UNEF-2A	---	1	.19	---	---
0001	.017 (.43)	.055 (1.40)	.12 (3.1)	.161 (4.09)	.802 (20.37)	.885 (22.47)	NA	NA	4.95 (125.7)	.625-24 UNEF-2A	---	1	.46	---	---
0003	.017 (.43)	.027 (.69)	.12 (3.1)	.161 (4.09)	.928 (23.57)	1.072 (27.23)	NA	NA	4.95 (125.7)	.750-20 UNEF-2A	---	1	.6	---	---
0004	.017 (.43)	.027 (.69)	.12 (3.1)	.161 (4.09)	.928 (23.57)	1.072 (27.23)	.12 (3.1)	.13 (3.3)	5.88 (149.4)	.750-20 UNEF-2A	.190-32 UNF-2A	2	.8	.36 (9.14)	.38 (9.65)
0005	.017 (.43)	.027 (.69)	.12 (3.1)	.161 (4.09)	.928 (23.57)	1.072 (27.23)	.12 (3.1)	.13 (3.3)	5.88 (149.4)	.750-20 UNEF-2A	.190-32 UNF-2A	2	.9	.36 (9.14)	.38 (9.65)
0006	.057 (1.45)	.067 (1.70)	.182 (4.62)	.192 (4.88)	1.615 (41.02)	1.635 (41.53)	.095 (2.41)	.105 (2.67)	6.31 (160.3)	1.125-18 UNEF-2A	.250-28 UNF-2A	2	2.0	.432 (10.97)	.442 (11.23)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in parentheses.
3. Metric equivalents are given for general information only.
4. Mounting hardware shall be supplied with the filter.
5. Circuit diagram is for information only.

FIGURE 1. Case dimensions and circuit diagram - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case: Metal.

Terminals:

Style 1: Solderable.

Style 2: Threaded stud.

Recommended mounting torque:

Thread	Maximum Torque (in-lb)	Thread	Maximum Torque (in-lb)
.500-28 UNEF-2A	80	1.125-18 UNEF-2A	200
.625-24 UNEF-2A	85	.190-32 UNF-2A	18
.750-20 UNEF-2A	100	.250-28 UNF-2A	40

Weight: See figure 1.

Operating temperature range: -55°C to +85°C.

Rated (power) frequency: 0 to 400 hz.

Rated voltage: See table I.

Rated current: See table I.

Insertion loss (at +25°C): See table I.

(at -55°C and +85°C): Insertion loss shall be as specified in table I except that a degradation of 2 dB from the value specified in table I shall be allowed up to 10 MHz.

Seal: In accordance with MIL-F-15733.

Ⓙ Temperature rise: +25°C for parts rated up to and including 10 amperes, +35°C for parts rated above 10 amperes.

Dielectric withstanding voltage: Method 301 of MIL-STD-202. 2.5 times the rated dc voltage, applied between each terminal and ground, for a period of 1 to 5 seconds. Maximum charging current: 50 mA.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:14Z
Check the source to verify that this is the current version before use.

Insulation resistance: In accordance with MIL-F-15733. Insulation resistance measured between both terminals connected together and the case shall be at least:

Dash numbers

0001 and 0002 - 1,000 megohms

0003, 0004, 0005, and 0006 - 500 megohms

Voltage drop: .5 volt, maximum.

Insertion loss: In accordance with MIL-F-15733 and table I.

Terminal strength:

Style 2: Method 211, test condition E of MIL-STD-202.

Style 1: Method 211, test conditions A (applied force: 5 pounds) and B (5 bends) of MIL-STD-202.

TABLE I. Electrical characteristics.

Dash number	Circuit diagram	Rated voltage		Rated current (A)	Minimum insertion loss (dB) in accordance with MIL-STD-220 at +25°C 1/									
		Vdc	Vac		.15 MHz	.30 MHz	.60 MHz	1 MHz	10 MHz	20 MHz	40 MHz	100 MHz	500 MHz	1,000 MHz
0001	π	400	125	1	50	60	60	60	60	60	60	60	60	60
0002	"	"	"	5	"	"	"	"	"	"	"	"	"	"
0003	"	"	"	10	"	"	"	"	"	"	"	"	"	"
0004	"	"	"	15	"	"	"	"	"	"	"	"	"	"
0005	"	"	"	20	"	"	"	"	"	"	"	"	"	"
0006	"	"	"	55	"	"	"	"	"	"	"	"	"	"

1/ Full load and no load insertion loss measurements shall be conducted at the specified frequency ranges in MIL-STD-220.

Resistance to soldering heat: In accordance with MIL-F-15733. Not applicable for style 2.

Salt spray (corrosion): Method 101, test condition A of MIL-STD-202.

Thermal shock and immersion:

Thermal shock: Method 107, test condition A of MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:14Z
Check the source to verify that this is the current version before use.

Immersion: Method 104, test condition A of MIL-STD-202.

Measurements after cycling:

Dielectric withstanding voltage: As initially specified, except the test voltage shall be 90 percent of that initially specified.

Insulation resistance shall not be less than 30 percent of the initial value specified.

Shock (specified pulse): Method 213, test condition I of MIL-STD-202.

Mounting: Filters shall be rigidly mounted by the body.

Electrical load: 100 percent of rated voltage between either terminal and case.

Insertion loss (check test) shall be measured and shall meet initial requirements.

Vibration, high frequency: Method 204, test condition D (20g) of MIL-STD-202.

Electrical load: Rated voltage and current shall be applied continuously during test.

Test during vibration: During the last cycle in each direction, an electrical measurement shall be made to determine intermittent open- or short-circuiting.

After vibration test: Filters shall be subjected to and shall meet the initial requirements of the insertion loss (check test).

Moisture resistance: Method 107, test condition A of MIL-STD-202, except that the temperature of step 3 shall be +85°C. No measurement shall be made before and after cycling. Filters shall be tested in accordance with method 106 of MIL-STD-202. The following details shall apply:

Initial measurement: Not applicable.

Polarization voltage: 100 V dc.

Measurements after 24-hour drying period:

Dielectric withstanding voltage: As initially specified, except the test voltage shall be 90 percent of that initially specified.

Insulation resistance shall not be less than 30 percent of the initial value specified.

Insertion loss (check test) shall meet initial requirements.

Part or identifying number (PIN): M15733/02- (dash number from figure 1 and table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:14Z
Check the source to verify that this is the current version before use.

Ⓙ Substitution data: See table II.

Ⓙ TABLE II. Substitution data.

Superseded military part or identifying number	Superseding military part or identifying number
M15733/02-0001	M15733/73-0037
M15733/02-0002	M15733/73-0042
M15733/02-0003	M15733/73-0045
M15733/02-0004	M15733/73-0048
M15733/02-0005	M15733/73-0048
M15733/02-0006	M15733/73-0052

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - SH
Air Force - 11, 99
DLA - ES

User activities:
Army - AT, AV, ME
Navy - AS, MC, OS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5915-0342)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:14Z
Check the source to verify that this is the current version before use.