MILITARY SPECIFICATION

SEMICONDUCTOR DEVICE, DIODE, SILICON, VIDEO DETECTOR

TYPE 1N32

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the detail requirements for a silicon semiconductor diode for use in an S-band detector.

1.2 Physical dimensions. See figure 1.

1.3 Ratings and characteristics.

Limits	R_V	M
	ohms	
Minimum	4,000	65
Maximum	22,000	---

OPERATING AMBIENT TEMPERATURE: -50° to +70°C

STORAGE TEMPERATURE: -50° to +70°C

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-S-19500 - Semiconductor Devices, General Specification for.

STANDARD

MILITARY

MIL-STD-750 - Test Methods for Semiconductor Devices.

DRAWING

Armed Services Electro-Standards Agency

152-JAN - SA Band Crystal Detector Test Holder.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:48Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 General. Requirements for semiconductor diodes shall be in accordance with MIL-S-19500, and as specified herein.

3.2 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-S-19500, and as follows:

M - - - - - - - - - - - - - - - Figure of merit.

R_A - - - - - - - - - - - - - - Equivalent noise resistance.

R_V - - - - - - - - - - - - - - Video resistance.

3.3 Design, construction, and physical dimensions. The semiconductor diodes shall be of the design, construction, and physical dimensions specified on figure 1.

3.3.1 Plating. The diode shall be plated as specified on figure 1.

3.4 Performance characteristics. Performance characteristics shall be as specified in tables I and II.

* 3.5 Marking. The marking shall be as specified in MIL-S-19500, except that the Manufacturer's identification and Country of origin may be omitted at the option of the manufacturer.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection shall be in accordance with MIL-S-19500, and as specified herein.

* 4.2 Test conditions. Unless otherwise specified herein, the test conditions (when applicable) shall be as follows:

P = 5 μW maximum
f = 3,295 ±5 MHz
R_A = 1,200 ohms
Drawing 152-JAN

4.3 Qualification inspection. Qualification inspection shall consist of the examinations and tests specified in tables I and II.


4.4 Quality conformance inspection. Quality conformance inspection shall consist of the examinations and tests specified in groups A and B inspections.

4.4.1 Group A inspection. Group A inspection shall consist of the examinations and tests specified in table I.

4.4.2 Group B inspection. Group B inspection shall consist of the examinations and tests specified in table II.

4.5 Method of examination and test. Methods of examination and test shall be as specified in table I and II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:48Z
Check the source to verify that this is the current version before use.

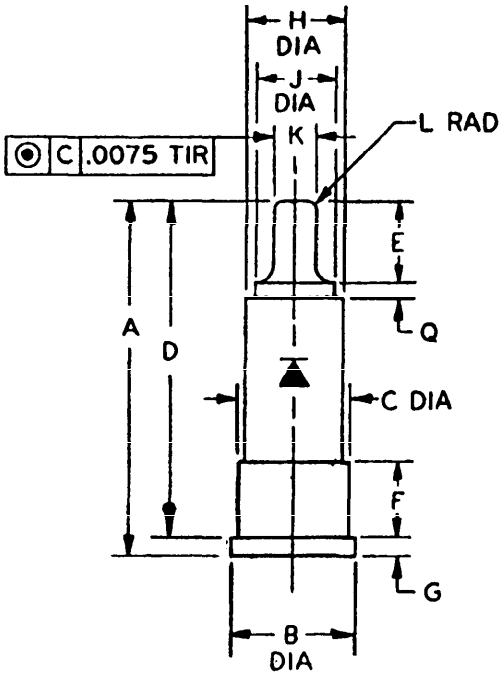

LTR	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.800	.840	20.32	21.34
B	.292	.296	7.42	7.52
C	.246	.250	6.25	6.35
D	.753	.783	19.13	19.89
E	.180	.190	4.57	4.83
F	.193	.199	4.90	5.05
G	.047	.057	1.19	1.45
H	.222	.240	5.64	6.10
J	.195	.225	4.95	5.72
K	.092	.094	2.34	2.39
L	.030	.046	.76	1.17
Q	.020	.030	.51	.76

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Metal parts shall be gold plated 10 msi minimum.
4. All burrs and sharp edges shall be removed.
5. The polarity shall be indicated by an arrow, with the arrow pointing in the direction of easier current flow.

FIGURE 1. Semiconductor device, diode, type 1N32.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:48Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection

Examination or test	MIL-STD-750		LTPD	Symbol	Limits		Unit
	Method	Details			Min	Max	
Subgroup 1			7				
Visual and mechanical examination	2071			---	---	---	---
Subgroup 2			10				
Video resistance	4131	Test method A or B, V = 5 mV, max		R_V	4,000	22,000	ohm
Figure of merit (see 4.2)	4111			M	85	---	---

TABLE II. Group B inspection

Examination or test	MIL-STD-750		LTPD	Symbol	Limits		Unit
	Method	Details			Min	Max	
Subgroup 1							
Physical dimensions	2066	Dim. C, J, K, and note 2 of figure 1	7	---	---	---	---
		Dim. A, B, D, E, F, G, H, L, and Q	20	---	---	---	---
Subgroup 2			15				
Thermal shock (temperature cycling)	1051	Test cond. A, T(high) = +70°C T(low) = -50°C		---	---	---	---
Immersion	1011	Test cond. A, 1 cycle; T = 40°C (max)		---	---	---	---
End points:							
Video resistance	4131	Test method A or B, V = 5 mV, max		R_V	4,000	22,000	ohms
Figure of merit (see 4.2)	4111			M	85	---	---
Subgroup 3			15				
Burnout by repetitive pulsing	4141	t = 1 minute; e_o = 6.0 v; R_g = 25 ohms; t_p = 1.0 μsec; PRF = 800 - 1,200 pps		---	---	---	---
End points: (Same as for subgroup 2)							
Subgroup 4			15				
Shock	2016	Nonoperating; 500 G; t ≅ 0.5 msec; 5 blows in each orientation: X_1, Y_1, and Y_2		---	---	---	---
Vibration, variable frequency	2056	Nonoperating		---	---	---	---
Constant acceleration	2006	Nonoperating; 10,000 G; X_1, Y_1, and Y_2 orientations		---	---	---	---
End points: (Same as subgroup 2)							

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:48Z
Check the source to verify that this is the current version before use.

TABLE II. Group B inspection - Continued

Examination or test	MIL-STD-750		LTPD	Symbol	Limits		Unit
	Method	Details			Min	Max	
Subgroup 5			λ = 15				
High-temperature life (nonoperating)	1031	T_A = 70°C		---	---	---	---
End points: (Same as subgroup 2)							

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with MIL-S-19500.

6. NOTES

6.1 Notes. The notes specified in MIL-S-19500 are applicable to this specification.

Custodians:
Army - EL
Navy - EC
Air Force - 17

Review activities:
Army - MI, MU
Navy -
Air Force - 80
DSA - ES

User activities:
Army - SM
Navy - AS, CG, OS, SH
Air Force - 13

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5961-0195-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:48Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)* | CITY AND STATE

CONTRACT NO. | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT $

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)* | DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:48Z
Check the source to verify that this is the current version before use.

NOTICE
OF VALIDATION

INCH-POUND

MIL-S-19500/237A
NOTICE 1
24 August 1988

MILITARY SPECIFICATION

SEMICONDUCTOR DEVICE, DIODE, SILICON, VIDEO DETECTOR
TYPE 1N32

MIL-S-19500/237A and amendment 3, dated 23 February 1981, remains inactive for new design. However, the document is valid for acquisition when needed.

Custodians:
Army - ER
Navy - EC
Air Force - 17

Review activities:
Army - AR, MI
Air Force - 11, 85, 99
DLA - ES

User activities:
Navy - AS, CG, MC, SH
Air Force - 13, 15

Preparing activity:
Navy - EC

Agent:
DLA - ES

AMSC N/A

FSC 5961

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-18T13:48Z
Check the source to verify that this is the current version before use.