MILITARY SPECIFICATION SHEET

COMPUTER SET, STANDARD AIRBORNE
CP-1502A/AYK-14(V)

This specification is approved for use by the Naval Air Systems Command, Department of the Navy and is available for use by all departments and agencies of the Department of Defense.

The complete requirements for acquiring the computer described herein shall consist of this specification and the latest issue of MIL-C-85518.

REQUIREMENTS:

System configuration:
SRA location - See Table I.

TABLE I. SRA location in the CP-1502A computer.

SRA	Chassis Location	MIL-C-85518 Reference
BEM	A01	3.6.2.2.2
DIM	A02	3.6.2.2.1.3
NTDS ANEW (C1)	A03	3.6.2.2.1.1.1
NTDS ANEW (C1)	A04	3.6.2.2.1.1.1
SIM-A	A05	3.6.2.2.1.2
NTDS ANEW (C1)	A06	3.6.2.2.1.1.1
IOP	A07	3.6.2.1.2
PSM	A08	3.6.2.1.1
GPM	A09	3.6.2.1.1
EAU	A10	3.6.2.1.4
MCM	A11	3.6.2.3.3
CMM-32	A12	3.6.2.3.1.1
CMM-32	A13	3.6.2.3.1.1
CMM-32	A14	3.6.2.3.1.1
CMM-32	A15	3.6.2.3.1.1
PCM-2	A16	3.6.2.4.2
Type 1 Chassis	-	3.6.2.5.1.1
Fan	-	3.6.2.5.2

Total weight: 60.5 lbs. maximum, excluding external cables.

Dimensions: Length 22.81 inches, width 10.125 inches, height 7.625 inches including fan but excluding front panel connectors and handles. See Figure 47 of MIL-C-85518.

Operating power: 115 volts ac, 400 Hz (3 phase WYE), 595 Watts/700 VA maximum.

Cooling fan: 115 volts ac, 400 Hz (3 phase WYE), 170 Watts/225 VA maximum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:01Z
Check the source to verify that this is the current version before use.

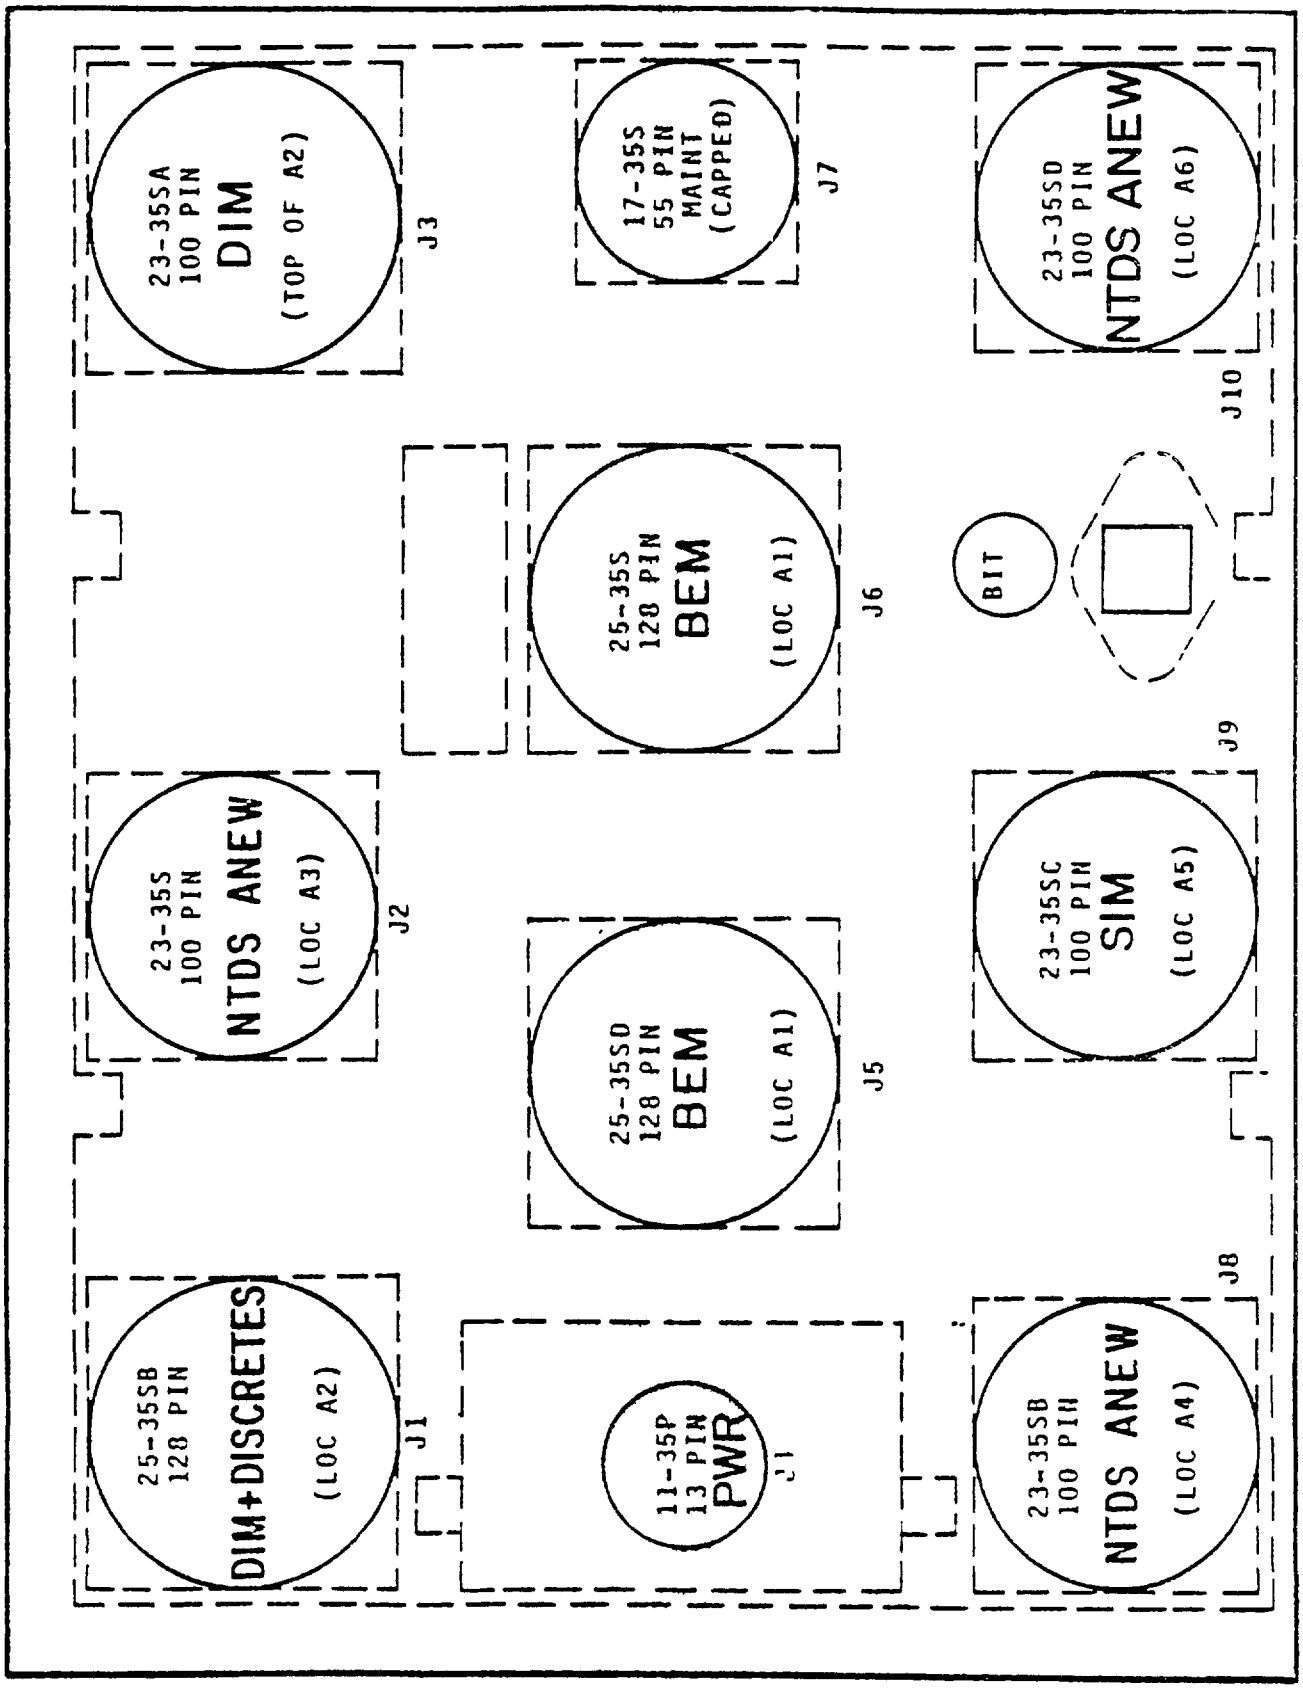


FIGURE 1. CP-1502A front panel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:01Z
Check the source to verify that this is the current version before use.

Reliability in mean-time-between-failure (MTBF): MTBF shall be 580 hours minimum when tested and accepted in accordance with 4.4.3.4 of MIL-C-85518.

Mean-time-to-repair (MTTR):
Intermediate level SRA replacement: MTTR shall be 22 minutes maximum.

Connector assignments: See Figure 1.

Service conditions: As specified in MIL-E-5400 for Class 1B equipment except the curve shall be extended to -55°C for low temperature operation.

Quality assurance provisions: With the exception of AET, when cooling air is required during tests specified in 4.2, 4.3, and 4.4 of MIL-C-85518, the air shall be supplied at a temperature in the range of -65°F to 120°F. The flow rate shall be adjusted to correspond to the selected inlet temperature, an exhaust temperature of 160°F, and the total heat load on the unit.

Application Information: Configuration CP-1503/AYK-14(V) may be used as an expansion chassis with this configuration.

Preparing Activity
Navy AS

(Project 7021-N005-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:01Z
Check the source to verify that this is the current version before use.