MILITARY SPECIFICATION SHEET

COMPUTER SET, STANDARD AIRBORNE
CP-1503/AYK-14(V)

This specification is approved for use by the Naval Air Systems Command, Department of the Navy and is available for use by all departments and agencies of the Department of Defense.

The complete requirements for acquiring the computer described herein shall consist of this specification and the latest issue of MIL-C-85518.

REQUIREMENTS:

System configuration:
SRA location - See Table I.

TABLE I. SRA location in the CP-1503 computer.

SRA	Chassis Location	MIL-C-85518 Reference
BEM	A01	3.6.2.2.2
-	A02	---
-	A03	---
RIM	A04	3.6.2.2.1.5
SIM-A	A05	3.6.2.2.1.2
NTDS ANEW (C1)	A06	3.6.2.2.1.1.1
	A07	
-	A08	--
IOP Jumper	A09	3.6.2.1.3
CMM-32	A10	3.6.2.3.1.1
CMM-32	A11	3.6.2.3.1.1
PCM-1	A12	3.6.2.4.1
Type 3 Chassis	-	3.6.2.5.1.2
Fan	-	3.6.2.5.2

Total weight: 35.0 lbs. maximum, excluding external cables.

Dimensions: Length 16.00 inches, width 10.125 inches, height 7.625 inches including fan but excluding front panel connectors and handles. See Figure 48 of MIL-C-85518.

Operating power: 115 volts ac, 400 Hz (3 phase (WYE), 210 Watts/250 VA maximum.

Cooling fan: 115 Volts ac, 400 Hz (3 phase WYE), 170 Watts/225 VA maximum.

Reliability in mean-time-between-failure (MTBF): MTBF shall be 1180 hours minimum when tested in accordance with 4.4.3.4 of MIL-C-85518.

FSC 7021

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:01Z
Check the source to verify that this is the current version before use.

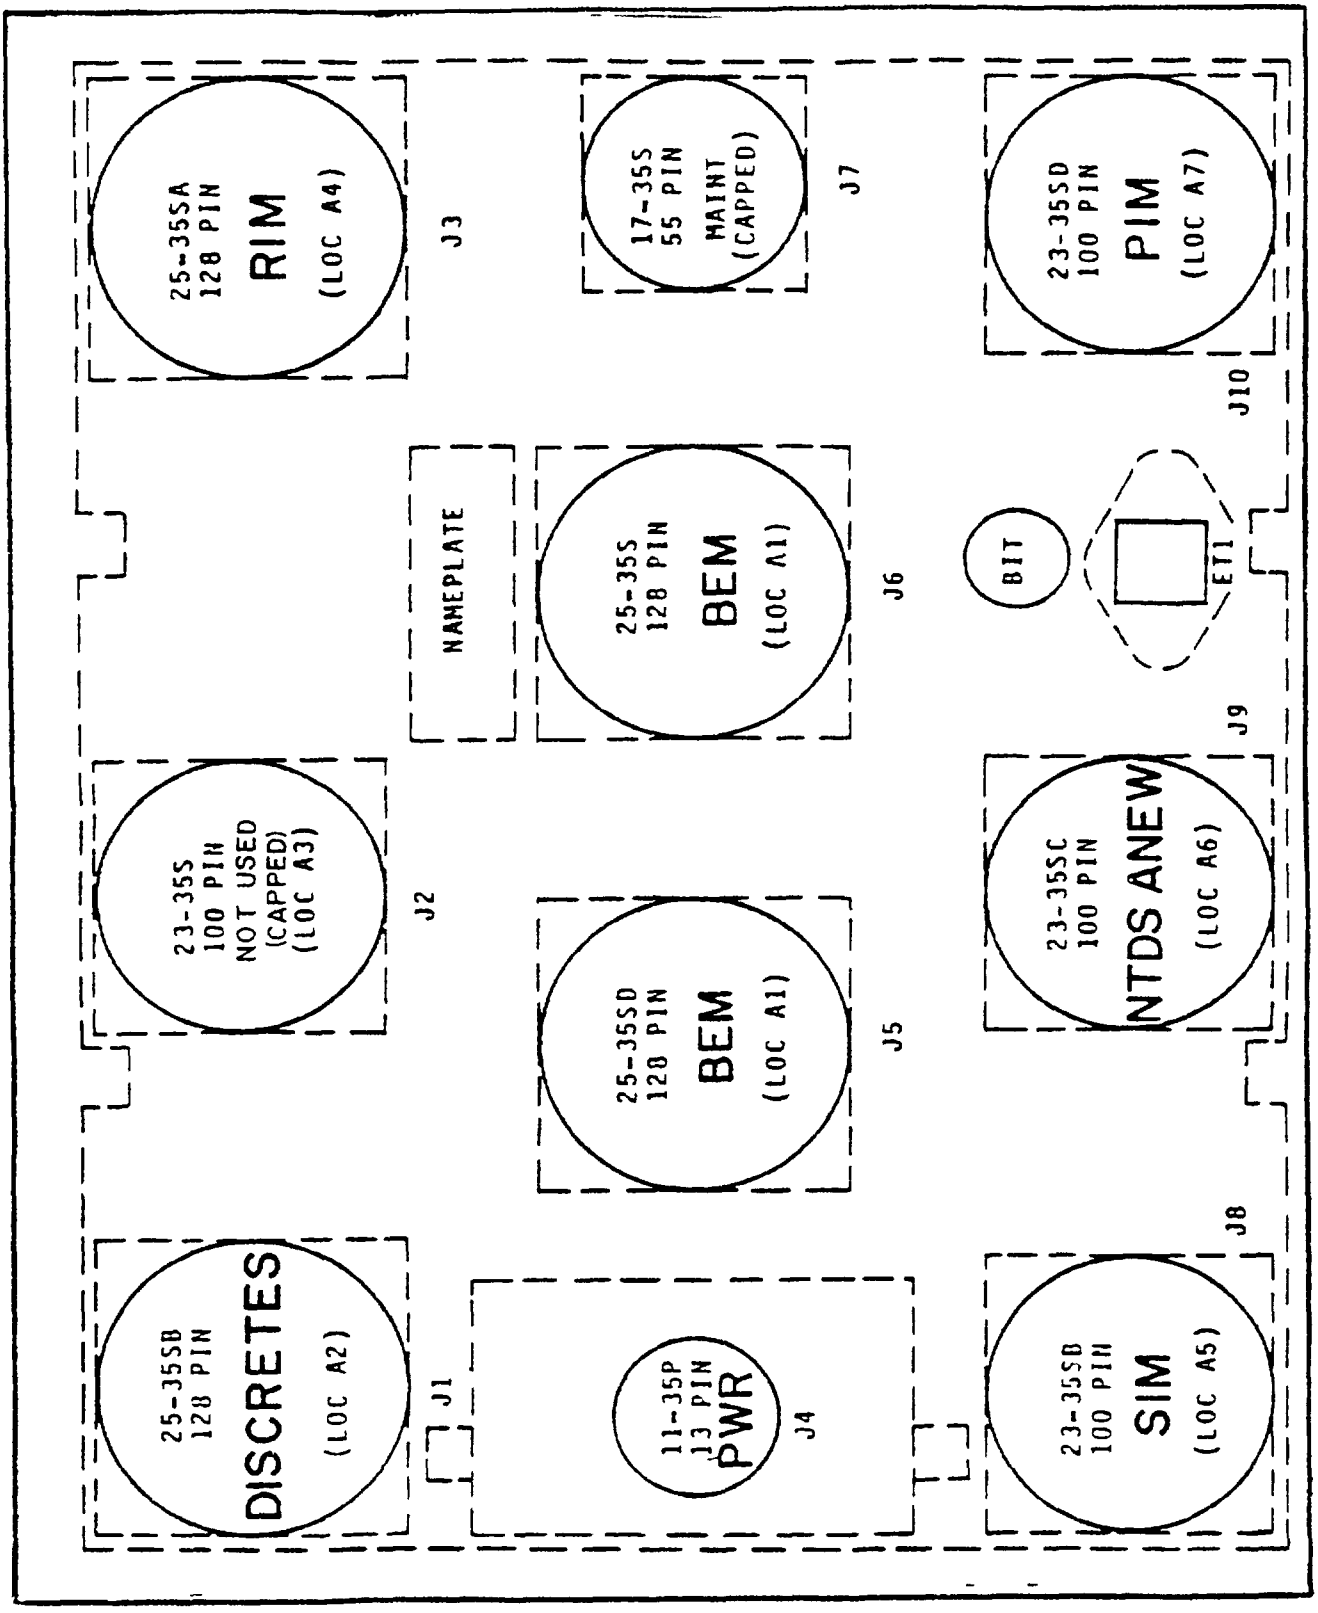


FIGURE 1. CP-1503 front panel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:01Z
Check the source to verify that this is the current version before use.

Mean-time-to-repair (MTTR):
Intermediate level SRA replacement: MTTR shall be 20 minutes maximum.

Connector assignments: See Figure 1.

Service conditions: As specified in MIL-E-5400 for Class 1B equipment except the curve shall be extended to -55°C for low temperature operation.

Quality assurance provision: With the exception of AET, when cooling air is required during tests specified in 4.2, 4.3, and 4.4 of MIL-C-85518, the air shall be supplied at a temperature in the range of -65°F to 120°F. The flow rate shall be adjusted to correspond to the selected inlet temperatures, an exhaust temperature of 160°F, and the total heat load on the unit.

Application Information: This configuration may be used as an expansion chassis for the CP-1502A/AYK-14(V) configuration.

Preparing Activity
Navy AS

(Project 7021-N005-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:01Z
Check the source to verify that this is the current version before use.