MILITARY SPECIFICATION

ANCHOR, GUY:

SHIELD, EXPANSION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers a guy anchor with an expansion shield for anchoring cables or guy wires to stone or masonry.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

PPP-H-1581	- Hardware (Fasteners and Related Items), Packaging and Packing for Shipment and Storage of.

STANDARDS

Federal

FED. STD. No. 66	- Steel, Chemical Composition and Hardenability.

Military

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-171	- Finishing of Metal and Wood Surfaces.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:34Z
Check the source to verify that this is the current version before use.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

B 69 - Rolled Zinc.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

NATIONAL BUREAU OF STANDARDS (NBS)

Handbook H-28 - Screw-Thread Standards for Federal Services.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, DC 20402.)

3. REQUIREMENTS

3.1 Description. The guy anchor shall be as shown in Figure 1 and as specified herein.

3.2 Material. Material shall be as specified herein.

3.2.1 Eyebolt. The eyebolt shall be manufactured from forged steel with a minimum breaking strength of 13,500 pounds.

3.2.2 Expansion shield. The expansion shield shall be manufactured from rolled zinc conforming to ASTM B 69, type optional.

3.2.3 Cone expanders. The cone expanders shall be manufactured from steel conforming to FED. STD. No. 66, Composition 1035.

3.3 Screw threads. Screw threads for cone expanders shall be .625 - 11 NC - 2 B, and screw threads for eyebolt shall be .625 - 11 NC - 2 A, in accordance with Handbook H-28.

3.4 Finish. Unless otherwise specified (see 6.2), steel parts of the guy anchor shall be either zinc-coated in accordance with Finish 1.9.5

Source: https://assist.dla.mil -- Downloaded: 20261O-22T21:34Z
Check the source to verify that this is the current version before use.

of MIL-STD-171 or cadmium-coated in accordance with Finish 1.1.7 of MIL-STD-171.

3.5 Identification marking. The expansion shield shall be identified in accordance with MIL-STD-130.

3.6 Workmanship.

3.6.1 Forgings. All parts of the expansion shield which include forgings shall be clean of harmful extraneous material such as sand, dirt, sprues, scale, and flux. Rework shall be limited to procedures which do not reduce strength or affect function.

3.6.2 Metal fabrication. Metal used in fabrication shall be free from kinks and sharp bends. The straightening of material shall be done by methods that will not cause injury to the material. Corners shall be square and true. Flame cutting, using tips suitable for the thickness of the steel, may be employed instead of shearing and sawing. All bends shall be made with controlled means to insure uniformity of size and shape. Precaution shall be taken to avoid overheating. Heated steel shall be allowed to cool slowly. External surfaces shall be free of burrs, sharp edges and corners, except when sharp edges or corners are required or where they are not detrimental to safety.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Material inspection. The supplier is responsible for insuring that materials used are manufactured and examined in accordance with referenced specifications and standards.

4.2 Classification of inspections. Inspections shall be classified as follows:

(a) Quality conformance inspection (see 4.3).
(b) Inspection of preparation for delivery (see 4.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.

4.3 Quality conformance inspection.

4.3.1 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.3.2 Examination.

4.3.2.1 Samples. Samples selected in accordance with 4.3.1 shall be examined for the major and minor defects specified in 4.4.1. The AQL shall be 0.4 percent defective for major defects and 4.0 percent defective for minor defects.

4.4 Inspection procedure.

4.4.1 Examination. The guy anchor shall be examined as specified herein for the following defects:

Major

101. Guy anchor not in accordance with Figure 1.
102. Material not as specified.
103. Screw threads not as specified.
104. Finish not as specified.
105. Workmanship not as specified.

Minor

201. Identification marking missing, incomplete, or illegible.

4.5 Inspection of preparation for delivery. Preparation for delivery requirements shall be examined in accordance with the applicable Section 4 requirements of PPP-H-1581.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, and packing. The guy anchor shall be preserved, packaged, and packed in accordance with PPP-H-1581. The level of preservation and packaging shall be Level A or C and the level of packing shall be Level A, B, or C as specified (see 6.2).

5.2 Marking. In addition to any special marking requirement by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:34Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The guy anchor is intended to provide a solid anchor to stone or masonry for cables or guy wires of tramways, cableways, and other equipment. NSN 5340-00-598-3510 which is used in Equipment Sets 5420-97-CL-E06, 5420-97-CL-E07, 5420-97-CL-E08, and 5420-97-CL-E32 applies thereto. This specification is intended to replace CE PD-248 dated 19 January 1955.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Finish, if other than as specified (see 3.4).
(c) Level of preservation and packaging and level of packing required (see 5.1).

6.3 Installation. Guy anchors should be set in masonry in accordance with the instructions of their manufacturers. The holes should be of the recommended diameter and depth and should be drilled by the drills recommended by the manufacturer. The drilled holes should be left rough, not reamed, and free from any drill dust.

Custodian:

Army - ME


Preparing activity:

Army - ME

Project No. 5340-A026

☆U.S. GOVERNMENT PRINTING OFFICE: 1974-603-108/407

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.

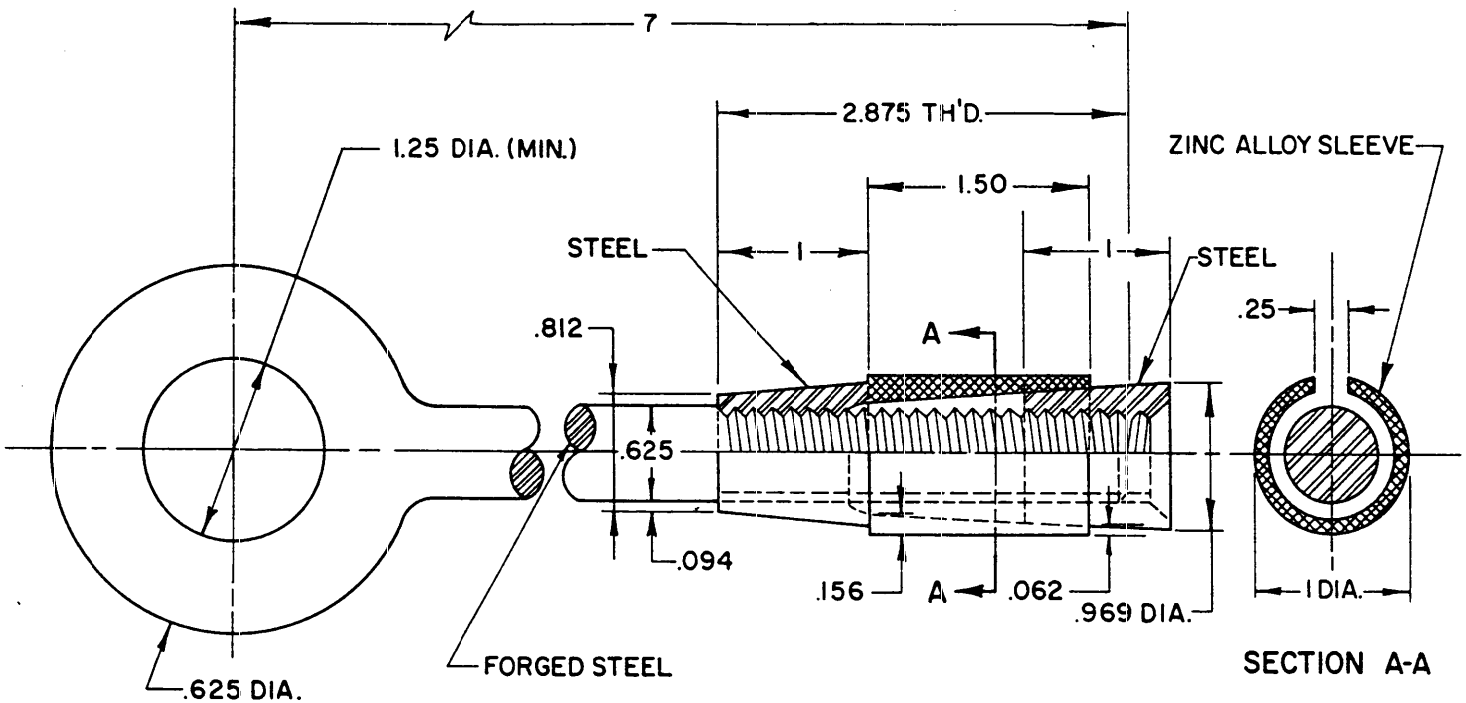

NOTE:
ALL DIMENSIONS ARE
IN INCHES.

FIGURE 1. ANCHOR, GUY, FOR TRAMWAYS AND CABLEWAYS

X-2855

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:34Z
Check the source to verify that this is the current version before use.