
MILITARY SPECIFICATION SHEET


BEARING, FIBER REINFORCED PLASTIC, SLEEVE, FLANGED, SELF-LUBRICATING, +250°F

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The complete requirements for procuring the bearing described herein shall consist of this document and the latest issue of MIL-B-85560.

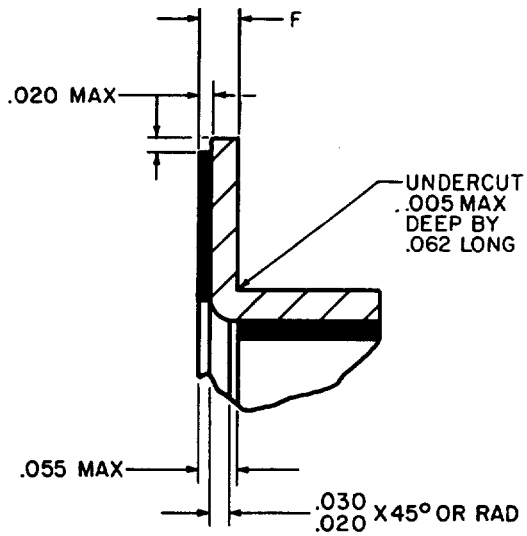

DETAIL A

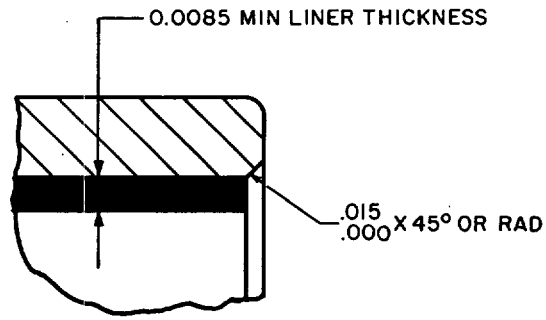

DETAIL B

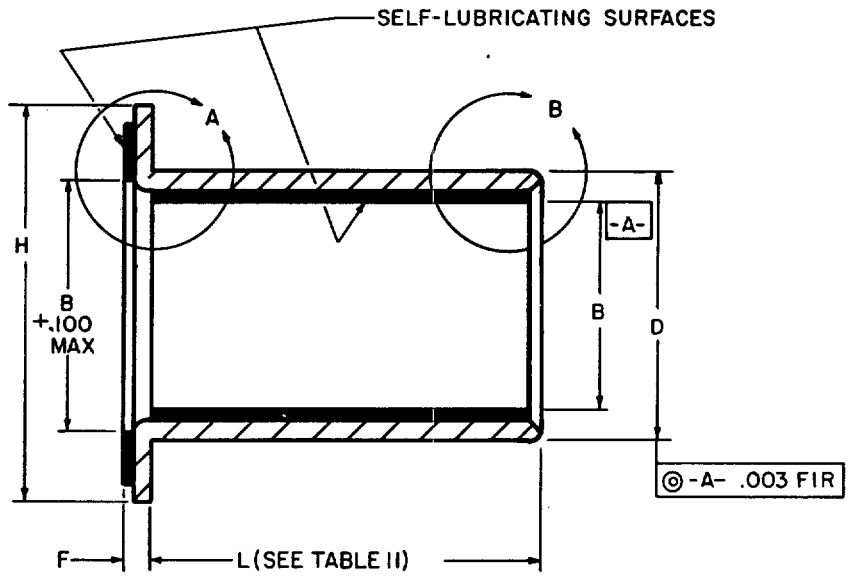

FSC 3120

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:04Z
Check the source to verify that this is the current version before use.

DASH NO.	NOMINAL BORE SIZE	B DIA. +.0000 -.0010	D DIA. +.0005 -.0005	F +.000 -.005	H DIA. +.000 -.020
-04	1/4	.2515	.3760	.0625	.750
-05	5/16	.3140	.4386	.0625	.812
-06	3/8	.3765	.5012	.0625	.875
-07	7/16	.4390	.5638	.0625	.937
-08	1/2	.5015	.6265	.0625	1.000
-09	9/16	.5640	.6892	.0625	1.125
-10	5/8	.6265	.8142	.0625	1.250
-11	11/16	.6890	.8767	.0625	1.375
-12	3/4	.7515	.9393	.0625	1.500
-14	7/8	.8765	1.0645	.0625	1.625
-16	1	1.0015	1.1898	.0625	1.750
-18	1-1/8	1.1265	1.3148	.0937	1.875
-20	1-1/4	1.2515	1.4398	.0937	2.000
-22	1-3/8	1.3765	1.5648	.0937	2.125
-24	1-1/2	1.5015	1.7523	.0937	2.250
-26	1-5/8	1.6265	1.8773	.0937	2.375
-28	1-3/4	1.7515	2.0023	.0937	2.500
-32	2	2.0015	2.2523	.0937	2.750

TABLE I. Dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:04Z
Check the source to verify that this is the current version before use.

Material: Composite: Glass or aramid fibers in resin matrix.
Self-lubricating surface: Tetrafluoroethylene per MIL-B-85560.

Surface Texture: Unless otherwise specified, smooth machine finish R_a 63 micro-inch on O.D., R_a 125 micro-inch on all other surfaces in accordance with ANSI B46.1. Surface texture of self-lubricating surface is not specified.


Temperature Range: $-65^{\circ}F$ to $+250^{\circ}F$.

Break sharp edges and corners and remove all burrs and slivers.

Unless otherwise specified, dimensions in inches.

Example of Part Number:

M 85560/2 -04 -008 = 1/4 inch bore diameter x 1/4 inch long

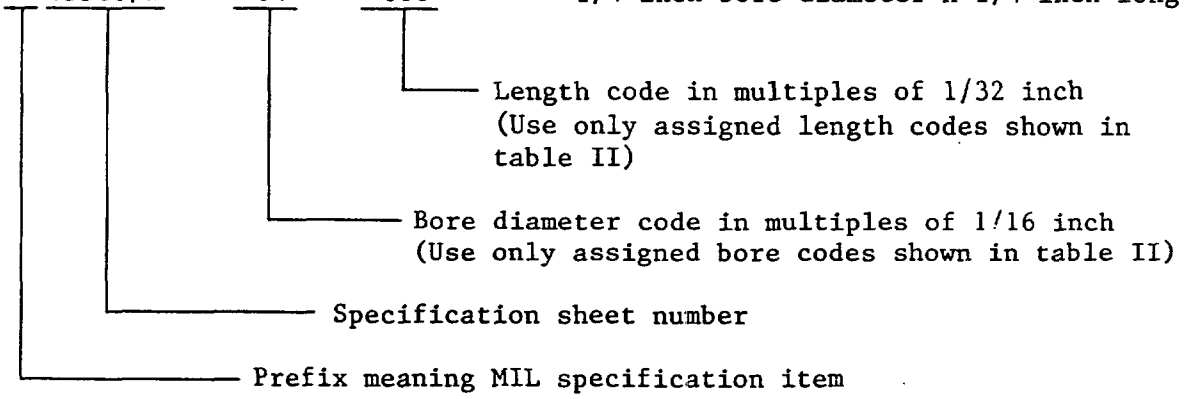

Marking: For dash number 08 and larger, the military part number shall be marked on the part.

Load Ratings:

Radial static limit load = 50,000 x B x (L + F - .13) lb

Dynamic radial load = 25,000 x B x (L + F - .13) lb

Custodians:
Army - AV
Navy - AS
Air Force - 11

Review Activities:
Army - AR
Navy - SH
Air Force - 99
DLA - IS

Preparing Activity:
Navy - AS
(Project No. 3120-0600)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:04Z
Check the source to verify that this is the current version before use.

DASH NO.	NOMINAL SIZE	LENGTH L +.000 -.010																										
		1/4	9/32	5/16	11/32	3/8	7/16	1/2	9/16	5/8	11/16	3/4	7/8	1	1 1/8	1 1/4	1 3/8	1 1/2	1 5/8	1 3/4	1 7/8	2	2 1/8	2 1/4	2 3/8	2 1/2	2 3/4	3
-04	1/4	008	009	010	011	012	014																					
-05	5/16	008	009	010	011	012	014	016	018																			
-06	3/8	008	009	010	011	012	014	016	018	020	022																	
-07	7/16	008	009	010	011	012	014	016	018	020	022	024	028															
-08	1/2	008	009	010	011	012	014	016	018	020	022	024	028															
-09	9/16	008	009	010	011	012	014	016	018	020	022	024	028	032	036													
-10	5/8	008	009	010	011	012	014	016	018	020	022	024	028	032	036	040	044											
-11	11/16	008	009	010	011	012	014	016	018	020	022	024	028	032	036	040	044	048	052									
-12	3/4	008	009	010	011	012	014	016	018	020	022	024	028	032	036	040	044	048	052									
-14	7/8	008	009	010	011	012	014	016	018	020	022	024	028	032	036	040	044	048	052									
-16	1	008	009	010	011	012	014	016	018	020	022	024	028	032	036	040	044	048	052	056	060							
-18	1 1/8			010	011	012	014	016	018	020	022	024	028	032	036	040	044	048	052	056	060							
-20	1 1/4					012	014	016	018	020	022	024	028	032	036	040	044	048	052	056	060	064	068					
-22	1 3/8					012	014	016	018	020	022	024	028	032	036	040	044	048	052	056	060	064	068					
-24	1 1/2					012	014	016	018	020	022	024	028	032	036	040	044	048	052	056	060	064	068	072	076	080	088	
-26	1 5/8							016	018	020	022	024	028	032	036	040	044	048	052	056	060	064	068	072	076	080	088	096
-28	1 3/4							016	018	020	022	024	028	032	036	040	044	048	052	056	060	064	068	072	076	080	088	096
-32	2							016	018	020	022	024	028	032	036	040	044	048	052	056	060	064	068	072	076	080	088	096

TABLE II. Length codes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:04Z
Check the source to verify that this is the current version before use.