MILITARY SPECIFICATION

SURVIVAL KIT CONTAINERS, CNU-129(V)/P AND CNU-130/P

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers survival kit containers for aircraft. The survival kit containers are designated CNU-129(V)1/P, CNU-129(V)2/P, and CNU-130/P (see 3.5 and 6.2].

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

L-P-383	Plastic Material, Polyester Resin, Glass Fiber Base Low Pressure Laminated

Military

	Preservation-Packaging, Methods of
	Webbing, Textile, Woven Nylon
	Surfaces Treatments and Inorganic Coatings for Metal Surfaces of Weapons Systems
	Wire Rope, Steel, (Corrosion-Resistant) Flexible, Preformed (for Aeronautical Use)
MIL-W-5625	Webbing, Textile, Nylon, Tubular
MIL-C-5688	Cable Assemblies: Aircraft, Proof Testing and Prestretching of
MIL-C-6021	Castings, Classification and Inspection of
MIL-T-6117	Terminal-Cable Assemblies, Swaged Type
MIL-J-6858	Welding, Resistance: Aluminum, Magnesium, Nonhardening Steels or Alloys, Nickel Alloys, Heat-Resisting Alloys, and Titanium Alloys; Spot and Seam
MIL-R-7575	Resin, Polyester, Low-Pressure Laminating
MIL-S-7742	Screw Threads, Standard, Optimum Selected Series: General Specification for
MIL-I-8500	Interchangeability and Replaceability of Component Parts for Aerospace Vehicles

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

MIL-T-8504	Tubing Steel, Corrosion-Resistant [304), Aerospace Vehicle Hydraulic Systems, Annealed, Seamless and Welded
MIL-W-8611	Welding, Metal Arc and Gas, Steels, and Corrosion and Heat Resistant Alloys; Process for
MIL-A-8625	Anodic Coatings, for Aluminum and Aluminum Alloys
MIL-R-9300	Resin, Epoxy, Low-Pressure Laminating
MIL-P-9400	Plastic Laminate Materials and Sandwich Construction, Glass Fiber Base, Low Pressure Aircraft Structural, Process Specification Requirements
MIL-C-25918	Catridge Actuated Devices, Aircraft Crew Emergency Escape, General Specification for
MIL-O-27335	Oxygen System, Survival Container-Oxygen Kit, General Specification for
MIL-S-83862	Strap, Retention, Survival Kit
MIL-S-83863	Spacer Assembly, Survival Container Parachute Support
MIL-C-83864	Container, Inner, Survival Kit

FED-STD-406	Plastics: Methods of Testing
FED-STD-595	Colors

MIL-STD-100	Engineering Drawing Practices
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of US Military Property
MIL-STD-143	Standards and Specifications, Order of Precedence for the Selection of
	Parts and Equipment, Procedures for Packaging and Packing of
	Environmental Test Methods
	Test Reports, Preparation of
	Escape System Testing: Ground, Track, and Flight Test
	Dissimiler Metals
	Compass - Magnetic Pilots Standby

Air Force

50C7024	Parachute Assembly - Personnel, Back
64C43333	Strap Assembly, Adjustment
72292	Cushion-Seat, Aircraft Survival Kit CHU-12/P
72294	Cushion-Seat, Aircraft Survival Kit CHU-13/P

Source: https://assist.dla.mil -- Downloaded: 202610-23T08:06Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following drawings of U.S.S. Chemicals Div, Michigan City, Indiana; Air Lock, Inc., Milford, Connecticut; and General American Research Div, General American Transportation Corp., Plastics Division, Niles, Illinois form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

U.S.S. Chemicals Div (Code Identification 29807)

RP 784-00	Survival Kit Container CNU-129/P
RP 785-00	Survival Kit Container CNU-130/P

Air Lock, Inc. (Code Identification 97375)

918-2800	Lower Actuating Cable Assembly
918-2900	Upper Actuating Cable Assembly

General American Research Division (Code Identification 19190)

1462C6000	Cartridge, 4 Sec Delay

(Copies of these drawings can be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS


3.1 First article. This specification makes provisions for first article testing (see 4.4 and 6.2).

3.2 Major components. The major components of the survival kit containers shall be as shown on figure 1 and shall include the parachute deployment sensing cable assembly (see 3.6.5) that is listed but not shown on figure 1.

3.3 Selection of specifications and standards. Specifications and standards for necessary commodities and services not specified herein shall be selected in accordance with MIL-STD-143.

3.4 Materials. Nonmagnetic materials shall be used for all components except where magnetic materials offer definite advantages. Materials that are not susceptible to fungus attack shall be used to the greatest extent practicable, Materials that are susceptible to fungus attack, if used, shall be treated with a fungicidal agent. The materials used in the constrction of the components of the survival kit container shall be the lightest possible weight consistent with configuration, strength, and any other requirements specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

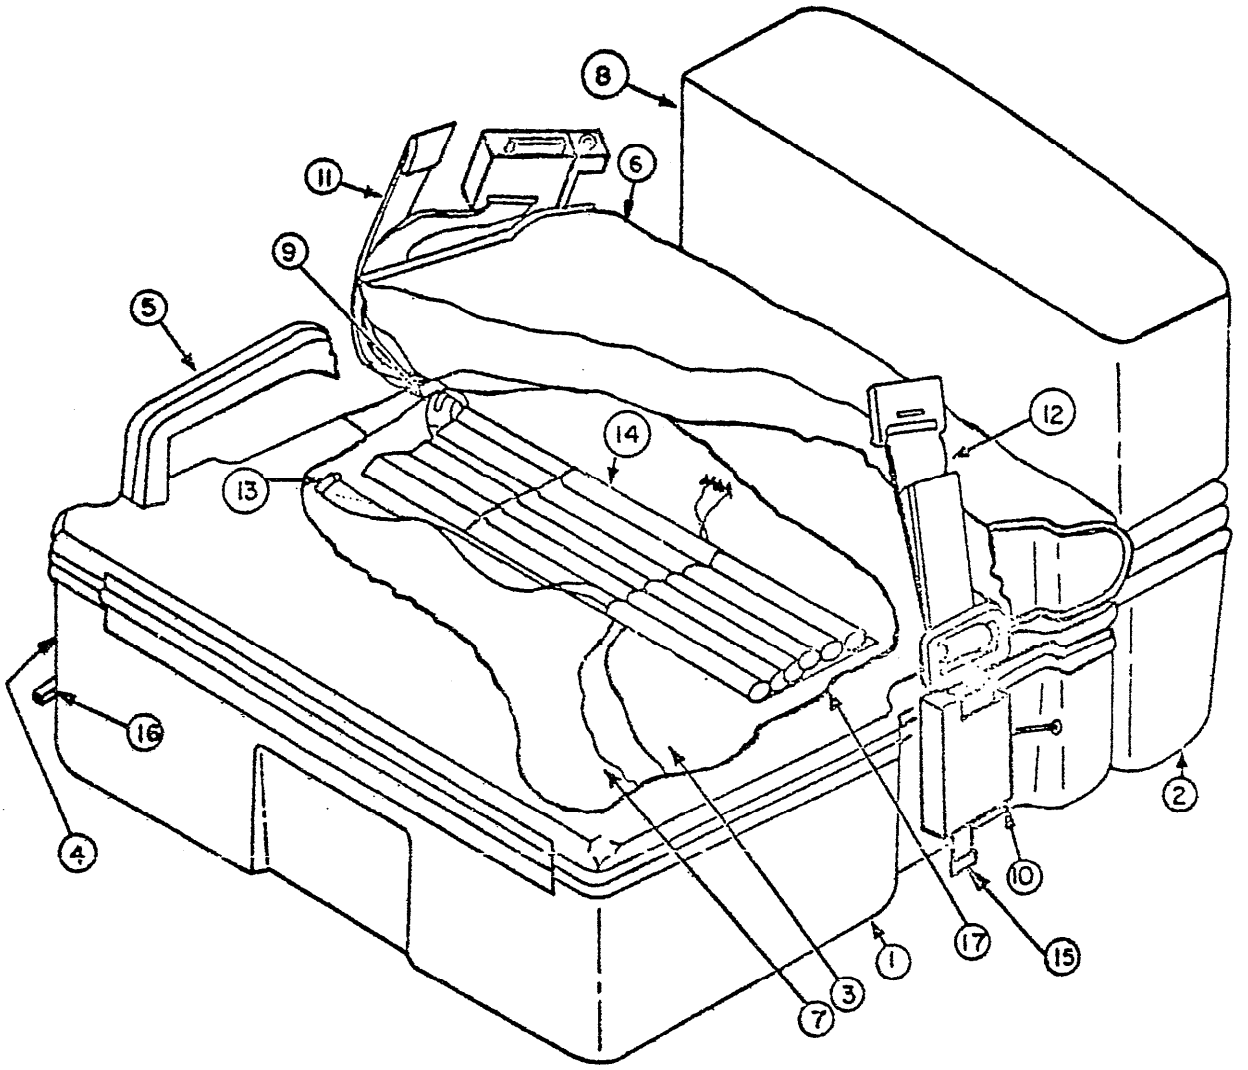

1 FORWARD COMPARTMENT OF CONTAINER
2 AFT COMPARTMENT OF CONTAINER
3 INNER CONTAINER
4 AUTOMATIC ACTUATOR (INCLUDING CARTRIDGE)
5 HANDLE CONTAINER OPERATING (EMERGENCY RELEASE)
6 CUSHION
7 RAFT RETAINER
8 PARACHUTE SUPPORT
9 RIGHT-HAND HARNESS ATTACHMENT STRAP SIDE RELEASE AND LID LOCK ASSEMBLY
10 LEFT-HAND HARNESS ATTACHMENT STRAP SIDE RELEASE & LID LOCK ASSEMBLY
11 RIGHT-HAND ATTACHMENT STRAP
12 LEFT-HAND ATTACHMENT STRAP
13 DROPLINE
14 DROPLINE CONTAINER
15 DROPLINE CONNECTING PLUNGER DEVICE
16 OVERRIDE SELECTOR
17 FORWARD COMPARTMENT LID
18 PARACHUTE DEPLOYMENT SENSING CABLE ASSEMBLY (NOT SHOWN)

FIGURE 1 Survival Kit Container

Source: https://assist.dla.mil -- Downloaded: 202610-23T08:06Z
Check the source to verify that this is the current version before use.

3.4.1 Metals. Metals shall be corrosion resistance or suitably treated to resist c-n due to fuels, salt spray, or atmospheric conditions likely to be met in storage or normal service.

3.4.1.1 Dissimililar metals. Unless suitably protected against electrolytic corrosion, dissimilar metals shall not be used in intimate contact with each other. Dissimilar metals are defined in MIL-STD-889.

3.4.2 Nonmetallic materials. The use of nonmetallic materials shall require approval, by the procuring activity, for the specific application involved.

3.4.2.1 Fiber glass material. If fiber glass material is used in the construction of the basic container, it shall be manufactured in accordance with the requirements of MIL-P-9400. The fiber glass material shall meet the physical requirements of table I of this specification and the workmanship requirements of L-P-383. Glass cloth, if used, shall be preimpregnated cloth. Resins shall be in accordance with MIL-R-7575 or MIL-R-9300 for polyester resin or epoxy resin, respectively.

TABLE I. Physical Properties of Fiber Glass

Characteristic	Cloth	Mat and Roving
Flex strength, pounds per square inch (psi), minimum	60,000	30,000
Flex modulus, minimum	3.0×10^6	1.1×10^6
Tensile strength, psi, minimum	47,000	22,000
Compressive strength, psi, minimum	45,000	20,000
Moisture absorption, percent per 24 hours, maximum	0.5	1.0
Impact strength, unnotched, foot-pounds per inch, minimum	25	20

3.4.3 Protective treatment. If materials that are subject to deterioration When exposed to climatic and environmental conditions likely to occur during service usage are used in the construction of the basic container, the materials shall be protected against such deterioration in a manner that will not in any way prevent compliance with the performance requirements of this specification, The usc of any protective coating that will crack, chip, or scale with age or extreme climatic and environmental conditions shall be avoided,

Source: https://assist.dla.mil -- Downloaded: 202610-23T08:06Z
Check the source to verify that this is the currentversion before use.

3.4.3.1 Aluminum parts. All aluminum parts shall be anodized in accordance with MIL-A-8625. All exposed parts shall be processed after anodizing with a potassium bichromate seal and dyed a neutral color suitable to the procuring activity,

3.4.3.2 Steel parts. All steel parts shall be cadmium or zinc plated in accordance with applicable specifications unless the part is made of corrosion-resistant steel or has been otherwise protected in accordance with MIL-S-5002.

3.5 Design and construction. Unless otherwise specified herein, the CNU-129(V)l/P survival kit container and the CNU-129(V)2/P survival kit container shall be designed and constructed in accordance with U.S.S. Chemicals Div Drawing RP 784-00 and the applicable detail drawings referenced thereon. Unless otherwise specified herein, the CNU-130/P survival kit container shall be designed and constructed in accordance with U.S.S. Chemicals Div Drawing RP 785-00 and the applicable detail drawings referenced thereon, The parachute support [see item 8 of figure 1) shall conform to MIL-S-83863. The main differences in the survival kit containers are in the cushions (see 3,6.6) and in the oxygen system provisions. The oxygen system provisions are applicable to the CNU-130/P survival kit container only and consist of a mounting plate, a disconnect release cable, support pads, and disconnect cutouts for the installation of a drop-in oxygen system that conforms to MIL-O-27335.

3.5.1 Operation. The following operations shall be allowed by the survival kit container.

(a) Removal of the survival kit container from the aircraft for maintenance: The manual override selector lever of the automatic actuator shall be used as the safety mechanism of the actuator firing pin during maintenance handling to prevent accidental automatic operation.

(b) Normal egress from the aircraft after a flight, taking the parachute and leaving the survival kit container in the aircraft: Disconnection of the survival kit container, including the parachute deployment sensing cable assembly shall be made at the parachute accessory rings.

(c) Emergency egress from the aircraft on the ground, in the water, etc: Operation of the lap belt buckle, will release the man from the seat. The survival kit container may be removed or may remain in the aircraft based upon the user's decision. When the survival kit container is to be left in the aircraft, the emergency release handle shall permit manual actuation of the survival kit container to release all connections between the survival kit container and the user and the parachute. The life raft shall not be actuated. The survival kit container dropline attachment fitting shall remain with the portion of hardware remaining with the survival kit container. The automatic actuator parachute deployment sensing cable shall separate from the parachute harness automatically with the right hand attachment strap side release.

Source: https://assist.dla.mil -- Downloaded: 202610-23T08:06Z
Check the source to verify that this is the current version before use.

(d) Ejection with subsequent manual or automatic release of the survival kit container from the man followed by inflation of the life raft. The life raft and survival equipment shall be secured to the man by means of a dropline. This operation shall be accomplished in the following steps:

(1) Separation of the survival kit container from the seat shall automatically connect the dropline to the portion of the survival kit container hardware remaining attached to the personnel parachute harness accessory ring after survival kit container deployment. The parachute canopy will automatically. deploy and fully inflate. As the canopy risers deploy from the parachute pack, the parachute deployment sensing cable shall be pulled and shall separate and initiate the automatic actuator and cause survival kit container hardware operation 4 seconds (plus or minus 1 second) after parachute deployment sensing cable operation unless the override selector prevents operation. There shall not be any possible interference due to snagging or jamming of the survival kit container with any parts of the seat.

(2) Automatic actuation or a manual pull of the survival kit container operating handle shall separate the survival kit container from the man and unlock the lid. The upper end of the dropline shall be retained with the personnel parachute harness. The life raft inflation system shall be actuated by dropline deployment. The inner container and lower container shall be retained at the bottom of the dropline.

3.5.2 Welding. Welding shall be accomplished in accordance with MIL-W-8611 or MIL-W-6858 or both.

3.5.3 Castings. Castings shall be designed and inspected in accordance with MIL-C-6021. Casting shall not be used in application where failure could result in loss of the survival kit container during ejection

3.5.1 Safety All threaded parts shall be positively locked by self-locking nuts or any other approved methods. Safety wire shall not be considered an approved method.

3.5.5 Swaging Swaging shall be done in accordance with MIL-T-6117 and shall be carefully. Each swaging operation shall be proof testted to 100 pounds or three times the maximum service load, whichever is greater.

3.5.6 Threads. Except for permanently installed pipe threaded plugs, or as necessitated by functional purposes and unless otherwise specified in the applicable documents, only straight threads conforming to Unified Thread Series, class 3A or 3B of MIL-S-7742 shall be used.

3.5.7 Hardware. All hardwaere that could come in contact with the inner cotainer of the container and the life raft during deployment as in service operation shall be smooth and free of sharp edges or protecrusions. Decals to show operation procedures for the hardware shall be used where necessary.

Source: https://assist.dla.mil -- Downloaded: 202610-23T08:06Z
Check the source to verify that this is the current version before use.

3.6 Details of components

3.6.1 Basic container. The basic container shall provide a minimum interior volume consistent with the requirements specified-herein. Where it is necessary to provide holes in the basic container, there shall be no interstices greater than 1/16 inch. This requirement shall also apply to the lid parting lines with the basic container packed with equipment. The basic container shall be built so that the parts will not work loose in service and shall withstand the strains, jars, and-any other conditions incident to shipment, storage, installation, and service without failure. The top surface of the lid shall be furnished with cushion attachment provisions to mate with the cushion specified in 3.6.6.

3.6.2 Inner container. The inner container shall conform to MIL-C-83864.

3.6.3 Retention straps. Two retention straps to retain the inner container after deployment and during parachute descent shall be installed diagonally in the survival kit container. The retention straps shall conform to MIL-S-83862.

3.6.4 Automatic actuator. The automatic actuator shall be designed as a cartridge actuated device in accordance with MIL-C-25918, shall be constructed so that-parts will not work loose in service, and shall meet the requirements specified herein. The automatic actuator shall have a cartridge to control actuation with respect to time after parachute deployment and to provide the power to operate the hardware of the survival kit container. The automatic actuator shall be operated by a parachute deployment sensing cable assembly that will release the actuator firing pin to fire the cartridge when the parachute canopy risers are deployed from the pack.

3.6.4.1 Cartridge. The cartridge shall be a 4-second (plus or minus l-second] time delay, percussion-type, expansible, closed system cartridge (a cartridge that deforms but does not rupture upon firing). The cartridge shall conform to General American Research Div Drawing 1462C6000.

3.6.5 Parachute deployment sensing cable assembly. The parachute deployment sensing cable assembly shall consist of an upper actuating cable assembly to be mounted on the automatic back style personnel parachute covered by the -22 configuration on Drawing 50C7024 and of a lower actuating cable assembly to be mounted on the survival kit container. The upper actuating cable assembly and the lower actuating cable assembly shall conform to Air Lock, Inc. Drawings 918-2900 and 918-2800, respectively.

3.6.6 Cushion. The cushion for the CNU-129(V)1/P survival kit container shall conform to Drawing 72292. The cushipm for the CNU-129(V)2/P survival kit container shall conform to the -30 configuration on Drawing 72294. The cushion for the CNU-130/P survival kit container shall conform to the -10 configuration on Drawing 72294.

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T08:06Z
Check the source to verify that this is the current version before use.

3.6.7 Control cables. The control cables shall be fabricated of cable conforming to MIL-W-5424 and shall be tested and prestretched in accordance with MIL-C-5688. **Any** control cable adjustments necessary for manufacturing shall be permanently locked after rigging. The control cables shall be properly installed. Where necessary to prevent inadvertent actuation or damage to the control cables by the contents or flexure of the survival kit container, the control cables shall be enclosed in tubing conforming to MIL-T-8504. All control cables shall be properly guarded to prevent wearing or fraying during the continued use of the survival kit container,

3.6.8 Adjustment strap assembly. The adjustment strap assembly shall conform to Drawing 64C43333 except that green webbing conforming to type VI of MIL-W-4088 shall be used and that the webbing shall be stitched along the perimeter only in the adjustable portion. The webbing end stop may be furnished ***in*** any suitable design that will prevent pulling of the webbing end through the adjuster and snagging on the seat but that will permit easy removal and replacement of the adjustment strap assembly. **The** strap ends shall be seared to prevent fraying.

3,6.9 Dropline. The dropline to retain the inner container (packed with 35 pounds of survival equipment] and the inflated LRU-6/P one-man life raft to the individual during parachute descent shall be constructed of 3/4-inch-wide, natural-color webbing conforming to MIL-W-5625 in accordance with U.S.S. Chemicals Div Drawing RP 755-32.

3.6.10 **Operating** handle. **The operating** handle shall **unlock with a** pull of 30 pounds (plus or minus S pounds), Unless otherwise specified herein, a maximum pull of 15 pounds shall be required to free the operating handle from the survival kit container under both parachute descent and emergency ground egress operating conditions. During and after the subjection of the survival kit container to the environmental conditions described under 3.7.1, a maximum pull of 30 pounds shall be required to free the operating handle from the survival kit container under both parachute descent and emergency ground egress operating conditions.

3.7 Performance

3.7.1 Environmental conditions. The hardware of the survival kit container shall operate satisfactorily as specified in 3.7.2.1 and 3.7.2.2 under the following enviromental conditions:

(a) While the survival kit container is subjected to a temperature of plus 160 degrees Fahrenheit

(b) After the survival kit container has been subjected to temperature shock

(c) While the survival kit container is subjected to a temperature of minus 65 degrees Fahrenheit

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

(d) During and after exposure of the survival kit container to dust

(e) During and after exposure of the survival kit container to humidity

(f} During and after exposure of the survival kit container to salt atmosphere

(g) During and after exposure of the survival kit container to vibration

(h) After the survival kit container has been subjected to shock.

3.7.2 Hardware operation

3.7.2.1 Parachute descent. When the operating handle is activated by the force specified in 3.6.10 while in the parachute descent mode, the hardware of the survival kit container shall accomplish “the following actions:

(a) Separate the survival kit container from the man

(b) Open the lid locks

(c) Actuate the life raft by dropline deployment

(d) Couple the dropline to the parachute harness attaching hardware.

3.7.2.2 Emergency ground egress. When the force specified in 3.6,10 is applied to the operating handle during emergency ground egress, the hardware of the survival kit container shall accomplish the following actions:

(a) Separate the survival kit container from the man

(b) Open the lid locks

3.7.2.3 Automatic operation. The parachute deployment sensing cable device between the survival kit container actuator and the canopy riser shall operate and separate from the automatic actuator with a maximum force of 50 pounds, measured at the canopy riser, applied in any direction. The automatic actuator shall be operated by the parachute deployment sensing cable assembly, The parachute deployment sensing cable assembly shall release the actuator firing pin to fire the cartridge when the parachute canopy risers are deployed from the pack. The hardware of the survival kit container shall operate 4 seconds (plus or minus 1 second) after the automatic actuator has fired the cartridge. It shall not be possible to install the right side attachment hardware if the actuator has not been reset after an operation. The parachute deployment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

sensing cable assembly shall resist the effects of service conditions so that accidental actuation or failure due to wear or interference from associated objects shall not occur.

3.7.3 Interchangeability of critical parts. All critical parts of the survival kit containers such as the lids, the cushions of the same part number, the operating handles, and the survival kit container attaching hardware shall be interchangeable in accordance with MIL-I-8500.

3.7.4 Proof loads. After the proof loads specified in 3.7.12.1.1, 3.7.12,2, 3.7.12.4, and 3.7.12.6 have been applied to the survival kit container, the . survival kit container shall operate as specified in 3.7.2.l and 3.7.2.2 and shall not be damaged nor permanently deformed.

3.7.5 Lid retention

3.7.5.1 Lid locking mechanism. The lid locking latches shall unlock automatically when either the automatic actuator or the operating handle is activated, The lid retaining mechanism shall not permit the lid to separate from the container when an internal load of 700 pounds is applied to the lid. There shall be no visible evidence of failure of the lid locks. After an internal load of 700 pounds has been applied to the lid, the hardware of the survival kit container shall operate satisfactorily as specified in 3.7.2.1 and 3.7.2.2.

3.7.5.2 Aft compartment lid. The aft compartment lid shall not separate from the aft compartment, become unlocked, nor show any evidence of damage or permanent deformation when a load of250 pounds is applied to the aft compartment lid.

3.7.6 Fiber glass container. If the basic container is made of fiber glass material, the fiber glass material of the basic container shall conform to the requirements specified in 3.4.2.1.

3.7.7 Parachute opening shock. After the survival kit container has been subjected to a simulated parachute opening shock of at least 30 G (peak) and a minimum rate of increase to 500 G per second, the hardware of the survival kit container shall operate as in 3.7.2.1 and 3.7.2.2.

3.7.8 Parachute drop. The following functions shall occur when the survival kit container is subjected to parachute drops, simulating operational use, at speeds and altitudes varying from zero knot at 2,000 feet altitude through 400 knots at 18,000 feet altitude (parachute deployment 1 second after aircraft exit).

(a) The actuator shall operate the hardware of the survival kit container.

(b) The survival kit container shall deploy on its dropline 4 seconds (plus or minus 1 second) after parachute riser deployment.

Source: https://assist.dla.mil -- Downloaded: 202640-23T08:06Z
Check the source to verify that this is the currenversion before use.

3.7.9 Windblast. When the survival kit container is subjected to windblast of 600 knots at sea level or equivalent, the lid shall not seprate from the survival kit container, and the operating handle shall remain on the survival kit container. After the survival kit container has been subjected to windblast of 600 knots at sea level or equivalent, the hardware of the survival kit container shall operate satisfactorily as specified in 3.7.2.1 and 3.7.2.2.

3.7.10 Magnetic interference. The survival kit container shall not deflect a pilot's standby compass (MS17983 or equivalent) more than 3 degrees when the survival kit container is placed 6 inches from the face of the compass.

3.7.11 Adjuster

3.7.11.1 Adjuster creep. The webbing shall not slip through the adjuster more than 1/2 inch when alternating loads of 20 pounds and C pound are applied for 30 cycles in each of the following three directions: normal and 30 degrees to each side of the survival kit container hardware.

3.7.11.2 Release of adjuster. With an initial load of 20 pounds of tension applied to the attachment webbing, the adjuster shall allow complete slippage of the webbing when a 30-pound load is applied to the slider assembly.

3.7.12 Static load

3.7.12.1 Parachute attaching hardware

3.7.12.1.1 Hardware and container section. The parachute attaching hardware and the container section to which it is attached shall withstand load conditions of 1,400 pounds (proof) and 2,100 pounds (ultimate) for each side without structural failure.

3.7.12.1.2 Handle operation. With a load of 100 pounds applied to the parachute attaching hardware and to each side of the survival kit container hardware, a pull of less than 40 pounds applied 2 inches from the forward end of the handle and moved through the arc of the handle travel shall result in operation of the handle and release of the survival kit container hardware under emergency ground egress and parachute descent operating conditions,

3.7.12.2 Container (seating section). The seating section of the basic container shall not show any tainer structural failure or permanent deformation after the survival kit container has been subjected to a compression load of 4,500 pounds proof. The ultimate strength of the seating section of the basic container shall be 5,600 pounds.

3.7.12.3 Handle side load. When the operating handle is installed in the normal locked position and an outward proof load of 500 pounds is applied to the operating handle, the operating handle shall not be permanently deformed nor damaged.

Source: https://assist.dla.mil -- Downloaded: 202610-23T08:06Z
Check the source to verify that this is the current version before use.

3.7.12.4 Handle lock load. When a proof load of 200-pound tension is applied to the grip of the operating handle, the operating handle and the lock shall not be permanently deformed nor damaged.

3.7.12.5 Dropline connecting plunger device. The dropline connecting plunger device shall be fully retracted by the weight of the survival kit container when the survival kit container is placed flat against the bottom of the ejection seat pan and weighted at the center of the survival kit container to achieve a total weight of 30 pounds. The plunger, when extended, shall withstand a force of 200 pounds in any horizontal direction without damage. The plunger, when free, shall extend 1-1/2 inches (plus or minus 1/8 inch) from the bottom of the survival kit container. The changing of modes shall occur while the plunger is extended in the range of l-1/8 inches (plus or minus 1/8 inch) from the bottom of the survival kit container.

3,7.12.6 Aft compartment. The unsupported bottom of the aft compartment of the survival kit container including the compressible spacer shall withstand a static vertical distributed (5-inch by 15-inch area) load of 270 pounds proof, 400 pounds ultimate, for a minimum period of 2 seconds.

3.7.13 Reliability. The survival kit container includes a redundancy feature of an automatic operating mode and of a manual operating mode. The reliability of the automatic actuator shall be in accordance with MIL-C-25918.

3.7.13.1 Manual operating mode. The operating hardware of the survival kit container in the manual operating mode shall have a mean cycles between failures (MCBF) of 100 cycles with a minimum reliability of 0.99 at a 90 percent confidence level. The following functions shall occur during the manual operating mode :

(a) The dropline connecting plunger device shall be released from its depressed position; it shall extend and connect the dropline to the harness attachment strap assembly.

(b) The sensing cable shall fully extend and then be operated and separated from the automatic actuator by a force not to exceed 50 pounds applied in any random direction simulating riser deployment.

(c) The automatic actuator shall not be operated.

(d) The handle shall be unlocked by a force of 20 pounds (plus or minus 5 pounds), operated by a force not to exceed 50 pounds (applied 2 inches from the front), and then shall separate.

(e) Simultaneously with handle separation, both lid locks shall disengage, and both harness attachment strap side releases shall separate. The CRU-130/P survival kit container-to-man disconnect of the oxygen system shall release with or before the side attachment straps and shall not restrict the handle mechanism from completing a full stroke.

Source: https://assist.dla.mil -- Downloaded: 202610-23T08:06Z
Check the source to verify that this is the current version before use.

3.7.13.1.1 Longevity. The survival kit container shall have a service operating life span of not less than 300 cycles in the manual operating mode before wearout failures occur or the equipment consistently fails to meet the specified MCBF index.

3.7.13.2 Automatic operating mode. The automatic operating mode of the hardware of the survival kit container shall have a demonstrated reliability of 0.97 at a 90 percent confidence level. The following functions shall occur during the automatic operating mode.

(a) The dropline connecting plunger device shall be released from its depressed position and shall extend and connect the dropline to the harness attachment strap assembly.

(b) The sensing cable shall fully extend and then be operated and separated from the automatic actuator by a force not to exceed 50 pounds, applied in any random direction, simulating riser deployment.

(c) The automatic actuator shall fire the cartridge.

(d) Both lid locks shall disengage and both harness attachment strap side releases shall separate within 4 seconds (plus or minus 1 second) after sensing cable operation. The CNU-130/P survival kit container-to-man disconnect of the oxygen system shall release and shall not restrict the other operating mechanisms from completing a full stroke,

3.8 Part numbering interchangable parts. All parts having the same manufacturer’s part number shall be functionally and dimensional interchangeable. The item identification and part number requirements of MIL-STD-100 shall govern the manufacturer's part number and changes thereto.

3.9 Weight. The weight of the survival kit container, including all of the components listed on figure 1, shall not exceed 23 pounds.

3.10 Color. The color of the basic container shall be sage green conforming to 34092 of FED-STD-595. If the basic container is made of molded fiber glass, the glass fibers shall not be considered a part of the color.

3.11 Identification of product. Equipment, assemblies and parts shall be marked for identification in accordance with MIL-STD-130.

3.12 Workmanship. The survival kit container shall be made in accordance with the best shop practices for this type of equipment. The survival kit container shall be free of defects such as burrs, sharp edges, rough grinding marks, and uneven surfaces due to forming operations. Particular attention shall be paid to accuracy of dimensions; radii of fillets; marking of parts and assemblies thoroughness of welding, brazing, painting, riveting, swaging, soldering, and

Source: https://assist.dla.mil -- Downloaded: 202610-23T08:06Z
Check the source to verify that this is the current version before use.

potting; alignment of parts; and tightness of assembly screws and bolts. Fiber glass reinforced plastic materials shall be free of excessive resin buildup, inconsistency of glass fibers, wrinkles, blisters, cracks, starved areas, air bubbles, tachiness, gaps, foreign objects, and laps. All interior and exterior " surfaces of the survival kit container shall be smooth, consistent with other requirements of this specification to avoid sharp protrusions which might tear, out, or puncture the contents of the survival kit container during and after its first operation. welding, riveting, or any other permanent methods of assembly may be used provided that disassembly or reassembly of the component for inspection or overhaul purposes may be accomplished rapidly, safely, and without damage to the assembly. Operation after assembly shall not be dependent upon selective fit of any or all component parts.

3.12.1 Riveting. Riveting operations shall be carefully performed to ensure that the rivets are tight and satisfactorily headed.

3.12.2 Cleaning. The survival kit container shall be thoroughly cleaned. Any oil and foreign material that might adversely affect the operation or survival equipment with which it comes in contact shall be removed during and after final assembly.

3.12.3. Protction. The survival kit container shall be protected against the entry of all foreign materials.

3.12.4 Lubrication. Permanent-type dry lubrication that will last the expected life of the survival kit container and that meets with procuring activity approval shall be used.

3.12.5 Castings. Castings shall be high quality; clean; sound; and free of holes, porosity, cracks, and any other defects.

3.12.6 Welding. Welding shall be carefully performed to ensure that all welded joints have proper penetration, proper bead, and proper strength.

3.12.7 Alignment. The alignment of fitting and mating surfaces shall be accurate to a degree that will permit the proper functioning of the survival kit container within the environmental conditions expected during the service life of the survival kit container.

3.12.8 Assembly screws and bolts. Assembly screws and bolts Shall be tight. the word tight shall mean that the screw or bolt cannot be appreciably tightened further without dalmage or injury to the screw, bolt, nut, or components that are being secured by the screw or bolt.

3.12.9 Soldering and brazing. Soldering and brazing shall be done in accordance with applicable specifications and shall be carefully performed to ensure that all joints have proper penetration, proper head, and proper strength

Source: https://assist.dla.mil -- Downloaded: 202610-23T08:06Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government, The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

(a) First article tests

(b) Quality conformance tests.

4.3 Test conditions

4.3.1 Atmospheric conditions. Unless otherwise specified, all tests required by this specification shall be made at an atmospheric pressure of 28 to 32 inches of mercury, at a temperature of 77 (plus or minus 18) degrees Fahrenheit, and at a relative humidity of 80 percent or less. Where tests are made with atmospheric pressure or temperature substantially different from these values, proper allow ante shall be made for the change in instrument reading.

4.3.2 Test attitude. Unless otherwise specified, the survival kit container shall be tested in the normal operating attitude.

4.4 First article tests. The first article tests shall consist of all of the tests described under 4.6 and shall be conducted in accordance with the approved first article test program (see 6.2).

4.4.1 Sequence of tests. Before any other first article tests are performed, the three automatic actuators shall be tested to demonstrate compliance with MIL-C-25918. The first article tests specified in 4.4 shall be conducted in the following sequence:

(a) Examination of product

(b) Environmental tests

(c) Other tests.

Source: https://assist.dla.mil -- Downloaded: 202610-23T08:06Z
Check the source to verify that this is the current version before use.

4.4.2 First article sample and report. The contractor shall subject ten survival kit containers to the irst article tests specified in 4.4 and shall test three automatic actuators as specified in 4.4.1. Two survival kit container shall be used for all the first article tests except for the reliability tests described under 4.6.14 and the parachute drop test described in 4.6.9. Five survival kit container's shall be subjected to the reliability testing. Two first article samples, tested or untested, and a first article report prepared in accordance with MIL-STD-831 shall be furnished to the procuring activity {see 6.2].

4.4.3 Sled tests. If approved by the procuring activity, sled tests in accordance with MIL-STD-846 may be perfomed in lieu of the static tests described herein. If the option to use sled tests is requested, the request shall outline the reasons for the request.

4.4.4 Reliability testing. Four first article samples shall be subjected to the reliability tests described in 4.6.14.1. One first article sample shall be subjected to the reliability tests described in 4.6.14.2. Failure bf the survival kit containers to perform any function during the reliability testing shall constitute one failure. If failures occur during reliability testing, acceptance shall be judged as specified in table II. After one failure, direction to either continue or repeat the test may be given at the option of the procuring activity.

TABLE II Reliability Accept-Reect Criteria

Minimum Test Cycles for Acceptance	Allowable Failures
240	0
390	1
530	2
670	3

4.4.4.1 Longevity testing. Two of the first article samples that have been subjected to the reliability tests described in 4.6.14,1 shall be continued through the longevity test described in 4.6.14.1.2. Acceptance for the longevity test shall be judged on the basis of 4.4.4.

4.5 Quality conformance tests. Quality conformance tests shall consist of the following:

(a) Individual tests

(b) Sampling tests.

Source: https://assist.dla.mil -- Downloaded: 202610-23T08:06Z
Check the source to verify that this is the current version before use.

4.5.1 Individual tests. Each survival kit container shall be subjected to the following tests as described under 4.6:

(a) Examination of product

(b) Hardware operation.

4.5.2 Sample tests

4.5.2.1 Lot. A lot for plans A and B shall consist of 100 survival kit containers, or fraction thereof, manufactured under essentially the same conditions and submitted for inspection at substantially the same time. A lot for plan C shall consist of 100 fiber glass basic containers before any assembly of hardware, or fraction thereof, manufactured under essentially the same conditions and submitted for inspection at substantially the same time, A lot for plan D shall consist of 100 survival kits, or fraction thereof, in shipping containers fully prepared for delivery except for the closure of the shipping containers.

4.5.2.2 Plan A. Four survival kit containers shall be selected at random from each lot and subjected to the following tests as described under 4.6:

(a) Interchangeability of critical parts

(B) Proof loads (see 4.6.5).

4.5.2.2.1 Reconditioning. After completion of the sampling tests specified for plan A, the survival kit containers shall be reconditioned, as required, for delivery as serviceable survival kit containers.

4.5.2.3 Plan B. One survival kit container shall be selected at random from each lot (up to a maximum of four survival kit containers per contract or purchase order) and subjected to the lid retention tests described under 4.6.6.

4.5.2.4 Plan C. If the basic container is made of fiber glass material, one basic container before the assembly of any hardware shall be selected at random from each lot (up to a maximum of four basic containers per contract or purchase order) and subjected to the fiber glass container test described in 4.6.7.

4.5.2.5 Plan D. Four shipping containers fully prepared for delivery except for closure shrill be selected at random from each lot and subjected to the examination of preparation for delivery described in 4.6.15.

4.5.2.6 Rejection and retest. If one or more items from a lot fail to meet the specification, acceptance of all items in the lot shall be withheld until the extent and cause of failure have been determined. The contractor shall explain fully to the Government representative and notify the procuring activity

Source: https://assist.dla.mil -- Downloaded: 202610-23T08:06Z
Check the source to verify that this is the current version before use.

in writing the cause of failure, the action taken to preclude recurrence, and the impact this failure may have in scheduled deliveries. After correction, all of the sampling tests shall be repeated.

4.5.2.7 Individual tests may continue. For production reasons, individual tests or other sampling plans may be continued pending the investigation of a sampling test failure. Final acceptance of the entire lot or lots produced later shall not be made until it is determined that all items meet all the requirements of the specification.

4.5.3 Defects in items already accepted. The investigation of a test failure could indicate that defects may exist in items already accepted. If so, the contractor shall fully advise the procuring activity of all defects likely to be found and the method of correcting them.

4.6 Test methods

4.6.1 Examination of product. The survival kit container shall be examined visually to determine compliance with the requirements of this specification with respect to materials, finish, weight, identification marking, and workmanship.

4.6.2 Environmental tests

4.6.2.1 High temperature operation. The survival kit container shall be subjected to a high temperature test in accordance with method 501, procedure I of MIL-STD-810. While the survival kit container is at the high temperature, the hardware of the survival kit container shall be subjected to and pass one test each in accordance with 4.6.3.1 and 4.6.3.2.

4.6.2.2 Temperature shock. The survival kit container shall be subjected to a temperature shock test in accordance with method 503 of MIL-STD-810. At the end of the specified period, the survival kit container shall be returned to room temperature, operated as specified in 4.6.3.1 and 4.6.3.2 for one test, and inspected for signs of deterioration and damage.

4.6.2.3 Low temperature operation. The survival kit container shall be subjected to a low temperature test at minus 65 degrees Fahrenheit in accordance with method 502 of MIL-STD-810. While the survival kit container is at the low temperature, the hardware of the survival kit container shall be subjected to and pass one test each in accordance with 4.6.3.1 and 4.6.3.2.

4.6.2.4 Dust. The complete survival kit container with carbon dioxide cylinder, life raft, and simulated survival equipment shall be subjected to a dust test in accordance with method 510 of MIL-STD-810. At the end of the first 6-hour test period, step 1, the orientation of the survival kit container shall be changed to another vulnerable position relative to the dust stream. After the dust test,

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

the survival kit container shall be subjected to and pass the tests specified in 4.6.3.1 and 4.6.3.2 for ten alternate operations.

4.6.2.5 Humidity. The survival kit container shall be-subjected to a humidity test in accordance with method 507, procedure I of MIL-STD-810 for not less than 120 hours and then shall be subjected to and pass one test each in accordance with 4.6.3.1 and 4.6.3.2.

4.6.2.6 Salt atmosphere. The survival kit container shall be subjected to a salt fog test in accordance with method 509 of MIL-STD-810. After the salt fog test, the survival kit container shall be subjected to and pass the test specified in 4.6.3.1 and 4.6.3.2 for ten alternate operations.

4.6.2.7 Vibration. The complete-survival kit container shall be mounted on a vibration stand for 6 hours on each of the three axis, two horizontal and one vertical, operating at a frequency ranging from S to 500 Hertz with a double amplitude not to exceed 0.036 inch and a vibratory acceleration not to exceed plus or minus 10G. After the vibration test, the survival kit container shall be subjected to and pass one test each as specified in 4.6.3.1 and 4.6.3.2. The survival kit container shall be strapped tightly to the vibration table with 1-3/4-inch-wide cotton or polyester-cotton webbing.

4.5.2.8 Shock. The survival kit container shall be subjected to the shock test specified in method 516, figure 516.1-1, procedures 1 and III, amplification a and duration c of MIL-STD-810. After the specified testing the survival kit container shall be subjected to and pass one test each as specified in 4.6.3.1 and 4.6.3.2.

4.6.3 Hardware operation. The operation of the hardware of the survival kit container under the following simulated conditions shall be tested. Failure of the hardware to accomplish any specified f-unction shall be cause for rejection of the survival kit container.

4.6.3.1 Prachute descent. The override selector lever shall be placed in the down position. The actuator device shall be operated simulating parachute deployment. The sensing cable assembly shall operate and separate from tje survival kit container by a force not to exceed 50 pounds (applied at the canopy riser fitting in random directions to simulate deployment). The automatic actuator shall Roy be initiated. The dropline connecting plunger device shall he extended simulating seat separation. The operating handle of the time survival hit container shall unlock with 20 pounds (plus or minus 5 pounds). separation of the container hardware, attachment of the dropline, and opening of the lid lock shall then occur when a miaximum pull of 15 pounds, except when subjected to the tests described under applied under 4.6.2, is applied to the operating handle. The maximum pull for the tests. described under 4.6.2. shall be 50 pounds. The operating handle shall separate completely from the survival lidcontainer when maximum

Source: https://assist.dla.mil -- Downloaded: 202610-23T08:06Z
Check the source to verify that this is the current version before use.

force is applied. A SO-pound internal upward force shall be applied to the center of the survival kit container lid. A 25-pound force at 120 degrees to the top of the main compartment shall be applied at both sides of the survival kit container at the attaching hardware. This test shall be repeated for a total of five tests. The CNU-130/P survival kit container-to-man disconnect of the oxygen system shall release slightly before the side attachment straps and shall not restrict the handle mechanism from completing a full stroke.

4.6.3.2 Emergency ground egress. The dropline connecting plunger device shall be depressed to simulate installation in an ejection seat. The operating handle of the survival kit container shall unlock with a pull of 20 pounds (plus or minus 5 pounds). Separation of the container shall then occur when a maximum force of 15 pounds, except during and after the tests described under 4.6.2, is applied to the operating handle. During and after the tests described under 4,6.2, the maximum force shall be 30 pounds. The operating handle shall separate completely from the survival kit container when this force is applied. The dropline shall be locked to the portion of the hardware remaining with the survival kit container. This test shall be repeated for-a total of ten operations. A 15-pound load applied in accordance with 4.6.13.1.2 shall be used on each parachute attachment, and a SO-pound internal upward force shall be applied to the center of the survival kit container lid. The ONU-130/P survival kit container-to-man disconnect of the oxygen system shall release slightly before the side attachment straps and shall not restrict the handle mechanism from completing a full stroke.

4.6.3.3 Automatic operation The override selector lever shall be moved to the up position. A 50-pound upward internal force shall be applied to the center of the lid. An upward 25-pound force, directed 30 degrees aft of normal to the top of the lid, shall be applied to each of the survival kit container attachment snaps. The dropline connecting plunger device shall be extended, simulating seat separation. The parachute deployment sensing cable assembly shall be operated in a random direction simulating parachute deployment. The cable assembly shall operate and separate from the automatic actuator by a force not to exceed SO pounds applied at the canopy riser fitting. The automatic actuator shall fire the cartridge and the survival kit container hardware shall be operated 4 seconds (plus or minus 1 second) later. The operating mechanism shall be detented in the operated position. The cartridge may be simulated for the quality conformance tests only.

4.6.4 Interchangeability of critical parts. Functional interchangeability of the lids, the cushions, the operating handles, and survival kit container attaching hardware shall be determined by interchanging each item on four containers and actuating for one test each in accordance with 4.6.3.l and 4.6.3.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

4.6.5 Proof loads. The proof loads of 4.6.13.1.1, 4.6.13.2, 4.6.13.4, and 4,6.13.6 shall be applied to the survival kit container. The survival kit container shall then be subjected to and pass one test each as specified in 4.6.3.1 and 4.6.3.2 and shall be visually inspected. There shall not be any damage or permanent deformation to the survival kit container.

4.6.6 Lid retention

4.6.6.1 Lid locking machanism. The lid shall be subjected to an upward load of 700 pounds normal to the lid at the center. The load shall be applied to a cable or webbing threaded through a hole or slot in the lid and attached to a 6-inch-diameter metal plate that bears against the underside of the lid. The test shall be repeated with the load applied 3 inches to the right of the center point and then 3 inches to the left of the center point. There shall not be any evidence of failure of the lid locks or damage or permanent deformation. The survival kit container shall then be subjected to and shall pass one test each as specified in 4.6.3.1 and 4.6.3.2.

4.6.6.2 Aft compartment lid. A load of 250 pounds shall be applied to an upward direction normal to the aft compartment lid and 1 inch forward of the lock. The load shall be applied to an eyebolt fastened to the aft compartment lid with a washer to bear on the undersurface of the aft compartment lid, The aft compartment lid shall not separate from the aft compartment, become unlocked, or show any evidence of damage or permanent deformation.

4.6.7 Fiber glass container. Four coupons of the fiber glass material shall be taken randomly from the basic container and tested in accordance with the applicable methods of FED-STD-406 to determine compliance with the requirements specified in 3.4,2.1.

4.6.8 Parachute opening shock. The survival kit container shall be subjected to simulated parachute opening shock by means of a drop test. The drop test shall consist of dropping the loaded survival kit container to the end of a suspension assembly of such height and elasticity as to give the required shock. The survival kit container shall be loaded with ballast, simulating survival equipment, to achieve a total weight of 50 pounds. The loaded survival kit container shall be secured at the parachute attaching hardware cm both sides to a webbing assembly (simulating the parachute harness} which, in turn, is attached to a drop cable. The length and elasticity of the drop system shall be such as to achieve a force of at least 30 G (peak) and a minimum rate of increase of 500 G per second between the webbing assembly and the drop cable. Following this test, the survival kit container shall be operated to determine compliance with 4.6.3.1 and 4.6.3.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

4.6.9 Parachute drop, Twent y parachute drop tests shall be conducted at various speeds using articulated dummies and BA-22 back style personnel Parachutes modified with actuator sensing systems and with the survival kit containers packed to simulate operational use. 'The speeds and altitudes of the drops shall vary from zero knots at 2,000 feet altitude through 400 knots at 18,000 feet altitude [parachute deployment 1 second after aircraft exit). The override selector lever shall be in the upward position for automatic operation of the survival kit container. The actuator shall operate the survival kit container hardware and the survival kit container shall deploy on its dropline 4 seconds [plus or minus 1 second) after parachute riser deployment. During the tests there shall not be any damage to or decreased performance of the parachute or survival kit container or damage to the dummy which can be attributed to the actuator. Failure to meet the preceding conditions as specified shall be cause for rejection.

4.6.10 Windblast. The survival kit container shall be placed in a simulated ejection seat bucket and shall be attached to a personnel parachute harness being worn by a 95th percentile anthropomorphic dummy. The survival kit container shall be subjected to a windblast of 600 knots at sea level or equivalent. The wind tunnel shall be equipped with a deflector and shutoff so that the rate of onset of the windblast is not more than 0.12 second. Shutoff of the windblast shall start immediately after the deflector is in an open position, Decay shall occur in not less than 1 second. The lid shall not separate from the survival kit container, The operating handle shall remain on the survival kit container. There shall not be any visible deformation to the survival kit container. Upon completion of the windblast test, the survival kit container shall be subjected to and pass one test each as specified in 4.6.3.1 and 4.6.3.2.

4.6.10.1 Ejection seat survival kit container separation. windblast tests may be conducted in conjunction with ejection seat survival kit container separation tests at the maximum speed specified in MIL-STD-846. The survival kit container, its parachute attaching hardware, and components shall withstand this windblast without any damage or structural failure.

4.6.11 Magnetic interference. The survival kit container shall be placed 6 inches from the face of a pilot's standby compass conforming to MS17983 or equivalent . The survival kit container shrill not deflect the compass more than 3 degrees.

4.6.12 Adjuster

4.6.12.1 Adjuster creep. A cycle consisting of alternating loads of 20 pounds and zero pound shall be applied for 30 cycles in each of three directions: normal and 30 degrees to each side of the survival kit container hardware. The test shall be started by pulling the webbing through the adjuster to eliminate any set in the webbing or false load of the spring-loaded slider. The 20-pound load and the zero-pound load shall be at a stroke of at least 3/4 inch. At the end of the 90 cycles, the webbing shall not have slipped more than 1/2 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

4.6.12.2 Release of adjuster. An initial load of 20 pounds of tension shall be applied in the attachment webbing. A load of 30 pounds shall be applied to the slider assembly. When the 30-pound load is applied to the slider assembly, the adjuster shall allow complete slippage of the webbing.

4.6.13 Static loads

4.6.13.1 Parachute attaching hardware


4.6.13.1.1 Hardware and container section. The parachute attacing hardware and the survival kit container section to which it is attached shall be subjected to load conditions of 1,400 pounds (proof) and 2,100 pounds (ultimate) for each side. The proof loads shall be applied in segments of 45 degrees in a 30-degree cone about each attachment, The ultimate loads shall be applied to each attachment in the outboard segment only.

4.6.13.1.2 Handle operation. A load of 100 pounds shall be applied to the parachute attaching hardware at a 30-degree angle towards the front, then aft, and to each side of the survival kit container hardware. Load shall be applied 2 inches from the forward end of the operating handle and shall move through the arc of the handle travel. A pull of less than 40 pounds shall operate the handle and release the survival kit container hardware both under emergency ground egress anti parachute descent operating conditions,

4.6.13.2 Container (seating section) The basic container shall be placed with the top surface of the container horizontal to the compression tester so that the load will be applied vertically. A compression test form, consisting of a hard rubber block and having an outline as described on figure 2, shall be placed on the container and oriented as shown. Compression loads of 4,500 pounds proof and 5,600 pounds ultimate shall he applied to the compression test form for a period of 7 seconds. The loads shall be applied vertically and upward compressing the container between the base of the test stand and the force apparatus. The container shall not show any structural failure or permanent deformation after the 4,500-pound load is relieved. The ultimate strength of the container at the section mentioned above shall be 5,600 pounds. Distribution or warpage will be permitted after the 5,600-pound ultimate load is relieved, After this test, the body of the container, the lid, the closures, arid the hardware fitting shall function properly in accordance with 4.6.3.1 and 4.6.3.2.

4.6.13.3 Handle side load. The handle shall be installed in the normal locked position. An outward proof load of 500 pounds shall be applied to the top of the rigid portion at the front of the handle parallel to the surface of the lid for minimum period of 10 seconds. The handle shall net show any permanent deformation or damage.

Source: https://assist.dla.mil -- Downloaded: 202610-23T08:06Z
Check the source to verify that this is the current version before use.

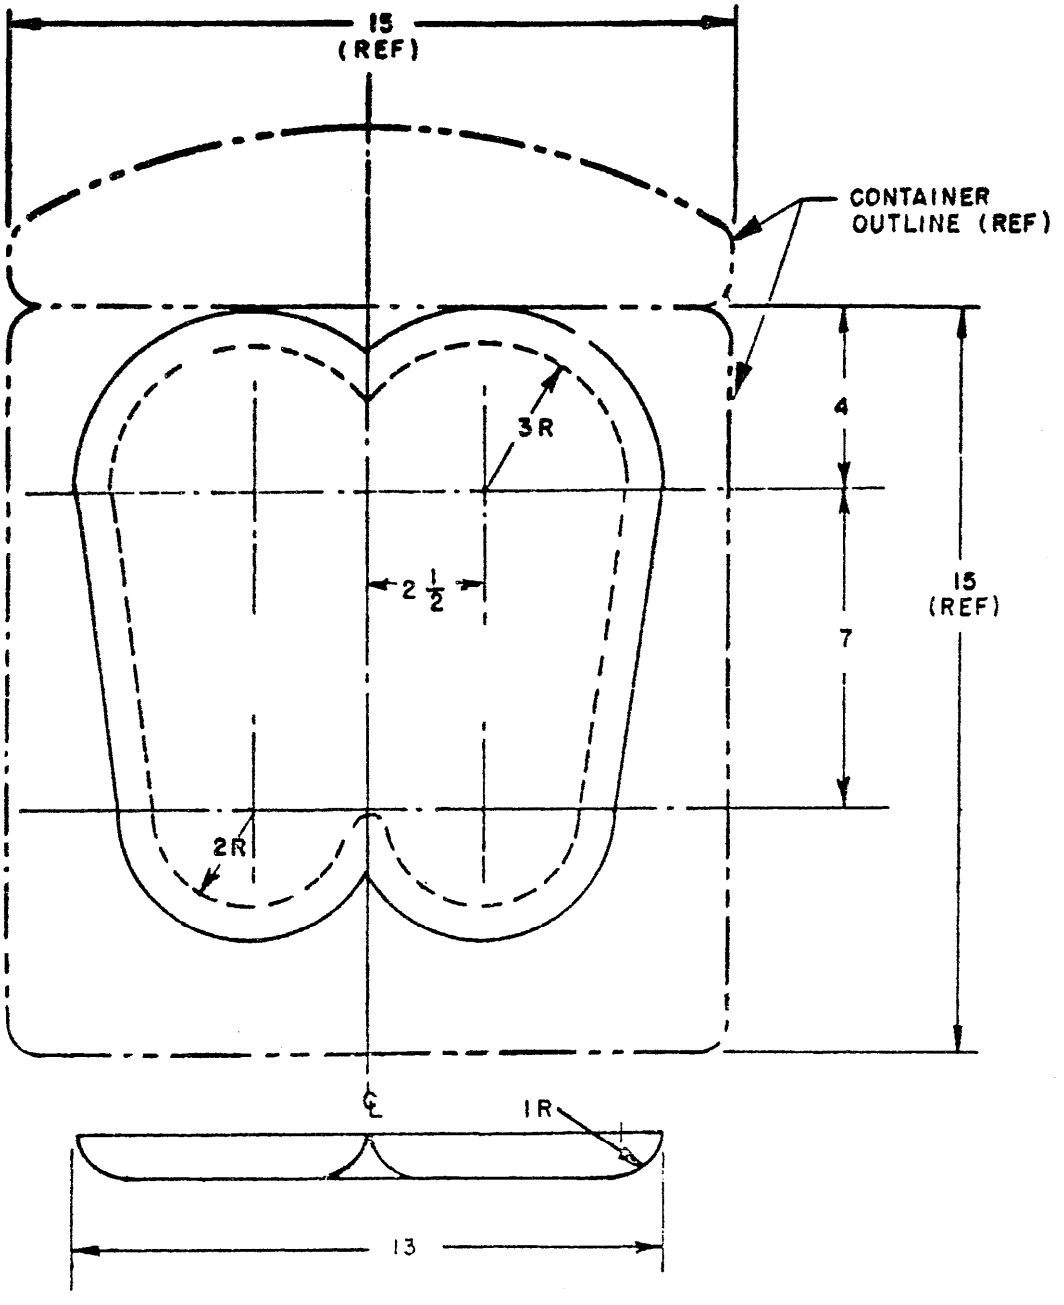

NOTE: DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
TOLERANCES ± 1/4

FIGURE 2. Compression Test Form

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

4.6.13,4 Handle lock load. A proof load of 200-pound tension shall be applied to the grip of the handle perpendicular to the surface of the lid for a minimum period of 10 seconds. The handle and lock shall not show any permanent deformation or damage.

4.6,13.5 Dropline connecting plunger device. A load of 200 pounds shall be applied to the lowest point of the plunger in the extended position in both fore and aft directions and from both sides of the survival kit container. After the application of the 200-pound load in each of the specified positions, the survival kit container shrill be subjected to and pass one test each as specified in 4.6.3.1 and 4.6.3.2. The actuation of the plunger shall be determined and shall be as specified in 3.7,12.5.

4.6.13.6 Aft compartment. The survival kit container skall be placed in a fixture in a manner so that the bottom of the aft compartment will be unsupported, The aft compartment of the survival kit container including the compressible spacer shall be subjected to a static vertical distributed (5-inch by 15-inch area) load of 270 pounds proof, 400 pounds ultimate for a minimum period of 2 seconds.

4.6.14 Reliability. Five survival kit containers that have been designated units 1 through shell be subjected to the reliability tests as specified herein to demonstrate the reliability specified in 3.7.15. Except for the new sensing cables specified in 4.0.14.1.1, no parts of the survival kit containers shall be replaced as preventive maintenance during the reliability tests.

4.6.14.1 Manual operating mode. The four survival kit containers that have been designated units 1 through 4 shall be subjected to tests as specified in table III. The hardware of the survival kit containers shall be cycled in accordance with the schedule specified in table III for a minimum of 240 consecutive successful cycles. The survival kit containers shall be loaded and operated as specified by 4.6.3.1. A failure shall result when one of the functions specified in 3.7.13.1 does not occur.

4.6.14.1.1 Sensing system. Ten of the sixty cycles specified in table III for the survival kit container designated unit 1 shall be conducted by dropping a 2-pound weight 25 feet while it is attached to a steel cable connected to the parachute sensing system. The sensing cables shall be extracted without breakage. The sensing system shall operate as designed without damage. A new sensing cable shall be used for each of the ten cycles.

Source: https://assist.dla.mil -- Downloaded: 202640-23T08:06Z
Check the source to verify that this is the current version before use.

TABLE III. Distribution of Reliability Test

Test Methods	Cycles Per Test				
	Unit 1	Unit 2	Unit 3	Unit 4	Unit 5
Dust (see 4.6.2.4)			1/	10	2/
Humidity (see 4.6.2.5)			1/	10	2/
Salt atmosphere (see 4.6.2.6)			1/	20	2/
Vibration (see 4.6.2.7)			1/	20	2/
Parachute descent (see 4.6.3.1)	60 3/	60	60		
Automatic operation (see 4.6.3.3)					10

1/ The unit shall be subjected to the environmental test without operational cycling before exposure to the next test.
2/ The unit shall be subjected to the environmental test and then subjected to one automatic operation as specified in 4,6.3.3. The unit shall be reconditioned after the automatic operation before it is subjected to the next test.
3/ Unit 1 shall be subjected to ten of these cycles as specified in 4,6.14.1.1.

4.6.14.1.2. Longevity. The survival kit containers that have been designated units 1 and 2 shall be continued through a longevity test after completion of the reliability tests. One of the surviva1 kit containers shun be operated as specified in 4.6.3.1 for 240 cycles. The other survival kit container shall be operated as specified in 4.6.3.2 for 240 cycles. So cable adjustment shall be made or required during the longevity test. Parts requiring replacement within this period of time and the normally operating period of such parts shall be recorded by the contractor.

4.6.14.2 Automatic operating mode. The reliability of the automatic actuator shall be in accordance with MIL-C=25918 and shall be Demonstrated during the static firing tests specified therein. In addition, the survival kit container that has been designated unit 5 shall be subjected to tests as specified in table III. The hardware of the survival kit container shall be cycled in accordance with the schedule specified in table III for 14 consecutive successful

Source: https://assist.dla.mil -- Downloaded: 202610-23T08:06Z
Check the source to verify that this is the current version before use.

cycles. The survival kit container shall be loaded and operated as required in 4.6.3.3 A failure shall result when one of the functions specified in 5.7.13.2 does not occur.

4.6.15 Examination of preparation for delivery. The shipping container fully prepared for delivery with the exception that it need not be sealed shall be examined to determine conformance to good workmanship and to the levels of preservation and packaging and of packing specified in the contract or order.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be in accordance with MIL-STD-794 and shall be level A or C as specified (see 6.2)

5.1.1 Level A. Each survival kit container shall be preserved in accordance with method III of MIL-P-116.

5.1.2 Level C. Each survival kit container shall be packaged in a manner that will adequate protection against corrosion, deterioration, and physical damage during shipment from the supply source to the first receiving activity for immediate use. Level C may conform to the supplier's commercial practice provided the latter meets the requirements for this level.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Survival kit containers preserved and packaged as specified shall be packed in accordance with level A of MIL-STD-794. The gross weight of each pack shall be limited to approxiamtely 200 pounds.

5.2.2 Level B. Survival kit containers preserved and packaged as specified shall be-in accordance with level B of MIL-STD-794. The gross weight of each pick shall be limited to approximately 500 pounds.

5.2.3 Level C. Packages that require overpacking for acceptance by the carrier shall be packed in accordance with level C of MIL-STD-794.

5.3 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with the requirements

6. NOTES

6.1 Intended use. The CNU-130/P survival kit container is intended for use with F-101B, F-102, and F-106 aircraft. The ONU-129(V)2/P survival kit container is intended for use with B-52E through B-52H aircraft and with all F-101 aircraft except the F-10IB aircraft. The ONU-129(V)1/P aircraft is intended for use with F-5 aircraft.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification

(b) Specify CNU-129(V)l/P, CNU-129(V)2/P, or CNU-130/P survival kit container [see 1.1)

(c) List of interchangeable components and assemblies

(d) First article requirements, including first article test program and first article test report (see 3.1 and 4.4 through 4.4.4.1)

{e) Selection of applicable levels of preservation and packaging and packing (see 5.1 and 5.2).

Custodian:
Air Force - 11

Reviewer:
Air Force - 71

Preparing activity:
Air Force - 11

Project No. 1660-F103

Source: https://assist.dla.mil -- Downloaded: 202610-23T08:06Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

C16061

Source: https://assist.dla.mil -- Downloaded: 202610-23T08:06Z
Check the source to verify that this is the current version before use.