MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR FRAME, TYPE IV, OFFSET FIN, 0.4 PITCH, FORMAT C AND E


This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connector frame described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-28754.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:56Z
Check the source to verify that this is the current version before use.

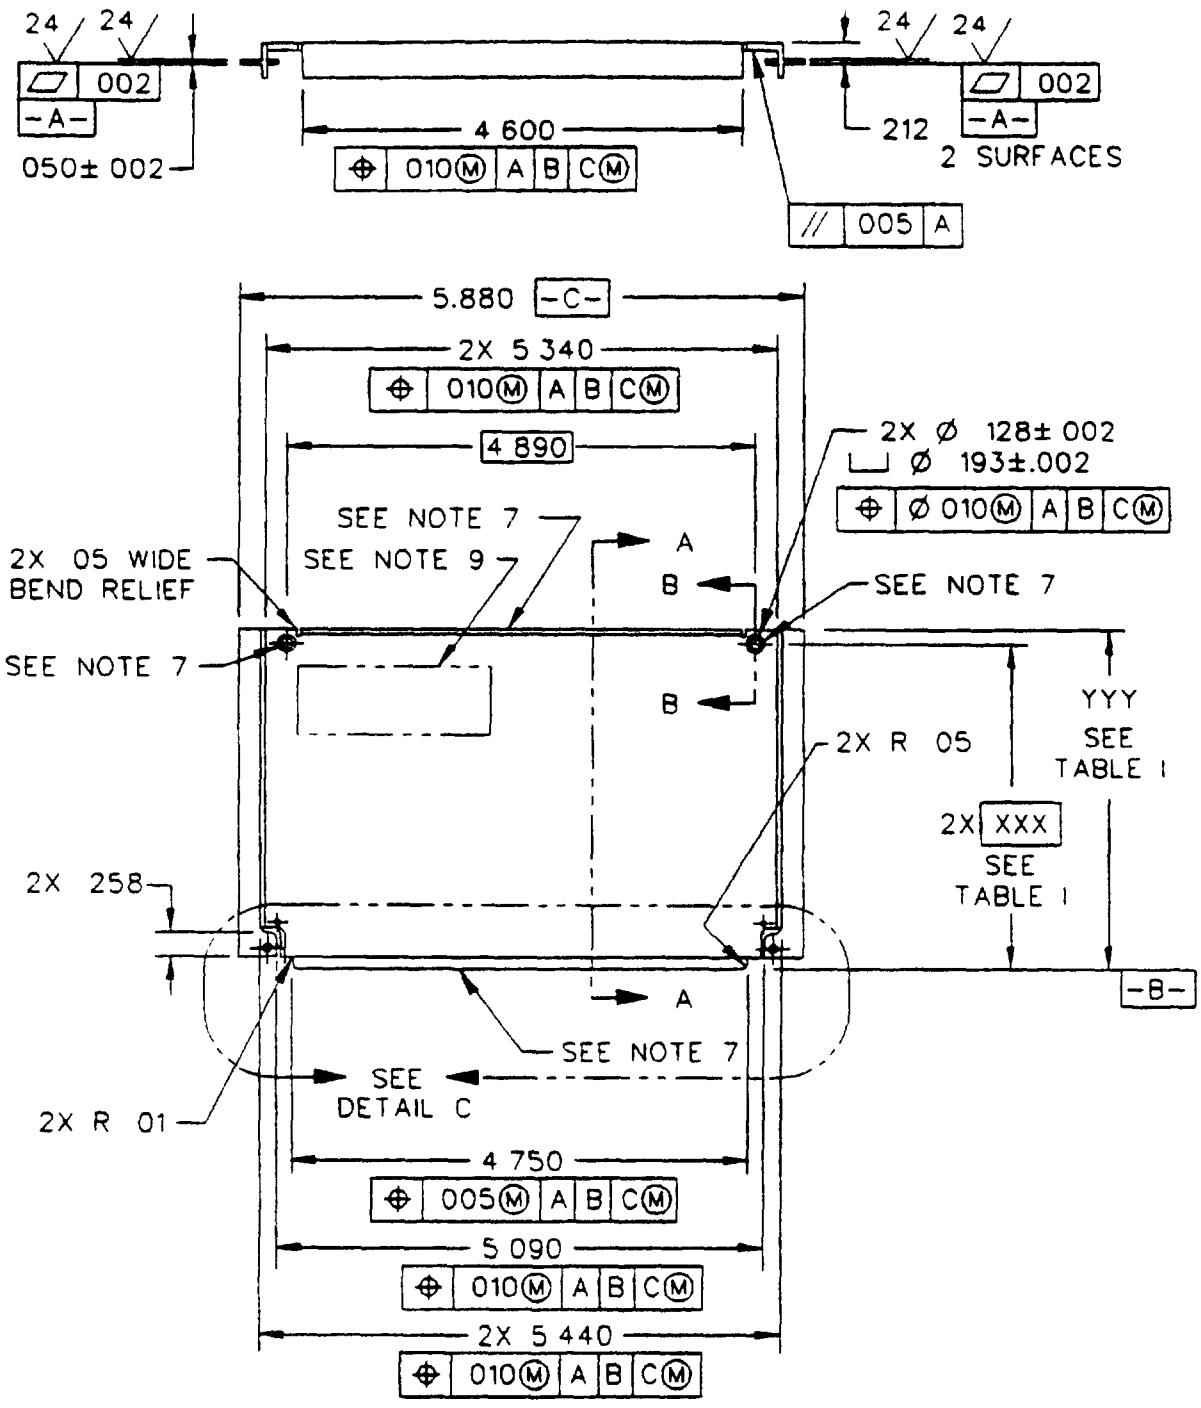

-1 AND -3

FIGURE 1. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:56Z
Check the source to verify that this is the current version before use.


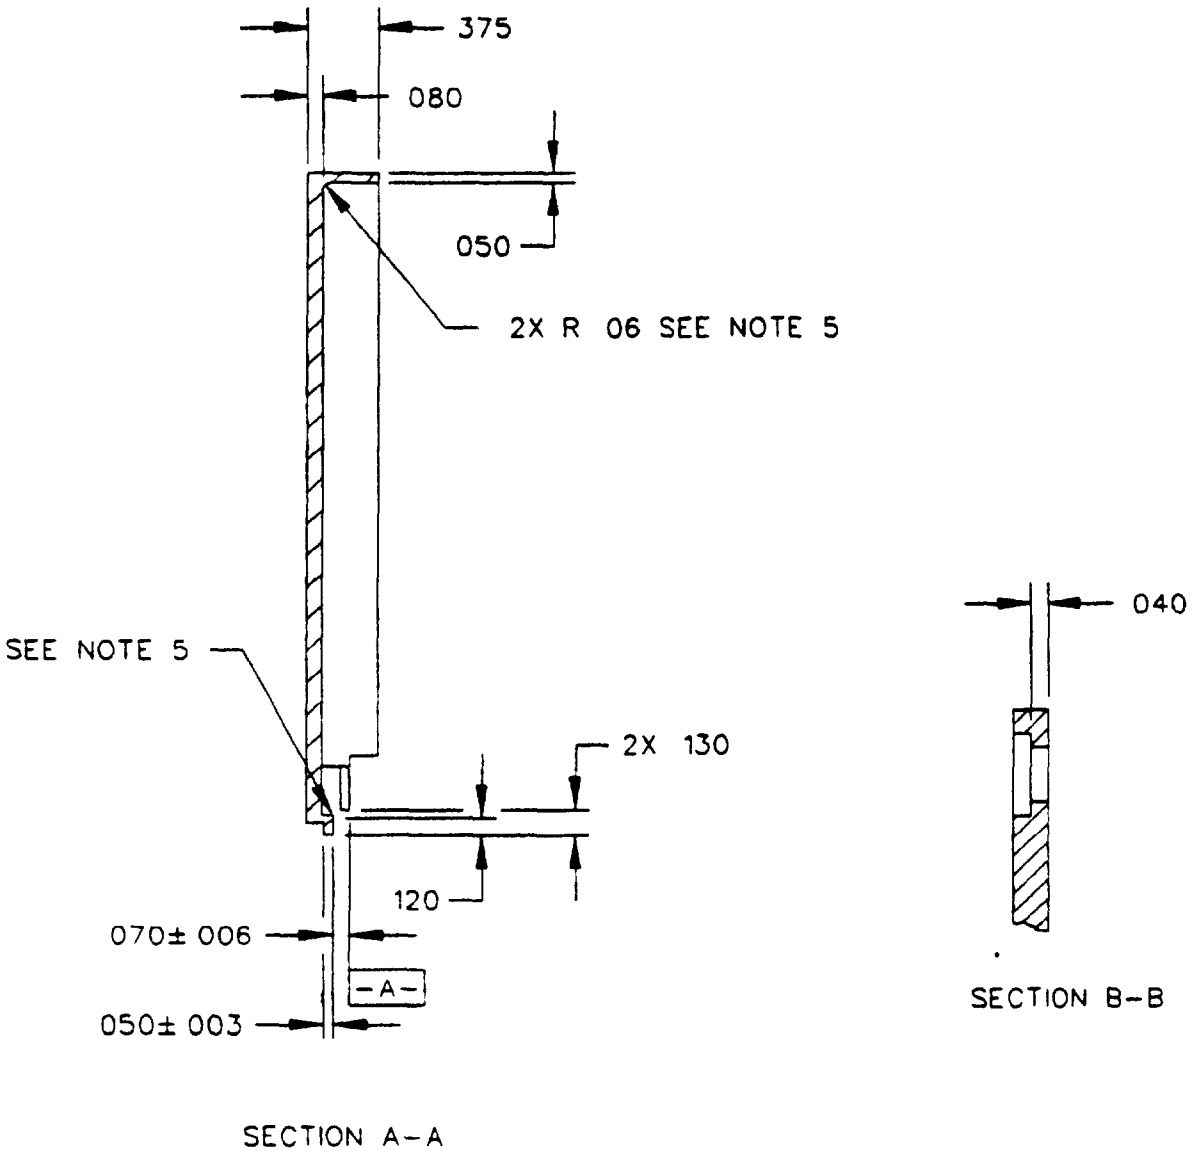


FIGURE 1. Dimensions and configurations - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:56Z
Check the source to verify that this is the current version before use.

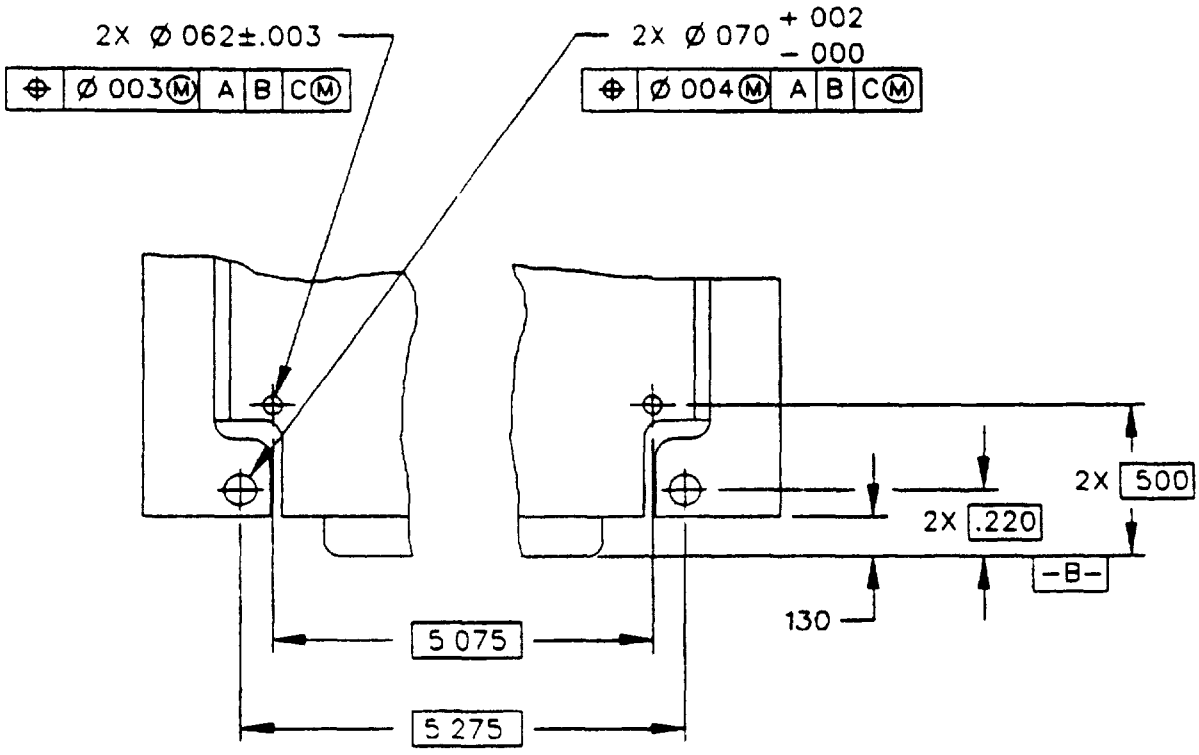

DETAIL C

FIGURE 1. Dimensions and configurations - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:56Z
Check the source to verify that this is the current version before use.

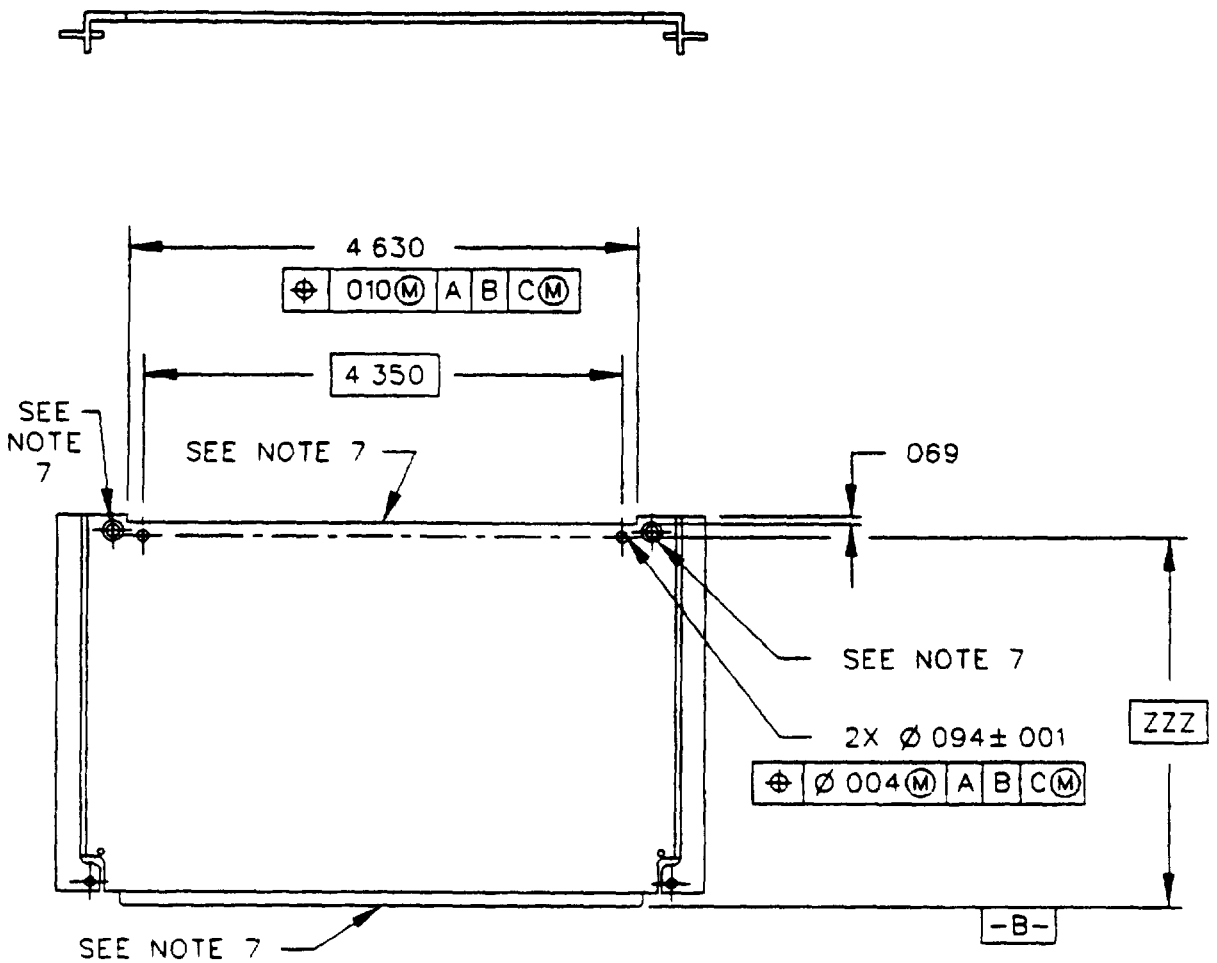


-2 AND -4
IDENTICAL TO -1 AND -3
EXCEPT AS SHOWN


FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:56Z
Check the source to verify that this is the current version before use.

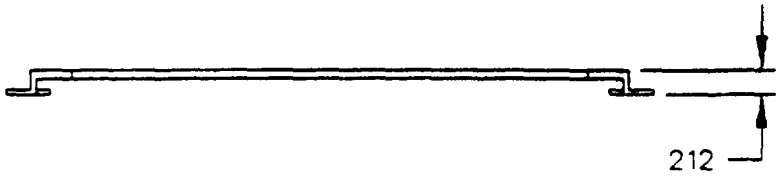

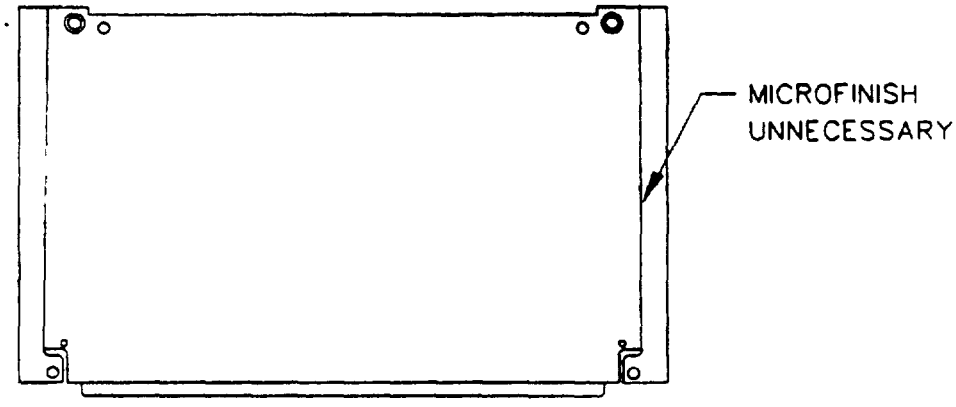

-5 IDENTICAL TO -4
EXCEPT AS SHOWN

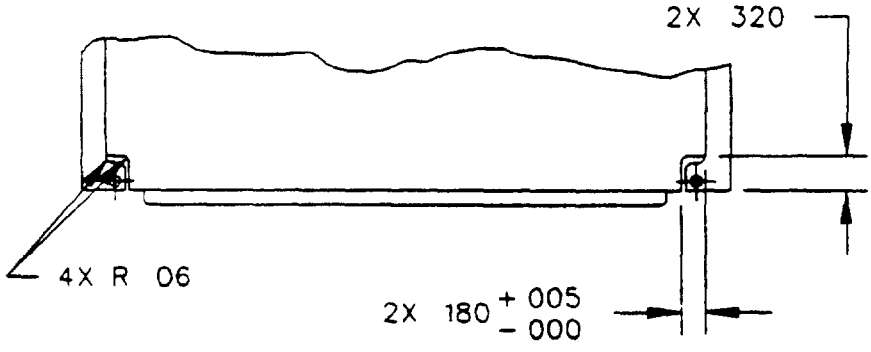

BACK VIEW
ALL DASH NUMBERS

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:56Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
0.001	0.025	0.062	1.575	0.275	6.985	5.090	129.286
0.002	0.051	0.070	1.778	1.340	34.036	5.150	130.810
0.003	0.076	0.095	2.413	1.490	37.846	5.340	135.636
0.005	0.127	0.100	2.540	4.600	116.840	5.440	138.176
0.010	0.254	0.122	3.099	4.750	120.650	5.740	145.796
0.015	0.381	0.128	3.251	4.860	123.444	5.880	149.352
0.030	0.762	0.150	3.810	4.890	124.206		
0.050	1.270	0.163	4.140	5.075	128.905		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.40 mm.
3. Unless otherwise specified, tolerances are plus or minus 0.005 inch (0.127 mm) for three place decimals, plus or minus 0.01 inch (0.25 mm) for two place decimals and plus or minus 1° for angles.
4. Unless otherwise specified, all corner radii shall be 0.05 inch (1.27 mm) radius maximum.
5. Thickness transition in bend area.
6. Surface roughness shall be in accordance with ANSI B46.1-1985.
7. These points are designated as racking points. Anodize on the base material is not required.
8. Dimensional limits apply after plating.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:56Z
Check the source to verify that this is the current version before use.

9. Mark part number, revision letter, manufacturer's code ident CAGE and date code in 0.12 plus or minus 0.02 inch (3.05 plus or minus 0.51 mm) high gothic characters at approximate location shown. Use white epoxy ink, MIL-I-43553, B43553-II, and mark in accordance with MIL-STD-130.

10. Break all sharp corners and edges, 0.005 inch maximum.

FIGURE 1. Dimensions and configurations - Continued.

REQUIREMENTS:

Dimensions and configurations: See figure 1 and table I.

Material: Aluminum Alloy 6101, ASTM B317, T6, Extrusion.

Finish: Anodic coating, MIL-A-8625, type III, class 2, black.

Military part number: M28754/96- (dash number from table I).

TABLE I. Dash numbers.

DASH NO	TOP CONFIGURATION	FORMAT	XXX	YYY	ZZZ	CROSS PIECES
-1	FOLDED	C	3.518	3.668	3.474	YES
-2	CUT					
-3	FOLDED	E	6.138	6.288	6.094	YES
-4	CUT					
-5	CUT	E	6.138	6.288	6.094	NO

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:56Z
Check the source to verify that this is the current version before use.

Qualification information: The frame shall meet the following qualification tests of MIL-C-28754, table IV, type IV: Subgroup I, Visual and Mechanical inspection; Subgroup II, Vibration, Visual and Mechanical inspection; Subgroup III, Salt Spray, Visual and Mechanical inspection; Subgroup IV, Shock, Fin/Header torque, Fin cantilever load, Rib strength, Visual and Mechanical inspection.

Number of units to be inspected: Twelve (12) units of each dash number to be qualified shall be inspected. See MIL-C-28754 Appendix for exceptions when qualifying similar parts, or contact the qualification activity.

Compatibility: This frame may be used with the connector described in MIL-C-28754/99.

Supersession data: Supersedes Naval Air Systems Command Drawing Number SK-MEL-4611-1, -2, -5, -6, Code Identification Number 30003.

Custodian:
Navy - SH

User activity:
Navy - AS

Agent:
NWSC, Crane

Preparing activity:
Navy - SH

(Project 5935-N346-07)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:56Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-28754/96(SH)	Connectors, Electrical, Modular, Connector Frame, Type IV, Offset Fin, 0.4 Pitch, Format C and E

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5. PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last First MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street City State ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:56Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 5523)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D.C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 5523)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:56Z
Check the source to verify that this is the current version before use.