MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, TYPE IV, CONNECTOR, 150 CONTACT, RIGHT ANGLE, CONTACT TAILS ON 0.100 CENTERS

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connectors described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-28754.

AMSC N/A FSC 5935
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:56Z
Check the source to verify that this is the current version before use.

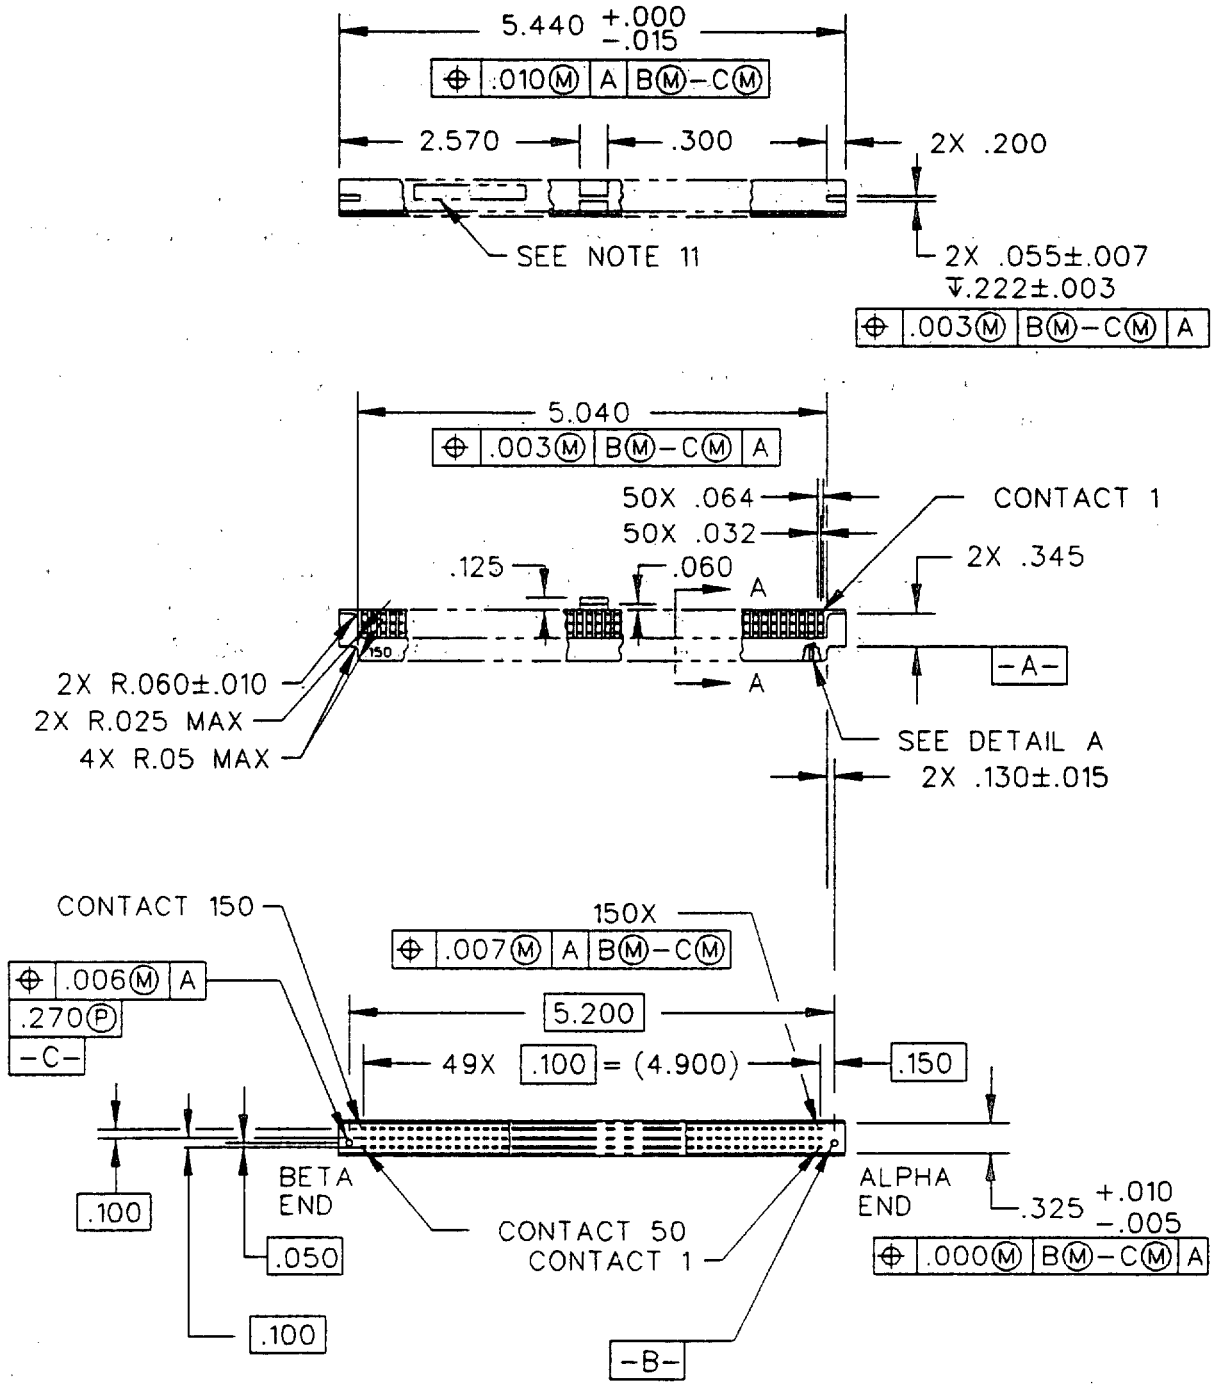


FIGURE 1. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:56Z
Check the source to verify that this is the current version before use.

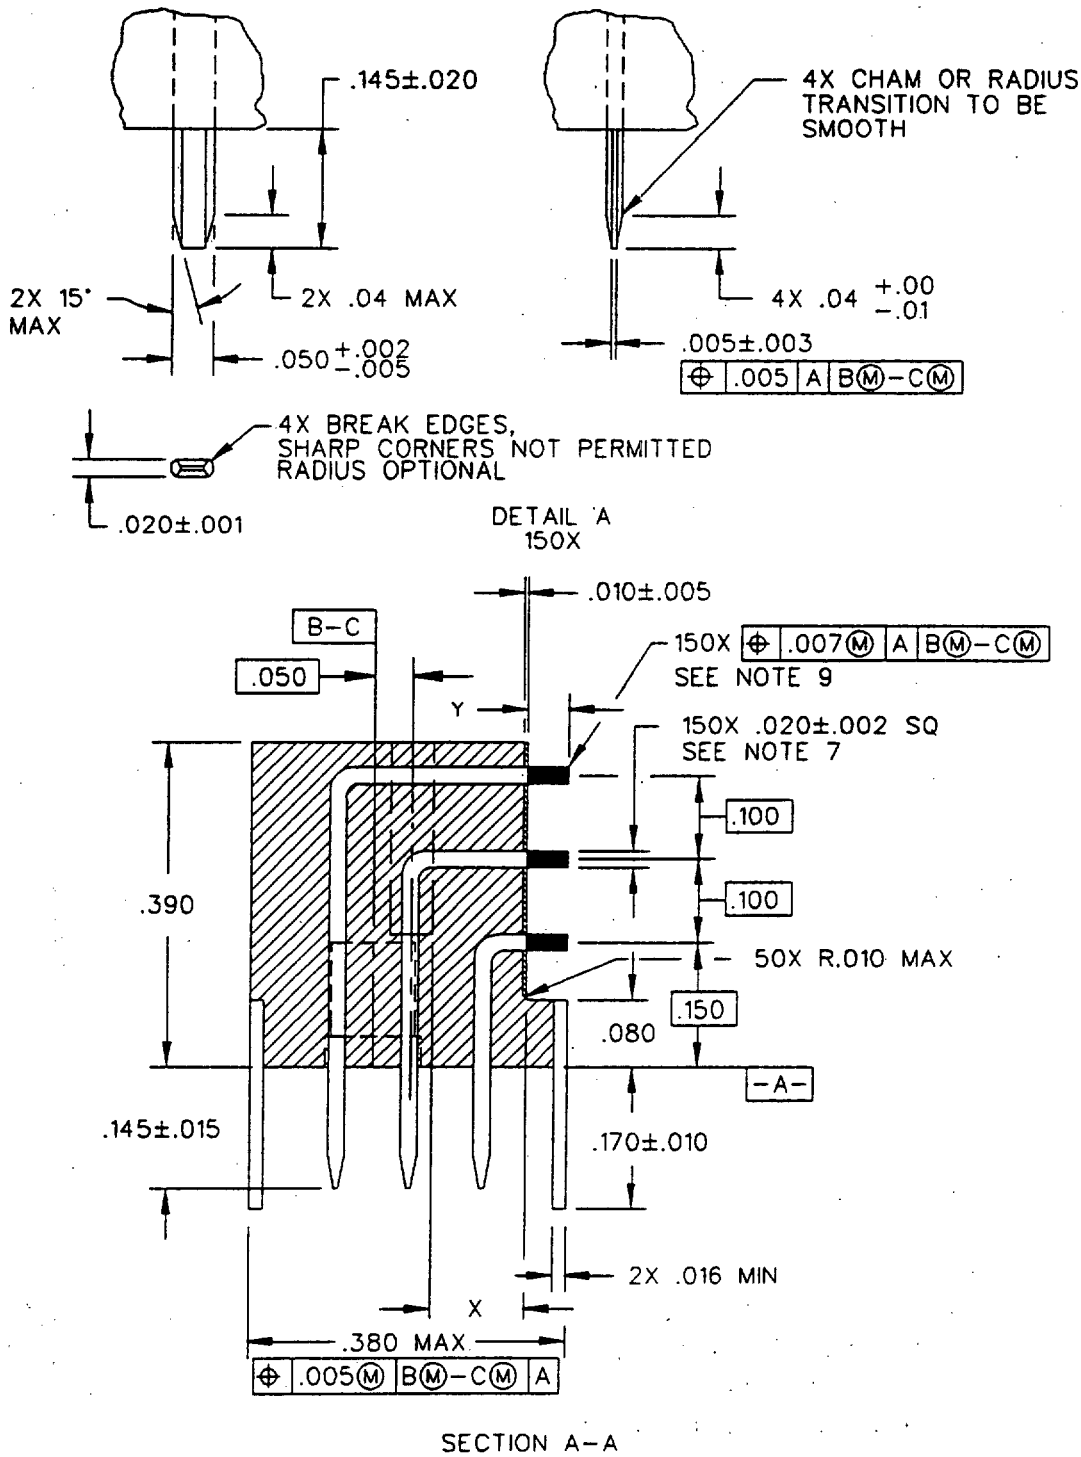


FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:56Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
0.001	0.025	0.032	0.813	0.145	3.683	5.040	128.016
0.002	0.051	0.040	1.016	0.150	3.810	5.200	132.080
0.003	0.076	0.050	1.270	0.170	4.318	5.440	138.176
0.005	0.127	0.055	1.397	0.200	5.080		
0.007	0.178	0.060	1.524	0.300	7.620		
0.010	0.254	0.064	1.626	0.325	8.255		
0.015	0.381	0.080	2.032	0.345	8.763		
0.016	0.406	0.100	2.540	0.380	9.652		
0.020	0.508	0.125	3.175	0.390	9.906		
0.025	0.635	0.130	3.302	2.570	65.278		

NOTES:

1. Dimensions are in inches.

2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.40 mm.

3. Unless otherwise specified, tolerances are plus or minus 0.005 (0.127 mm) inch for three place decimals, plus or minus 0.01 (0.35 mm) inch for two place decimals and plus or minus 1° for angles.

4. Flash around blade contacts not to exceed 0.010 (0.254 mm) inch from the surface of the insulator and shall be firmly attached.

5. Contact shield shall be marked with contact numbers 1, 50, 101 and 150 in contrasting color ink 0.06 (1.52 mm) inch high.

6. Single or multiple piece construction is optional provided that the end requirements of the drawing are met. It is permissible for the connector body to be installed in either an aluminum or thermoplastic shell which provides the contact shield and key pin hole features. The thermoplastic shall be type GLT-30F.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:56Z
Check the source to verify that this is the current version before use.

7. Dimension prior to solder coating.

8. Except for solder coating, dimensional limits apply to contact dimensions after plating other than those covered by note 7.

9. On tin leads shaded area shall be solder coated.

10. This connector is not to be used with ceramic circuit boards.

11. Connectors shall be marked in approximate location shown with part number, manufacturer's CAGE number and date code with contrasting ink in characters 0.06 (1.52 mm) inch high.

12. All markings shall be permanently and legibly marked in accordance with MIL-STD-1285.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:56Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1 and table I.

Material: Contacts shall be brass, QQ-B-613, alloy 260, temper 1/2 hard.

Connector body shall be molded thermoplastic in accordance with MIL-M-24519 or molded plastic, diallylphthalate resin, GL filler, MIL-M-14, Type GDI-30F or Type SDG-F.

The contact shield shall be aluminum alloy 5052, QQ-A-250/8, H34, or glass-epoxy, GF-0160-00/00-0-1-X, MIL-P-13949.

Plating: Contacts shall be finished on all exposed surfaces.

Selectively solder coat the leads as shown in the shaded area with QQ-S-571, SN60 or SN63, in accordance with MIL-STD-2000 to a thickness of 0.0005 (0.0127 mm) inch to 0.003 (0.076 mm) inch. Use flux, MIL-F-14256, type RMA.

All aluminum alloy parts shall have an anodic coating in accordance with MIL-A-8625, type III, class 2, black.

Key pin holes:

For M28754/97 material, $0.114\ ^{+0.000}_{-0.005}$ ($2.896\ ^{+0.000}_{-0.127}$ mm) inch diameter X 0.150 (3.810 mm) inch deep.

C'bore $0.134\ ^{+0.005}_{-0.000}$ ($3.404\ ^{+0.127}_{-0.000}$ mm) inch diameter X

$0.020\ ^{+0.005}_{-0.000}$ ($0.508\ ^{+0.127}_{-0.000}$ mm) inch deep.

Three equally spaced 0.010 (0.254 mm) inch radius beads X 0.150 (3.810 mm) inch deep around the periphery of the 0.114 (2.896 mm) inch diameter shall be utilized.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:56Z
Check the source to verify that this is the current version before use.

ELECTRICAL REQUIREMENTS:

Dielectric withstanding voltage: The connector shall meet the requirements of MIL-STD-1344, Method 3001, test condition I for 600 VAC (RMS) 60 Hz, or 850 VDC. The point of measurement shall be between adjacent contacts.

Low level signal contact resistance: Voltage drop shall not exceed 1.2 millivolts (mV). Wire size is not applicable.

Contact resistance: Voltage drop shall not exceed 30 mV at 3 Amps current.

Voltage rating: 300 Volts, AC (RMS), at sea level.

Durability: In accordance with MIL-C-28754, voltage drop shall not exceed 35 mV after testing.

Solderability: In accordance with MIL-C-28754.

Military part number: M28754/97- (Dash number from table I)

TABLE I. Dash numbers.

Dash number	X	Y	Body material
-1	0.112	0.050	Type GDI-30F or SDG-F
-2	0.092	0.070	

Warning: The GLT-30F may be susceptible to stress cracking when exposed to certain cleaning solvents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:56Z
Check the source to verify that this is the current version before use.

Qualification information: The connector shall meet the qualification test of MIL-C-28754, table IV, type IV, except for Subgroup IV, Fin/Header torque, Fin cantilever load, and Guide rib strength test.

Number of units to be inspected: Twelve (12) units of each dash number to be qualified shall be inspected. See MIL-C-28754 Appendix for exceptions when qualifying similar parts, or contact the qualification activity.

Backplane contacts: Low Insertion Force (LIF) contacts in accordance with MIL-C-28859 or MIL-C-28754 are strongly recommended for use with this connector.

Compatibility: These connectors may be used with the frames described in MIL-C-28754/94.

Supersession data: Supersedes Naval Air Systems Command Drawing Number SK-MEL-2150, Code Identification Number 30003, and SK-MEL-2152.

Custodian:
NAVY - SH

User activities:
NAVY - AS

Agent:
NWSC, Crane

Preparing activity:
NAVY - SH

(Project 5935-N350-01)

*U.S. GOVERNMENT PRINTING OFFICE: 1990--704-034/30220

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:56Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-28754/97(SH)	Connectors, Electrical, Modular, Type IV, Connector, 150 Contact, Right Angle, Contact Tails on 0.100 Centers

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:56Z
Check the source to verify that this is the current version before use.