INCH-POUND

MIL-M-28787/421
AMENDMENT 1
29 September 1993

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

NATO-STD-4156(MODIFIED) CHANNEL CONTROL MODULE, KEY CODE ATK

This amendment forms a part of Military Specification MIL-M-28787/421, dated 17 May 1991, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 4

TABLE I: Delete and substitute new table I as printed on page 3 of this amendment.

PAGE 31

6.5, eighth line: Delete "Naval Weapons Support Center (Code 607)" and substitute "Naval Surface Warfare Center, Crane Division (Code 603)".

PAGE 35

TABLE III, Test conditions B9-B22, Max column: Delete "1" and substitute "3".

PAGE 36

TABLE III, NOTE 1: Delete and substitute the following:
"1. Continuity test tolerance table.

Condition	Value	Accuracy	Test condition
Continuity	NA	± 0.05 Ohm	B1-B8
Measurement	NA	± 0.15 Ohm	B9-B22

"

AMSC N/A FSC 5963
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-20T18:13Z
Check the source to verify that this is the current version before use.

PAGE 78

FIGURE 11a: Delete and substitute new figure 11a as printed on page 4 of this amendment.

Custodians:
Army - ER
Navy - NW
Air Force - 85

Review activities:
Army - AT
Navy - AS, MC
Air Force - 13, 19
DLA - ES

Preparing activity:
Navy - NW

(Project 5963-0283)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:13Z
Check the source to verify that this is the current version before use.

TABLE I. Module electrical requirements

Test cond	Parameter 5/	Ref test table	Test type 1/-3/	25±5°C 4/		Class I 4/ 0 ± 5°C 60 ± 5°C		Class II 4/ -55 ± 5°C 85 ± 5°C		Units
				Min	Max	Min	Max	Min	Max	
A1	Isolation	II	S	10	INF	10	INF	10	INF	MOhm
	End-of-Life	II	S	1	INF	1	INF	1	INF	MOhm
A2 A18	Isolation	II	X	10	INF	10	INF	10	INF	MOhm
	End-of-Life	II	X	1	INF	1	INF	1	INF	MOhm
B1-B8	Continuity	III	X	0	1	0	1	0	1	Ohm
B9-B22	Continuity	III	X	0	3	0	3	0	3	Ohm
C	Vcc stress	IV	S	----------Module shall pass all remaining tests----------						
D1	Ibd	V	S	-0.024	1.02	-0 024	1.02	-0.024	1 02	mA
D2	Ibd	V	S	-0 024	0.12	-0.024	0.12	-0.024	0 12	mA
D3	Ibd	V	S	0.0	0.1	0.0	0.1	0.0	0.1	mA
D4	Ibd	V	S	-0.098	0.20	-0 098	0 20	-0 098	0 20	mA
D5-D8	Ibd	V	S	-0.024	0.12	-0 024	0.12	-0.024	0 12	mA
D10-D15	Ibd	V	S	0 0	0 1	0 0	0.1	0 0	0.1	mA
D16	Ibd	V	S	0 0	1.0	0 0	1 0	0 0	1 0	mA
D17	Ibd	V	S	0.0	0.1	0 0	0 1	0 0	0.1	mA
D18	Ibd	V	S	0.0	2.0	0 0	2 0	0 0	2.0	mA
D19	Ibd	V	S	0.0	1 0	0 0	1.0	0 0	1 0	mA
D20-D22	Ibd	V	S	-0.024	1 02	-0 024	1.02	-0 024	1.02	mA
E1-E5	Ios	VI	S	-225.0	-50.0	-225 0	-50.0	-225.0	-50.0	mA
E6	Ios	VI	S	-3 24	-1 1	-3 24	-1 1	-3.24	-1 1	mA
E7	Ios	VI	S	-120.0	-15 0	-130 0	-15.0	-130.0	-15 0	mA
E8,E9	Ios	VI	S	-150.0	-60 0	-150 0	-60 0	-150.0	-60 0	mA
E10	Ios	VI	S	-100.0	-40.0	-100.0	-40.0	-100.0	-40.0	mA
E11	Ios	VI	S	-150.0	-60 0	-150 0	-60 0	-150.0	-60.0	mA
E12	Ios	VI	S	-225.0	-50.0	-225 0	-50.0	-225.0	-50.0	mA
E13-E16	Ios	VI	S	-150.0	-60 0	-150.0	-60.0	-150.0	-60.0	mA
E17-E19	Ios	VI	S	-225.0	-50 0	-225 0	-50.0	-225.0	-50.0	mA
E20	Ios	VI	S	-100.0	-40.0	-100.0	-40.0	-100.0	-40.0	mA
E21-E36	Ios	VI	S	-150.0	-60.0	-150.0	-60.0	-150.0	-60 0	mA
F1	Iih	VII	X	-1.55	-0.56	-1 55	-0.56	-1.55	-0.56	mA
F2	Iih	VII	X	-1.75	-0.59	-1.75	-0.59	-1.75	-0.59	mA
F3	Iih	VII	X	-0 6	0 02	-0 6	0.02	-0.6	0.02	mA

- See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 20260-20T18:13Z
Check the source to verify that this is the current version before use.

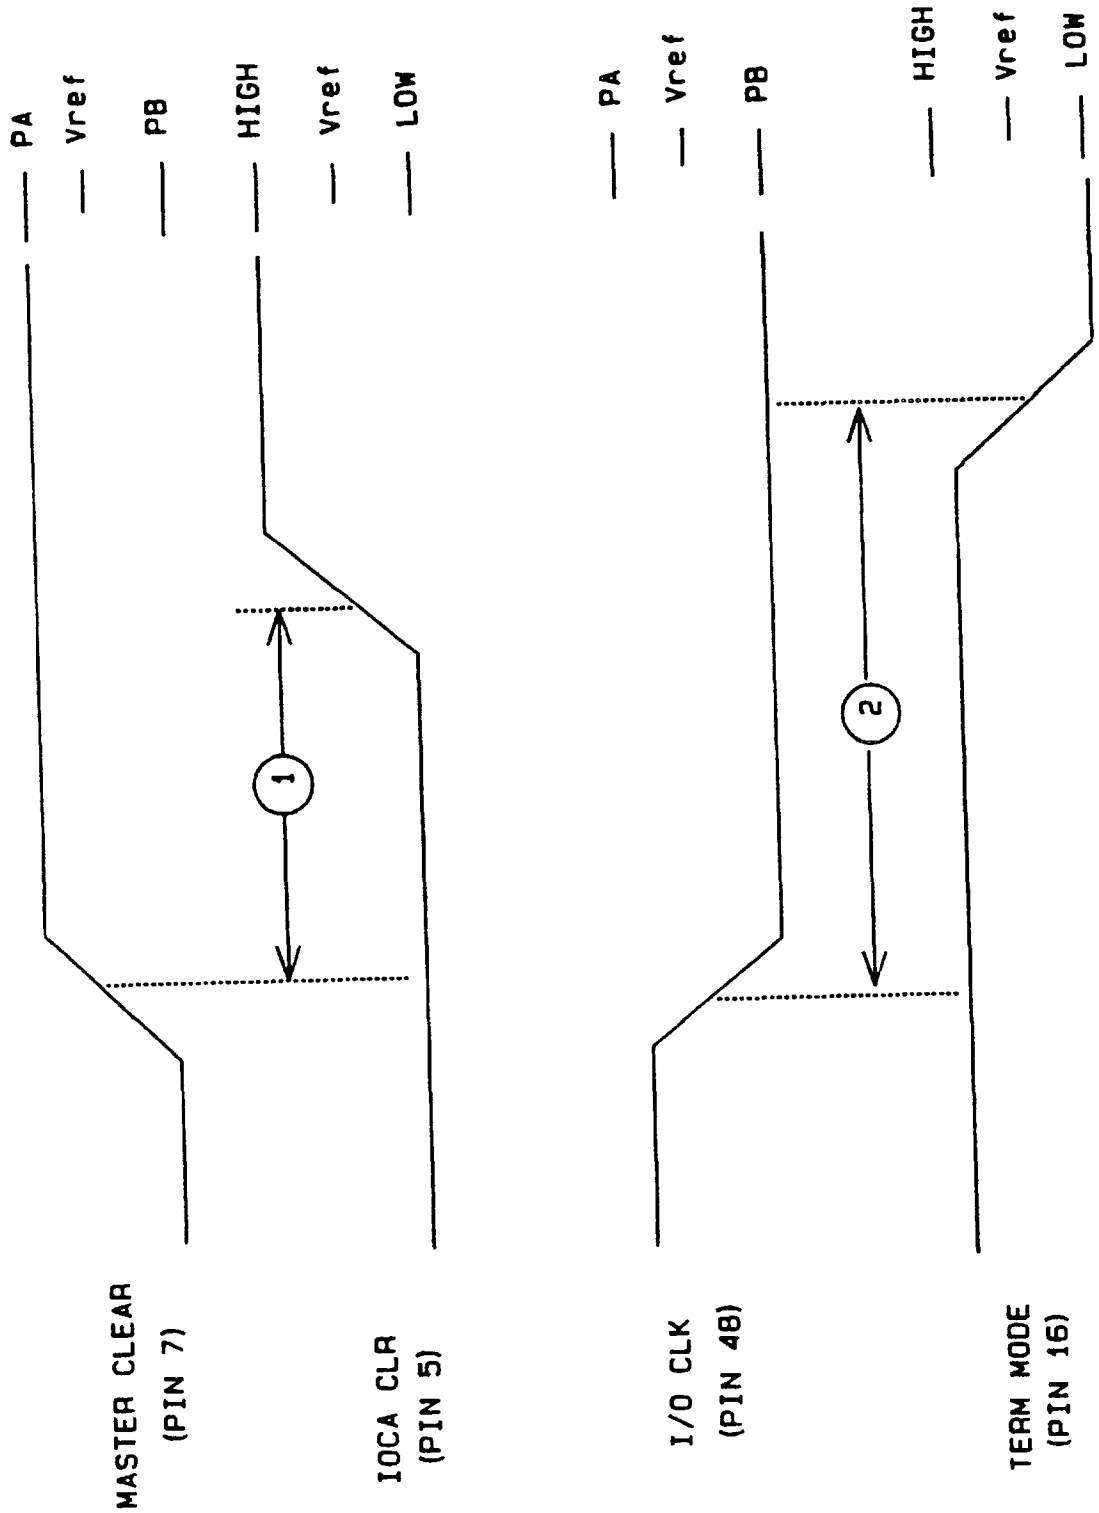


FIGURE 11a. Dynamic waveforms for table XVII.

Source: https://assist.dla.mil -- Downloaded: 202610-20T18:13Z
Check the source to verify that this is the current version before use.